

acouflor  
making quiet



LaidBack™ Suburban  
Carpet Tiles

# Specifications

|                  |                                     |
|------------------|-------------------------------------|
| Application      | Floor                               |
| Backing          | Felt polyester + fibreglass         |
| Pile material    | Solution dyed nylon                 |
| Style            | Multi-level textured loop pile      |
| Recycled content | Backing made from >80% recycled PET |
| Dimensions       | 500 x 1000mm                        |
| Thickness        | 7.5mm +/- 10%                       |
| Tiles per box    | 20 tiles (10m²)                     |
| Classification   | Commercial Extra Heavy Duty*        |

\*conditions apply

# Guarantees

|                        |           |
|------------------------|-----------|
| Wear warranty          | 15 years* |
| Castor chair proof     | 10 years* |
| Anti-static            | Lifetime* |
| Colorfastness warranty | 20 years* |

\*conditions apply

# Shipping



QuickShip

QuickShip products can be despatched within **24 hours**.

# Technical Data

|                           |                                                                                                         |
|---------------------------|---------------------------------------------------------------------------------------------------------|
| Fire test method          | AS/ISO 9239.1-2003                                                                                      |
| Critical heat flux        | Mean result 7.0kW/m²                                                                                    |
| Smoke deviation rate      | Mean result 118%.min                                                                                    |
| Dimensional stability     | -0.05%                                                                                                  |
| Electrostatic propensity  | <0.3000 kv                                                                                              |
| Thermal resistance        | 0.68m²K/W                                                                                               |
| Total VOC test method     | SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017                              |
| Total VOC result          | ≤ 0.5mg/m³ or less                                                                                      |
| Colorfastness test method | ISO 105-B02                                                                                             |
| Rating                    | 6-7                                                                                                     |
| Mildew and Odour          | HN 0028-2004 Determination of Mildew Growth and Odour on Trim Material.<br><b>Rating</b> = satisfactory |

# Sustainability



Backing made from 80% min. recycled PET




Red List Free Declare Label



# Acoustic Performance


|               |                                                                                                                              |
|---------------|------------------------------------------------------------------------------------------------------------------------------|
| Test method   | ASTM C423-2022: Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method |
| Rating method | AS ISO 11654 -2002: Acoustics - Rating of sound absorption - Material and sytems                                             |
| Test results  | NRC 0.25   SAA 0.22                                                                                                          |

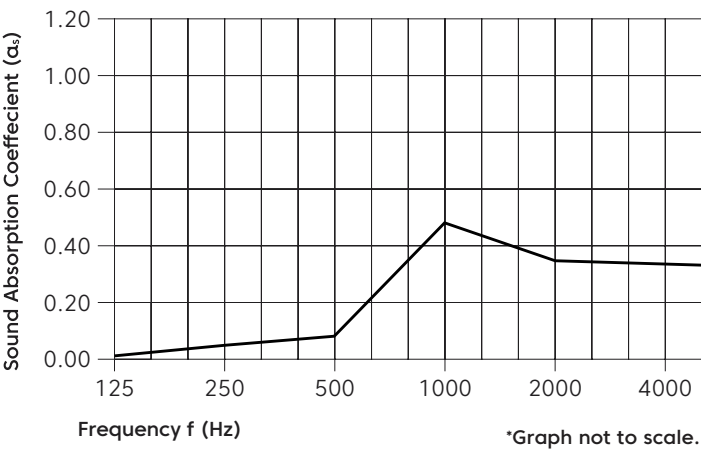


|  | Frequency (Hz) | 125  | 250  | 500  | 1000 | 2000 | 4000 | NRC  |
|--|----------------|------|------|------|------|------|------|------|
|  | αs             | 0.01 | 0.05 | 0.09 | 0.48 | 0.37 | 0.35 | 0.25 |

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results. **Sound Absorption Average (SAA)** indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz

# Configurations




Herringbone



Ashlar



Monolithic




Non-Directional




# Colorways

---

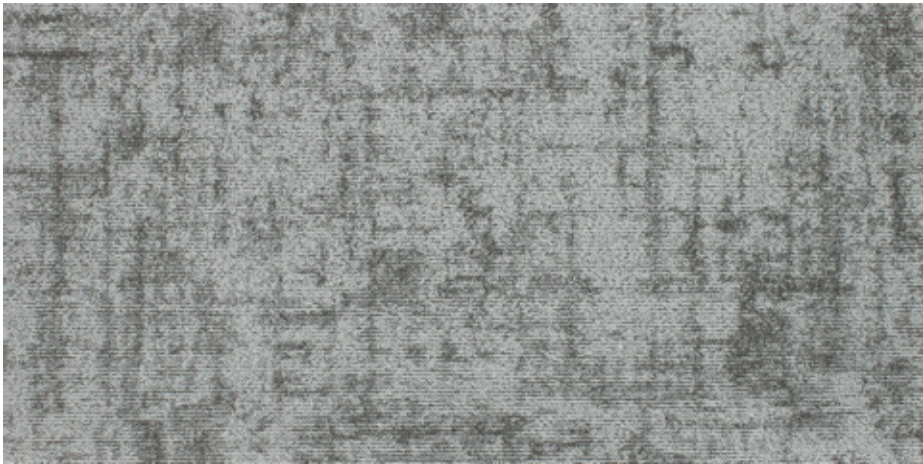


Ascot – SU06

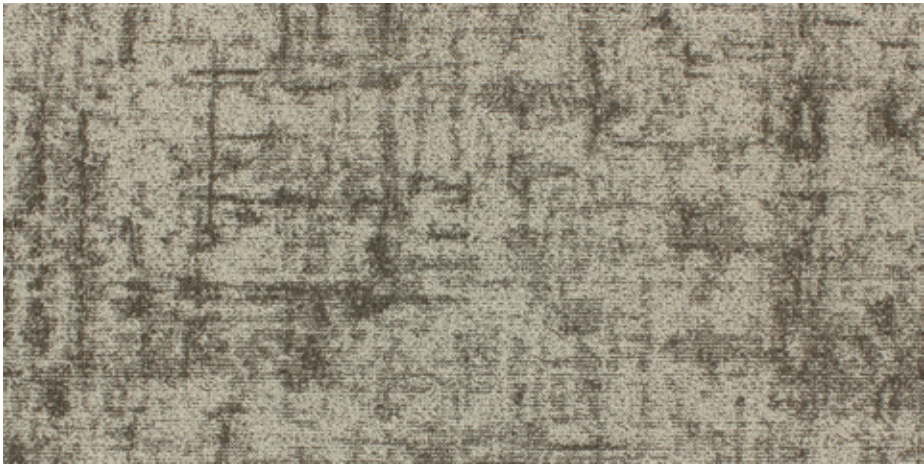


Deakin – SU08




Devonport – SU05

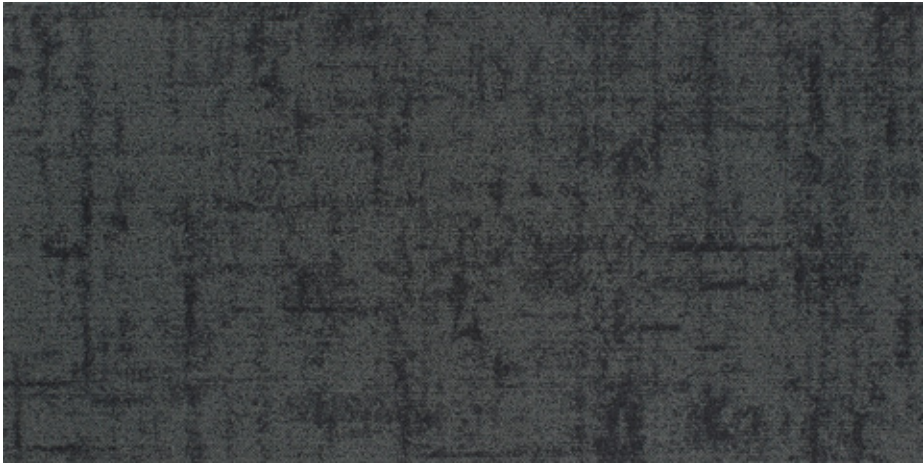


Fremantle – SU04

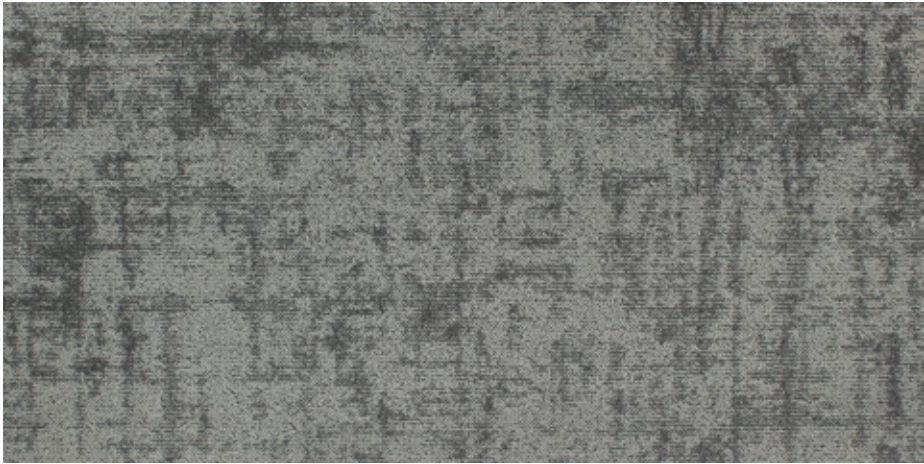


Richmond – SU02

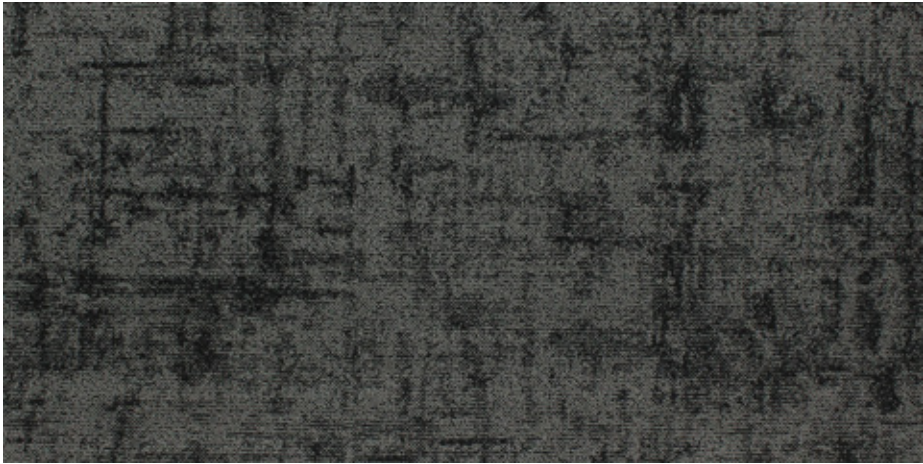

Eaton – SU07

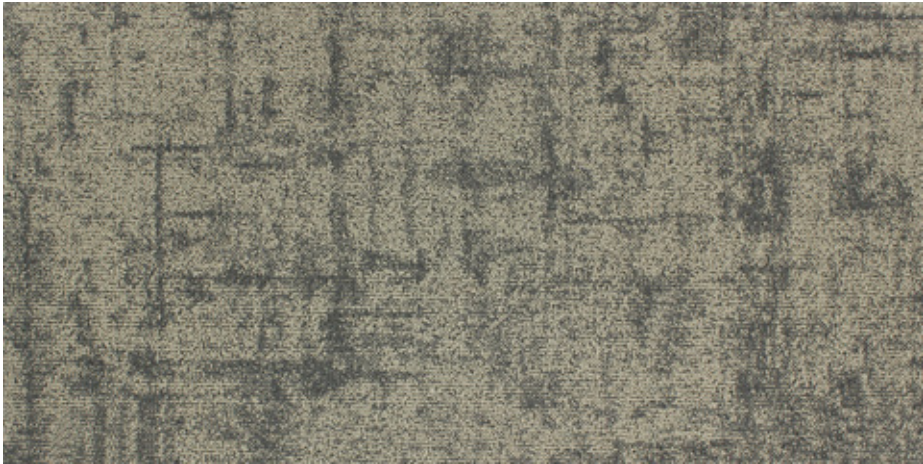

Manly – SU01

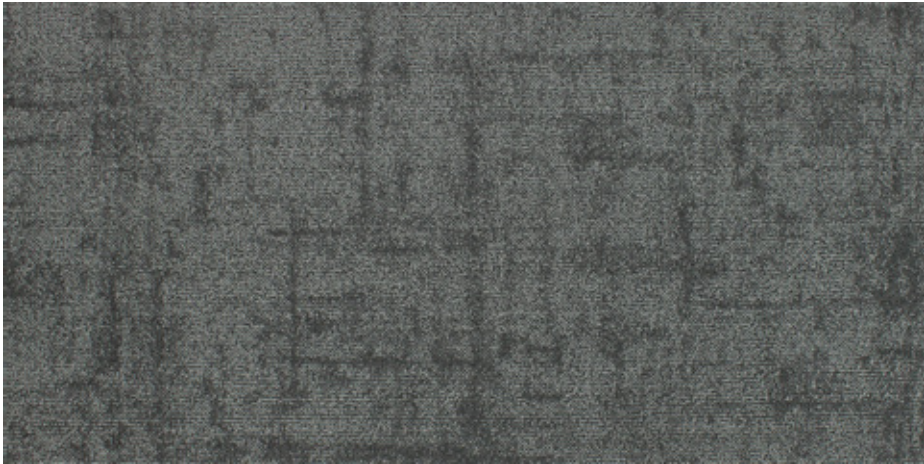

Tusmore – SU03