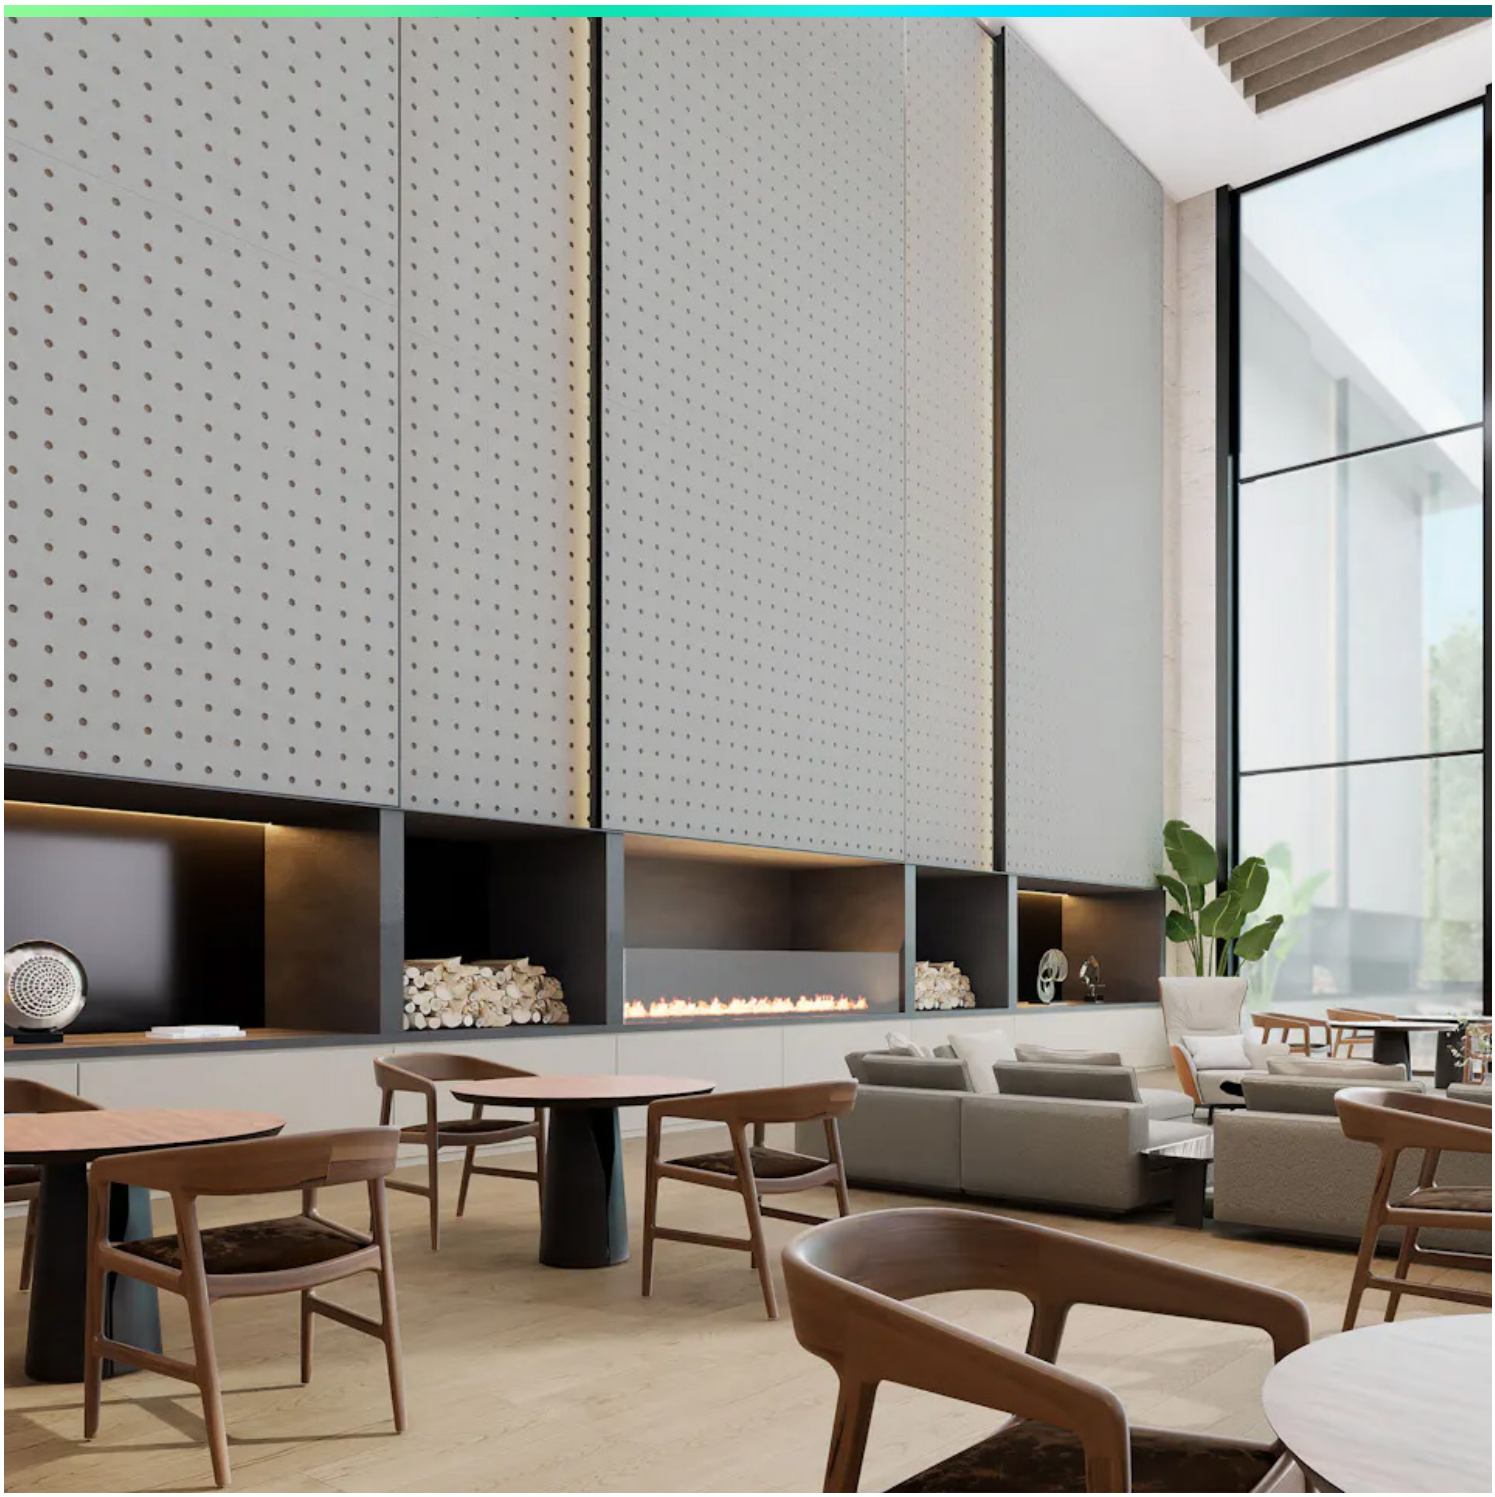

Pixel

Wall Panels

Premier Collection

Pixel is a double-layer acoustic wall covering with precision patterns cut into the outer layer to reveal the second layer beneath. Adding depth, texture, pattern, color, and sound absorption, these soundscaping elements work together to make quiet beautiful. Choose any two colors from the Acoufelt palette to create your Pixel pattern.

Specifications

Surface	Wall
Material	FilaSorb™ polyester felt
Weight	14mm, 2800gsm (12mm Face, 2mm Backing) 24mm, 4800gsm (12mm Face, 12mm Backing)
Standard Sizes	1200mm W x 2800mm H *Custom sizes available*

Pixel Wall Panel with Rectangle Pattern in Kale and Thistle

Pixel Wall Panel with Triangle Pattern in Popcorn and Almond

Technical

NRC Rating	**14mm*** 0.55, no air gap 0.70, 20mm air gap 0.75, 50mm air gap **24mm*** 0.60, no air gap
Fire Test	AS ISO 9705:2003 according to AS 5637.1:2015 Group 1 2.99
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

** Test results available upon request.*

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

** PET is recyclable through participating partners.*

© 2026 Acoufelt. All rights reserved.

Colorways

White
WH12

Milkyway
MI74

Ivory
IV11

Pearl
PE21

Valentine
VA70

Quartz
QU67

Stonewash
ST72

Sea Salt
SE57

Platinum
PL04

Almond
AL55

Pistachio
PI25

Turmeric
TU60

Flamingo
FL61

Amethyst
AM69

Periwinkle
PE23

Peacock
PE20

Metal
ME03

Mushroom
MU75

Celery
CE65

Wheat
WH68

Peach
PE19

Lilac
LI13

Marine
MA15

Sencha
SE58

Grey
GR02

Umber
UM54

Wasabi
WA29

Popcorn
PO26

Currant
CU59

Berry
BE06

Azure
AZ05

Oregano
OR18

Charcoal
CH01

Walnut
WA56

Eucalyptus
EU71

Carrot
CA08

Loganberry
LO77

Granite
GR62

Denim
DE09


Kale
KA12


Piano Black
PI24

Slate
SL27

Nori
NO76


Peppercorn
PE22


Shiraz
SH63


Flint
FL64


Midnight
MI16

© 2026 Acoufelt. All rights reserved.

Sizes

Standard Sizes 1200mm W x 2800mm H

Custom sizes available

Plan

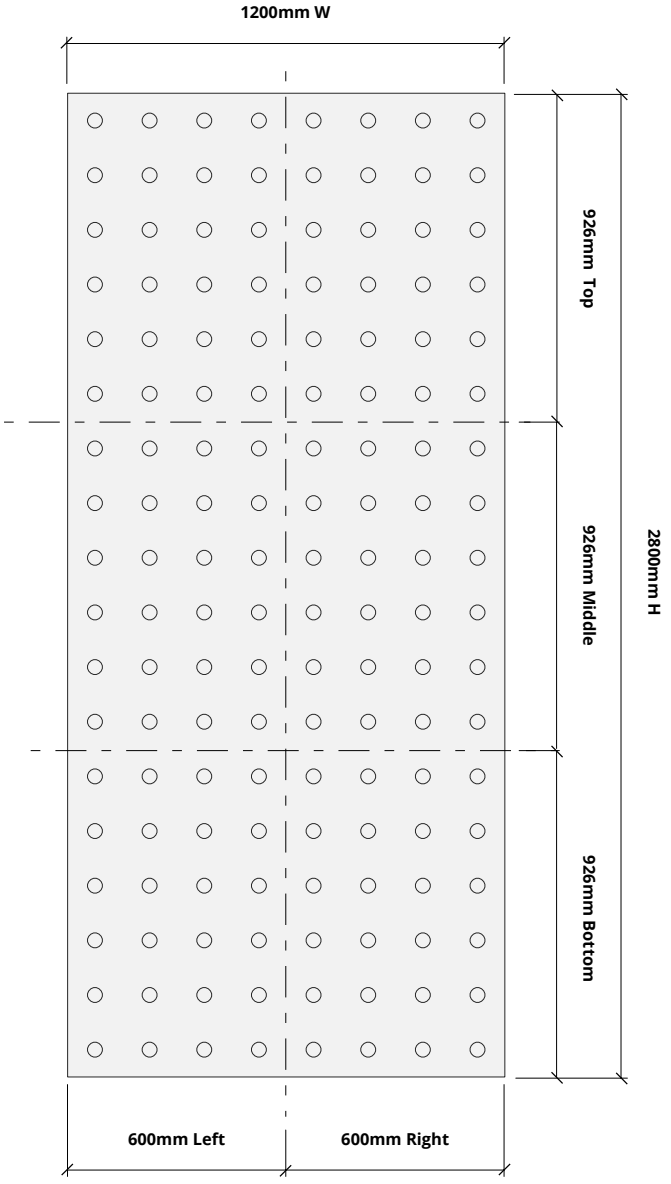

Perspective

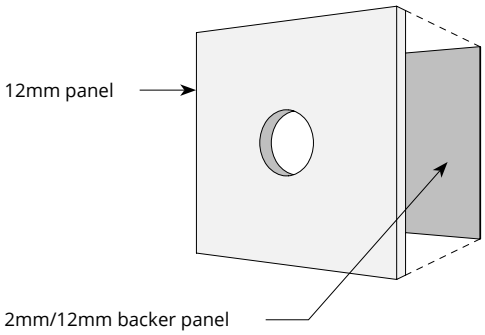

** Product available as full panels or as sections of a panel as filler pieces.*
Choose any of the standard height or segments (i.e. bottom right, mddle left, etc) to fill the space as needed.

© 2026 Acoufelt. All rights reserved.

How to Specify

1. Choose Panel Pattern **2. Choose Colorways**

Select desired panel pattern.



CIRCLE



SQUARE



TRIANGLE



RECTANGLE



RIGHT TRIANGLE

1. Choose Panel Pattern **2. Choose Colorways**

Select two colors: one for the face panel and one for the back panel to create a Pixel that is uniquely yours. See colorways on page 3.



Square in Marine and Sea Salt

© 2026 Acoufelt. All rights reserved.

Mounting Methods

Adhesive backing

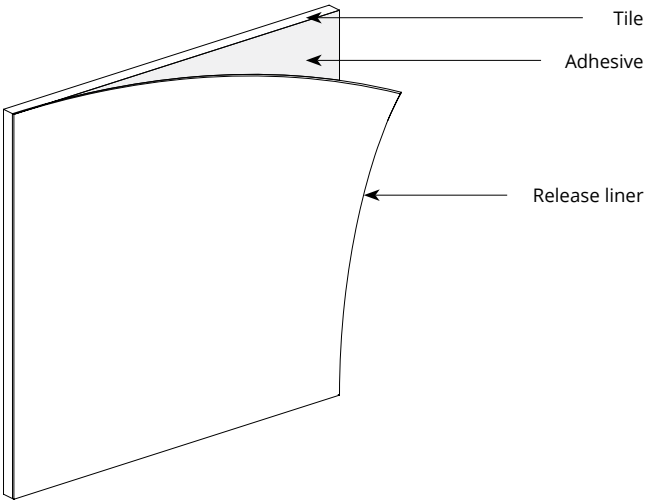

Construction adhesive

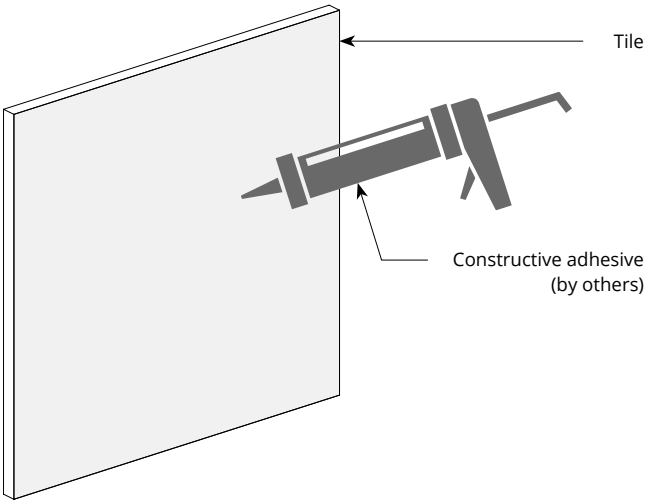

Z-clip wall mount

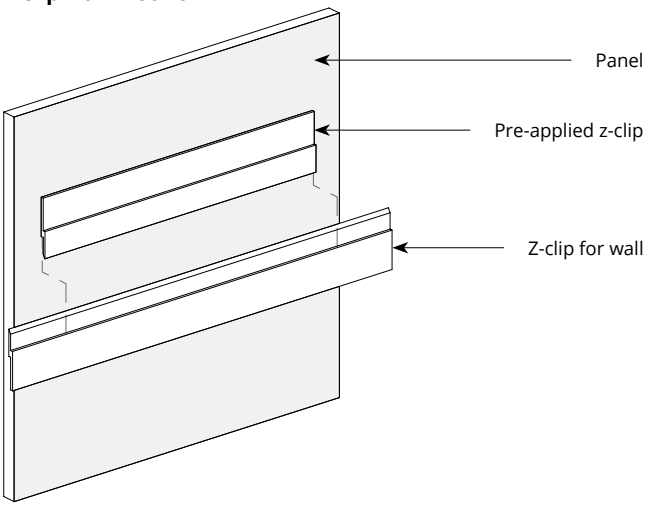

© 2026 Acoufelt. All rights reserved.

Acoustic Performance

Test Method	ISO 354-2006
Install Method	A
Rating Method	ISO 11654-2002
Test Results	**14mm** NRC 0.55, no air gap NRC 0.70, 20mm air gap NRC 0.75, 50mm air gap SAA 0.56, no air gap SAA 0.70, 20mm air gap SAA 0.76 50mm air gap **24mm** NRC 0.60, no air gap

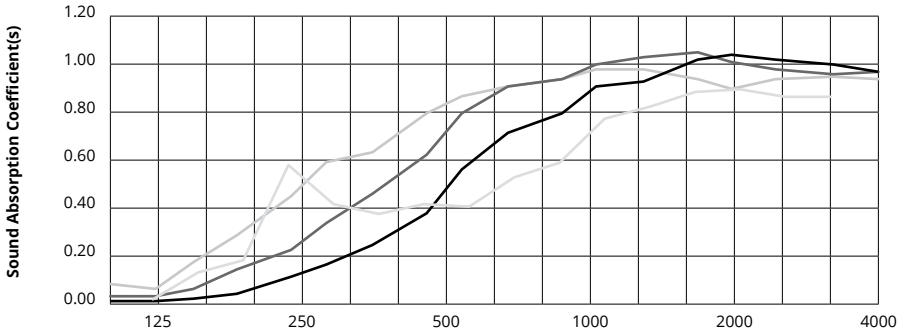

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	14mm	0.01	0.11	0.37	0.78	1.00	0.98	0.55
	14mm, 20mm air gap	0.03	0.22	0.61	0.93	1.03	0.94	0.70
	14mm, 50mm air gap	0.06	0.44	0.78	0.92	0.92	0.93	0.75
	24mm	0.02	0.57	0.41	0.58	0.87	0.85	0.60

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

© 2026 Acoufelt. All rights reserved.