



Baffles

FilaSorb™ 22

acoufelt
making quiet

Product Detail

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min
Dimensions	Linear – 200 x 2800mm Ripple – 600 x 2800mm Wing – 200 x 120 x 2800mm
Thickness	22mm +/- 10%
Qty per carton	Linear – 6 Ripple – 2 Wing – 6

QuickShip

QuickShip Standard (Made to Order)



Our standard made to order products have an approx. **2-3 week** lead time from payment and order confirmation.

Technical Data

Fire rating	AS/ISO 9705.1, Group 1
	ASTM E84-17a, Class A
Indoor air quality	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017, ≤ 0.5mg/m ³
Light fastness	ISO 105-B02, 6-7


Sustainability



Made from 60% min. recycled content



Red List Free Declare Label



Generated using 40% solar energy



Recyclable at end-of-life



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)




Phenol & formaldehyde free



Acoustic Performance

Test method ISO 354-2006
Results NRC 0.75 ("J" Mounting Method)

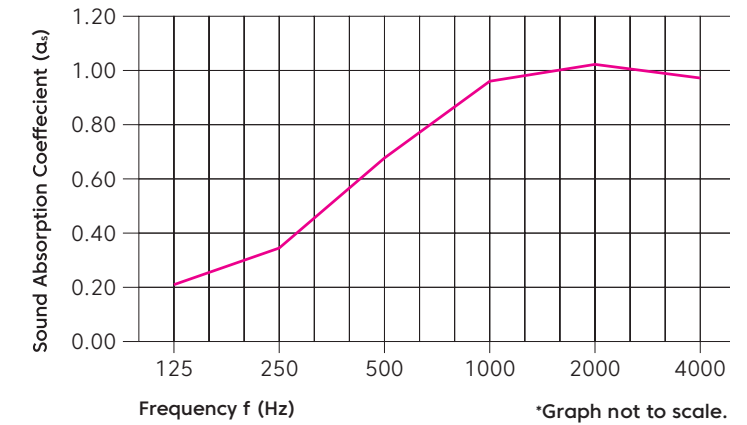

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
α _s	0.23	0.35	0.67	0.93	1.06	0.94	0.75

Guarantees


Warranty against defects 20 years*
Light fastness warranty 20 years*

*conditions apply


Designs

Linear

Elevation

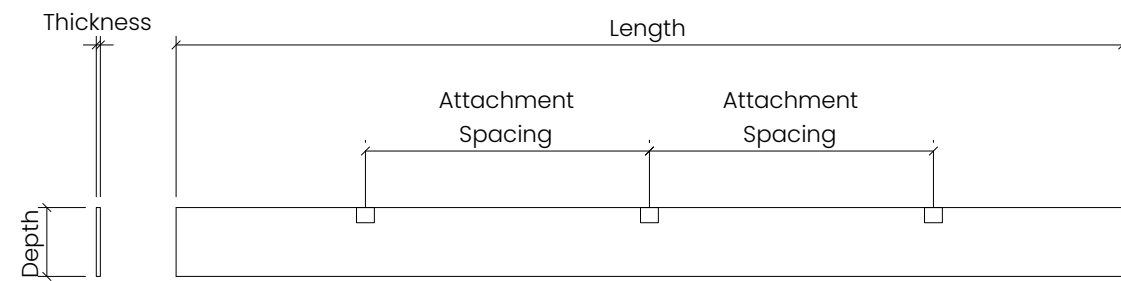


Perspective

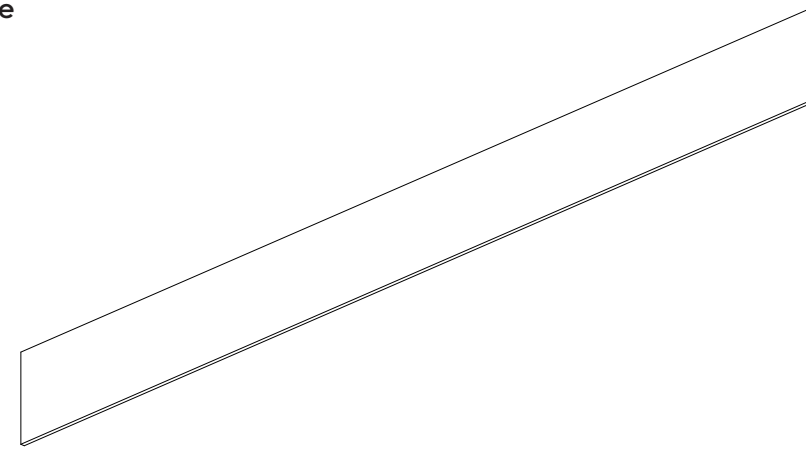


Ripple

Elevation

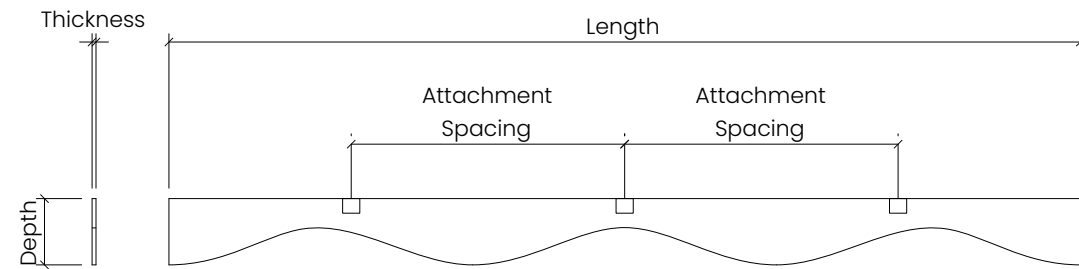


Perspective

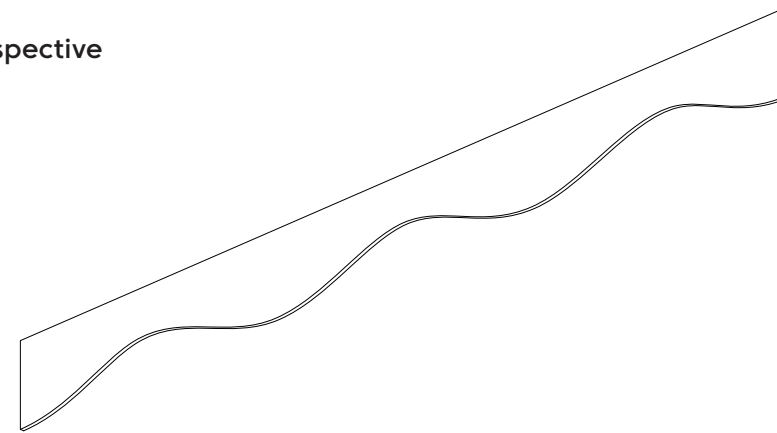


Wing

Elevation

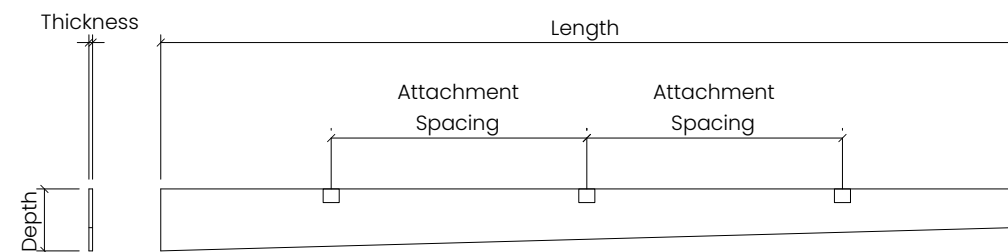

Perspective

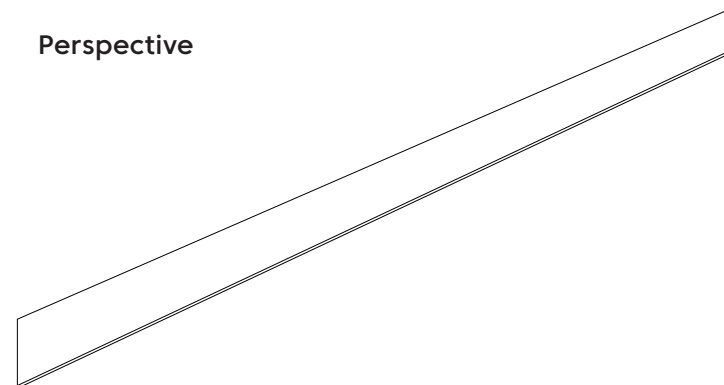


Colorways

Light Reflectance Values (LRV), are **a measure of the percentage of visible and usable light that is reflected from a surface** when illuminated by a light source.



White
LRV - 83.22%

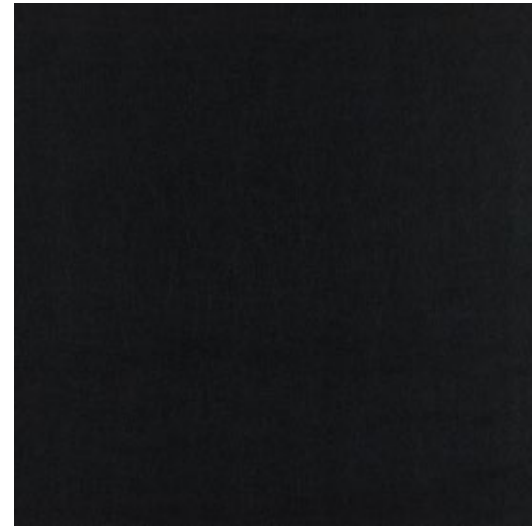


Piano Black
LRV - 3.00%




Grey
27.00%

Mounting Method


Cable

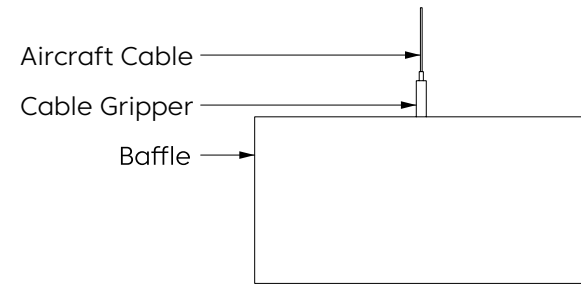


Cable To Deck

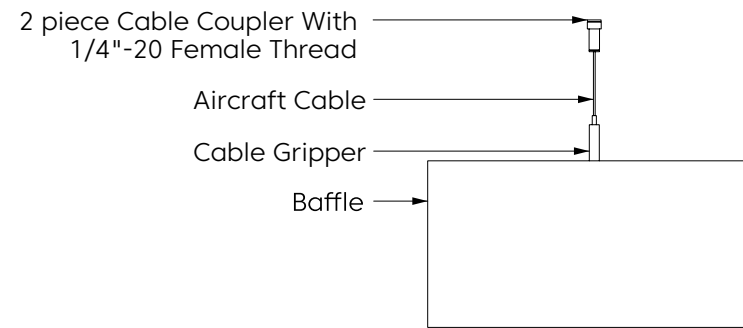


Cable To T Grid

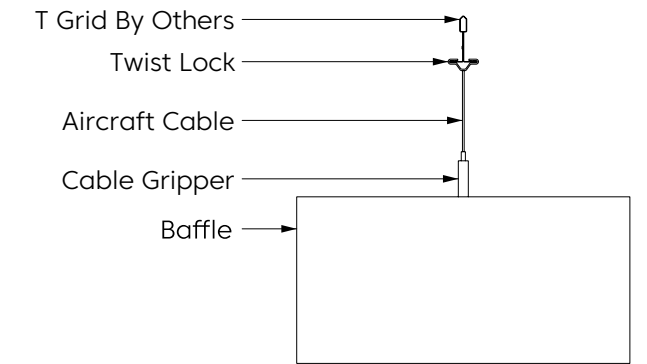

Cable To Unistrut

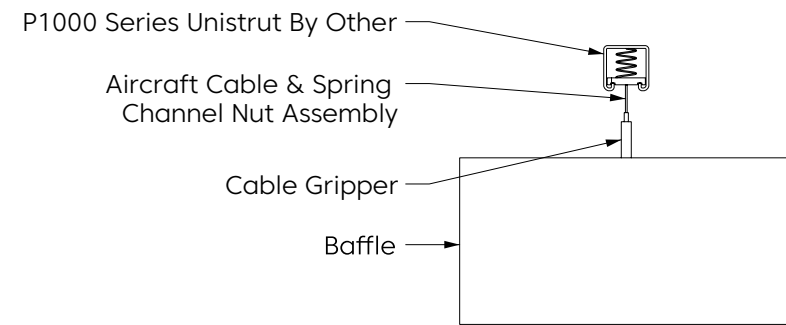

Swivel Cable To Deck

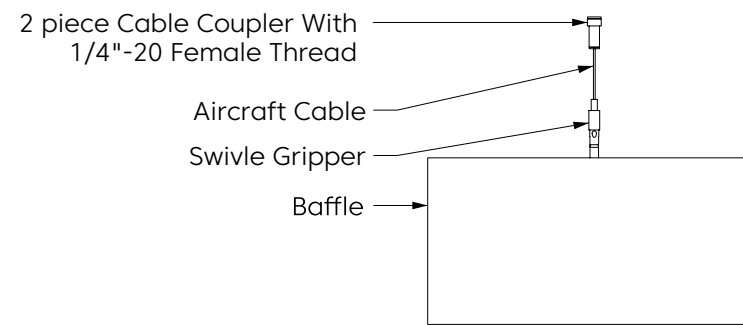

Magnet To T Grid

