



## Blox, Angled Ceiling Clouds

Premier Collection


Pacify problematic sound by beautifully boxing up the racket. An angled insert creates visual movement with help from a range of cloud sizes, lighting, and color. Blox ceiling clouds offer a fresh take on noise reduction, inviting you to customize your space with Premier colors from subtle to bold shades, realistic WoodGrain patterns, or your own combination inside and out. Blox puts total creativity in your hands.

## Specifications

<b>Surface</b>	Ceiling
<b>Material</b>	FilaSorb™ polyester felt
<b>Weight</b>	2400gsm
<b>Standard Sizes</b>	508 x 1220 x 508mm (W x L x H) 1220 x 1220 x 508mm (W x L x H)



Blox, Deep Ceiling Cloud in Valentine, Quartz and Umber

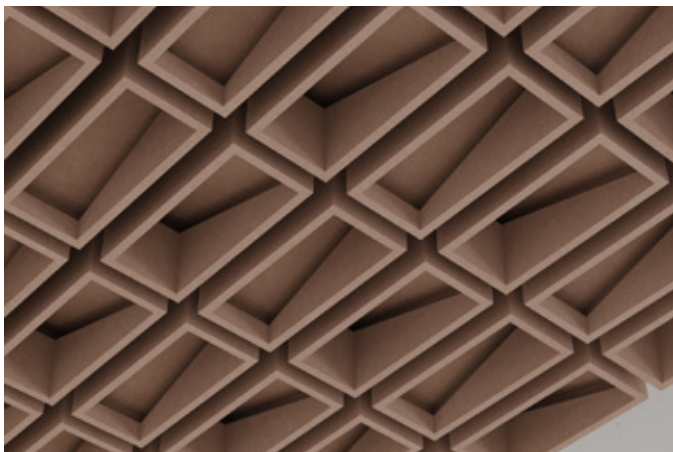

Blox, Deep Ceiling Cloud in Valentine

## Technical

<b>NRC Rating</b>	Pending product testing
<b>Fire Test</b>	AS ISO 9705:2033 (according to AS 5637.7:2015 requirements) Group 1 0.93
<b>Water Sorption</b>	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
<b>Colorfastness</b>	ISO 105-B02, 6-7

## Details

<b>Lead Time</b>	Refer to Product Lead Time Matrix
<b>Origin</b>	Australia
<b>Warranty</b>	Product: 20 years* Colorfastness: 20 years*

\* Conditions apply

## Environmental

<b>Recycled Content</b>	Minimum 60%
<b>Energy</b>	Generated using 40% solar energy
<b>Indoor Air Quality</b>	VOC less than/equal to 0.5mg/m3
<b>Recyclable</b>	100%*
<b>Certifications</b>	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

\* PET is recyclable through participating partners.



For questions or additional product information,  
visit [acoufelt.com.au](http://acoufelt.com.au) or call 1800 626 462

Blox, Angled Ceiling Clouds | April 2026

							
White WH12	Milkyway MI74	Ivory IV11	Pearl PE21	Valentine VA70	Quartz QU67	Stonewash ST72	Sea Salt SE57
							
Platinum PL04	Almond AL55	Pistachio PI25	Turmeric TU60	Flamingo FL61	Amethyst AM69	Periwinkle PE23	Peacock PE20
							
Metal ME03	Mushroom MU75	Celery CE65	Wheat WH68	Peach PE19	Lilac LI13	Marine MA15	Sencha SE58
							
Grey GR02	Umber UM54	Wasabi WA29	Popcorn PO26	Currant CU59	Berry BE06	Azure AZ05	Oregano OR18
							
Charcoal CH01	Walnut WA56	Eucalyptus EU71	Carrot CA08	Loganberry LO77	Granite GR62	Denim DE09	Kale KA12
							
Piano Black PI24	Slate SL27	Nori NO76	Peppercorn PE22	Shiraz SH63	Flint FL64	Midnight MI16	



For questions or additional product information,  
visit [acoufelt.com.au](http://acoufelt.com.au) or call 1800 626 462

Blox, Angled Ceiling Clouds | April 2026



# Sizes

**Standard Width:** 508mm or 1220mm W



**Standard Length:** 1220 mm L

**Standard Height:** 508 mm H



## Plan

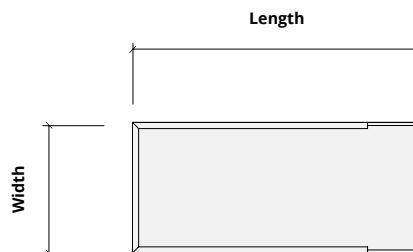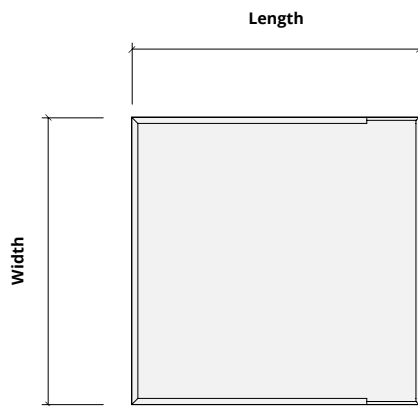

## Elevations

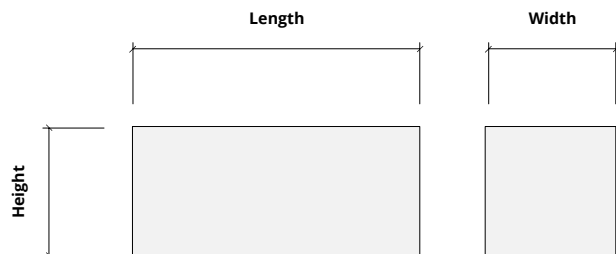
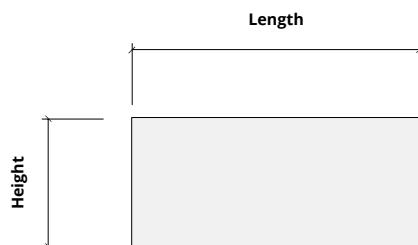


## Perspective

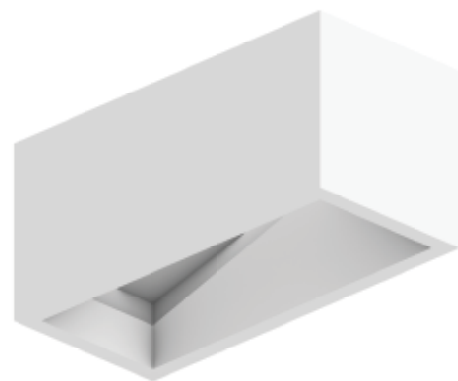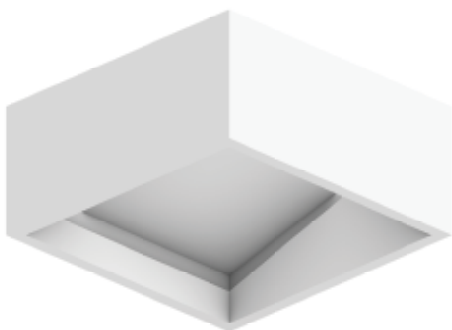

# Hardware Spacing

508mm W	470mm on centre spacing
1220mm W	1066mm on centre spacing
1220mm L	610mm on centre spacing

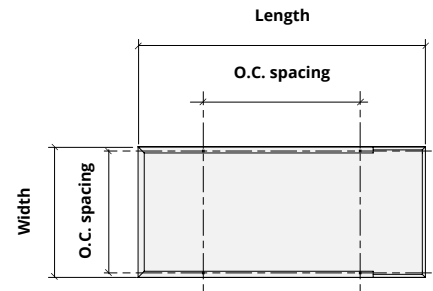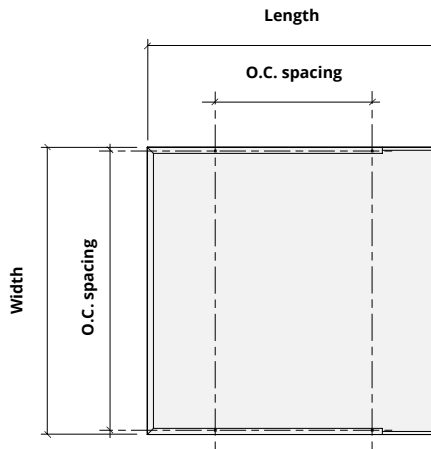

## How to Specify

1. Choose Sizes

2. Choose Colorways

3. Optional Lighting

Blox sizes and shapes can be mixed to create desired design. See Blox, Deep and Shallow specification sheets for additional information.

1. Choose Sizes

2. Choose Colorways

3. Optional Lighting

Select one or multiple colorways to achieve the overall desired design. See colorway choices on page 3.

1. Choose Sizes


2. Choose Colorways

3. Optional Lighting


Select lighting if desired. See enclosed lighting information sheets for additional information.

# Mounting Methods


## Cable

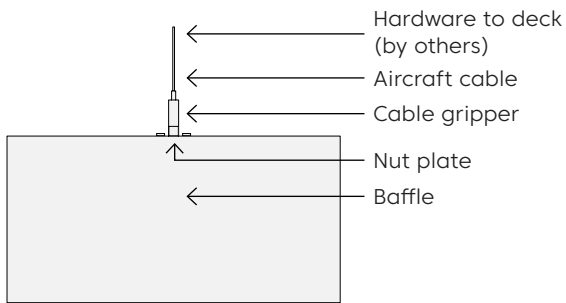

## Cable to deck

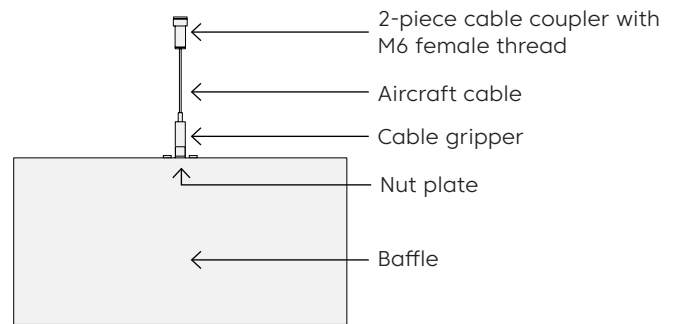


## Threaded rod

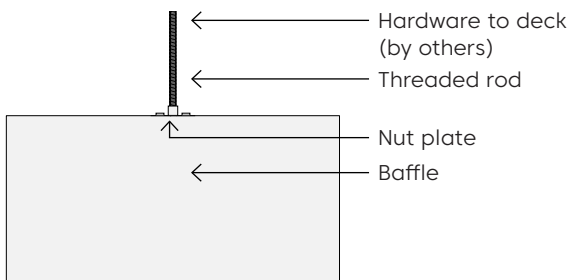

# Acoustic Performance

<b>Test Method</b>	ASTM E795-16
<b>Install Method</b>	J-600
<b>Rating Method</b>	ASTM C423-17
<b>Mounting Method</b>	Sample tested 5 baffles 2700mm " L x 305mm D x 76mm thickness, hanging 600mm from floor and 152mm from each other
<b>Test Results</b>	Pending product testing

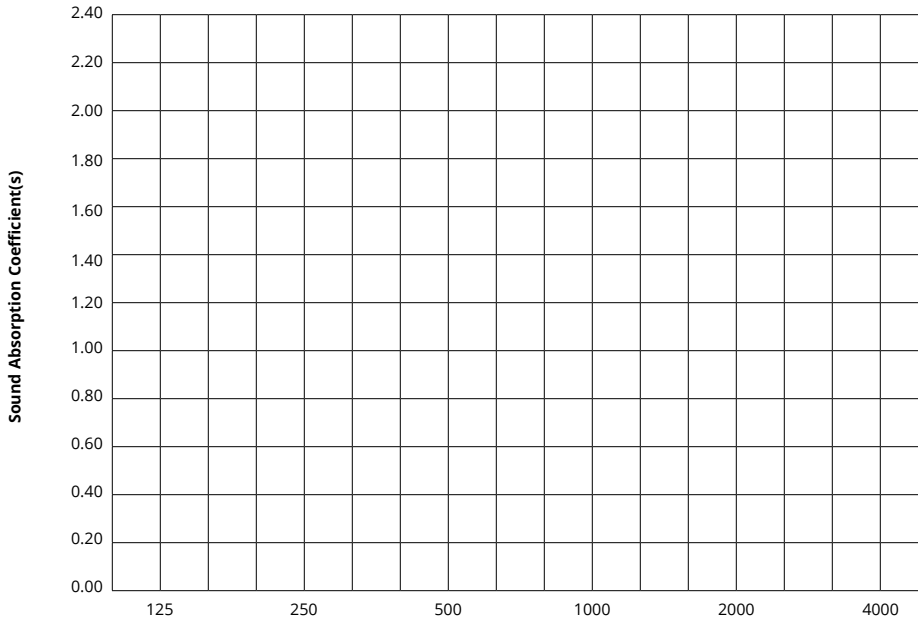


Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	Pending product testing						

## What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

*Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.*

 For questions or additional product information, visit [acoufelt.com.au](http://acoufelt.com.au) or call **1800 626 462**

**Blox, Angled Ceiling Clouds** | April 2026