acoufelt



Blox, Angled

Ceiling Clouds

WoodGrain Collection

Pacify problematic sound by beautifully boxing up the racket. An angled insert creates visual movement with help from a range of cloud sizes, lighting, and color. Blox ceiling clouds offer a fresh take on noise reduction, inviting you to customize your space with Premier colors from subtle to bold shades, realistic WoodGrain patterns, or your own combination inside and out. Blox puts total creativity in your hands.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Weight	2400gsm
Standard Sizes	500 x 1200 x 600mm (W x L x H) 1200 x 1200 x 600mm (W x L x H)



Blox, Angled Ceiling Cloud in Charred Larch

Technical

NRC Rating	Pending product testing
Fire Test	AS ISO 9705:2003 (according to AS 5637.1:2015 requirements) Group 1 0.93
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

** PET is recyclable through participating partners.*

© 2026 Acoufelt. All rights reserved.

Colorways

WOODGRAIN



Picket Fence
WQ01



Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30



White Oak
WQ13



Baltic Birch
WQ12




Knotty Spruce
WQ29



French Bobbin
WQ08



Boat Shed
WQ02



Nordic Plank
WQ15




Boardwalk
WQ10



Mocha Legno
WQ25



Mountain Lodge
WQ24



Wine Barrel
WQ03



Log Cabin
WQ04



Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21



Weathered Slate
WQ14




Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18



Charred Larch
WQ09



Shadow Oak
WQ28



Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27

© 2026 Acoufelt. All rights reserved.


Sizes


Standard Width: 600 & 1200mm W

Standard Height: 500mm H


Standard Length: 1200mm L


Plan

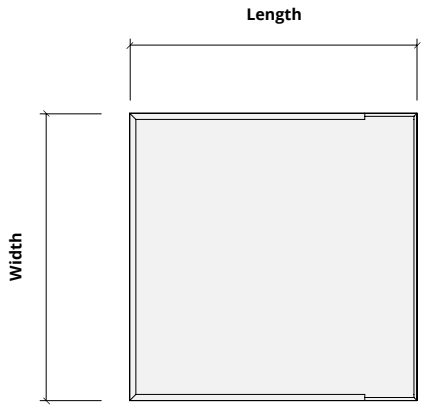

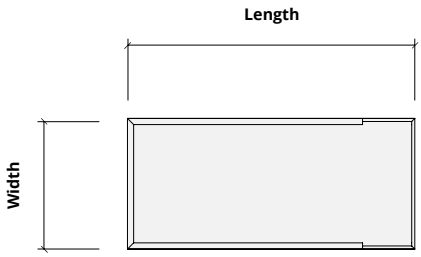



Elevations

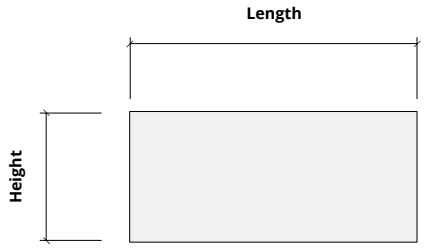

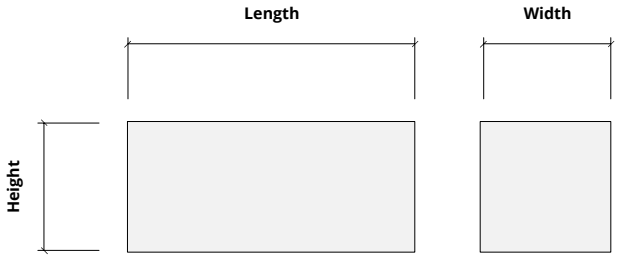

Perspective

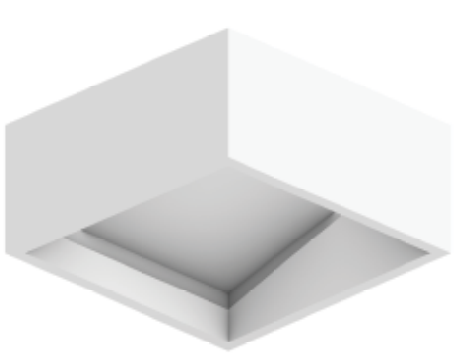


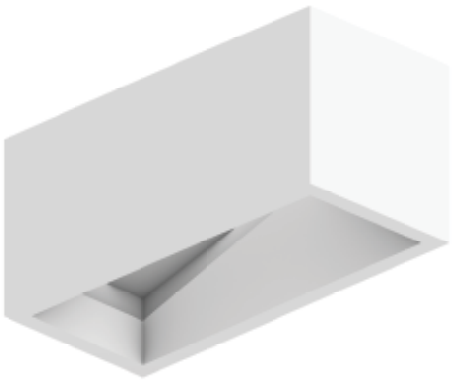


© 2026 Acoufelt. All rights reserved.

Hardware Spacing

500mm W	470mm on center spacing
1200mm W	1066mm on center spacing
1200mm L	610mm on center spacing

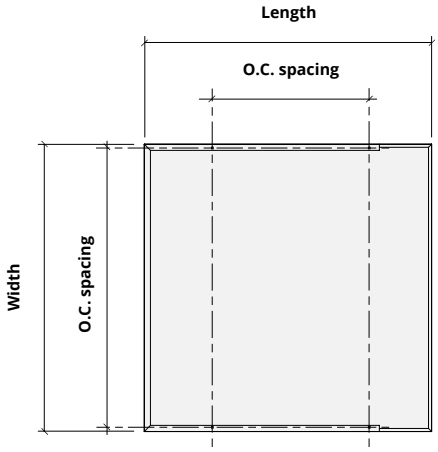

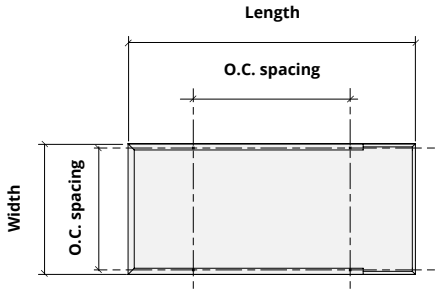

How to Specify

1. Choose Sizes | **2. Choose Colorways** | **3. Optional Lighting**

Blox sizes and shapes can be mixed to created desired design. See Blox, Deep and Shallow specificiation sheets for additional information.

---

1. Choose Sizes | **2. Choose Colorways** | **3. Optional Lighting**

Select one or multiple colorways to achieve the overall desired design.
See colorway choices on page 3.

---


1. Choose Sizes | **2. Choose Colorways** | **3. Optional Lighting**

Select lighting if desired. See enclosed lighting information sheets for additional information.


© 2026 Acoufelt. All rights reserved.

Mounting Methods


Cable

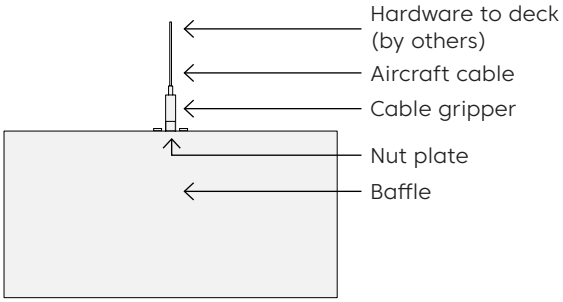

Cable to deck

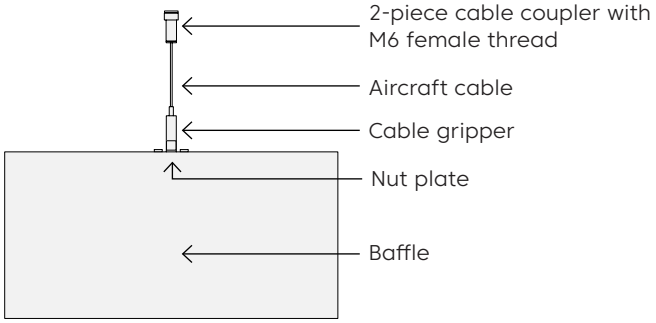


Threaded rod

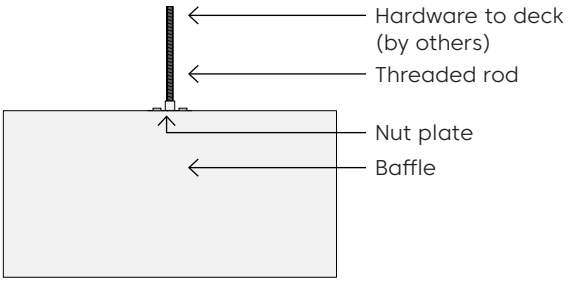

© 2026 Acoufelt. All rights reserved.

Acoustic Performance

Test Method	ASTM E795-16
Install Method	J-600
Rating Method	ASTM C423-17
Mounting Method	Pending product testing
Test Results	Pending product testing

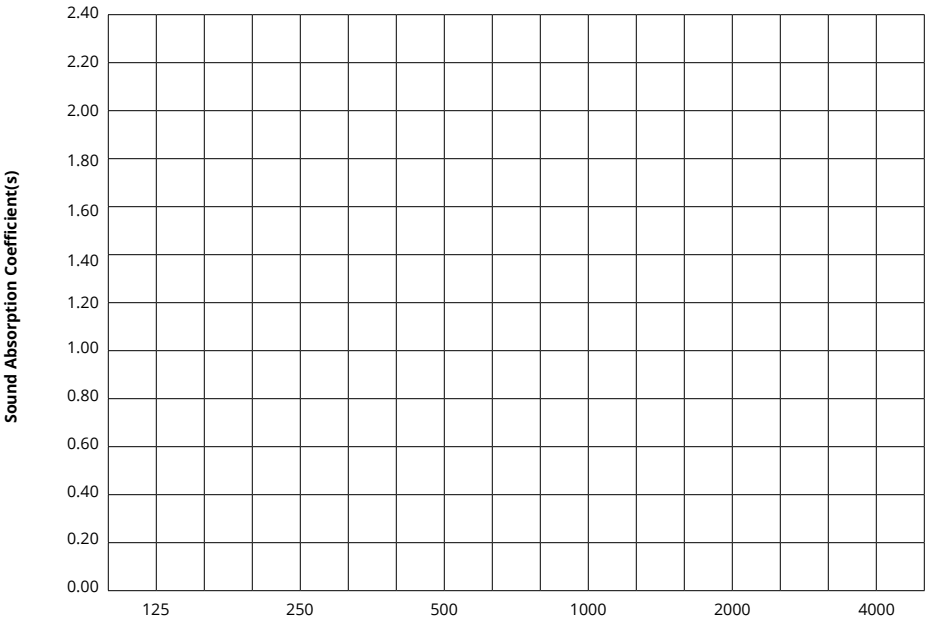

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	Pending product testing						

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

© 2026 Acoufelt. All rights reserved.