acoufelt



Blox, Deep

Ceiling Clouds

Premier Collection

Pacify problematic sound by beautifully boxing up the racket. With a deeper-set insert to add greater contrast and drama, Blox ceiling clouds offer a fresh take on noise reduction while inviting you to customize your space with Premier colors from subtle to bold shades, realistic WoodGrain patterns, or a combination inside and out. Blox allows total creativity to blend sizes, play with color, and add lighting as you like.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Weight	2400gsm
Standard Sizes	**Width:** 600, 1200mm W **Length:** 1200mm L **Height:** 500mm H



Blox, Deep Ceiling Cloud in Pearl and White

Technical

NRC Rating	Pending product testing
Fire Test	AS ISO 9705:2003 (according to AS 5637.1:2015 requirements) Group 1 0.93
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

** PET is recyclable through participating partners.*

© 2026 Acoufelt. All rights reserved.

Colorways

White
WH12


Milkyway
MI74


Ivory
IV11

Pearl
PE21


Valentine
VA70


Quartz
QU67


Stonewash
ST72


Sea Salt
SE57


Platinum
PL04


Almond
AL55


Pistachio
PI25


Turmeric
TU60


Flamingo
FL61


Amethyst
AM69


Periwinkle
PE23


Peacock
PE20


Metal
ME03


Mushroom
MU75


Celery
CE65


Wheat
WH68


Peach
PE19


Lilac
LI13


Marine
MA15


Sencha
SE58


Grey
GR02


Umber
UM54


Wasabi
WA29


Popcorn
PO26


Currant
CU59


Berry
BE06


Azure
AZ05


Oregano
OR18


Charcoal
CH01


Walnut
WA56



Eucalyptus
EU71


Carrot
CA08


Loganberry
LO77


Granite
GR62


Denim
DE09


Kale
KA12

Piano Black
PI24

Slate
SL27

Nori
NO76

Peppercorn
PE22

Shiraz
SH63

Flint
FL64

Midnight
MI16

For questions or additional product information,
visit **acoufelt.com.au or call 1800 626 462**

© 2026 Acoufelt. All rights reserved.


Sizes


Standard Width: 600 & 1200mmW

Standard Height: 500 mm H


Standard Length: 1200mm L


Plan

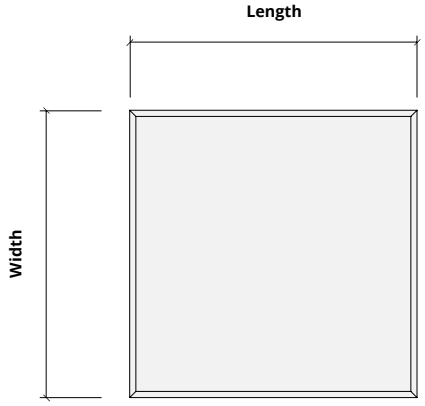

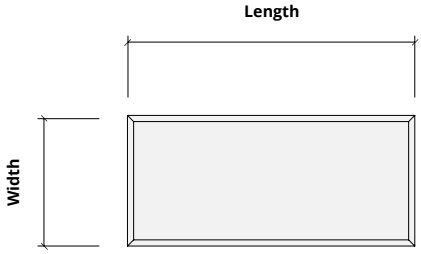



Elevations

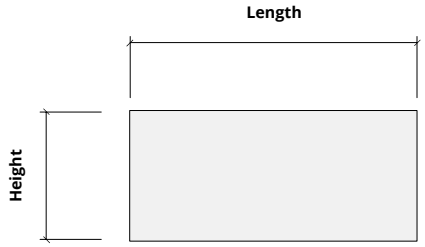

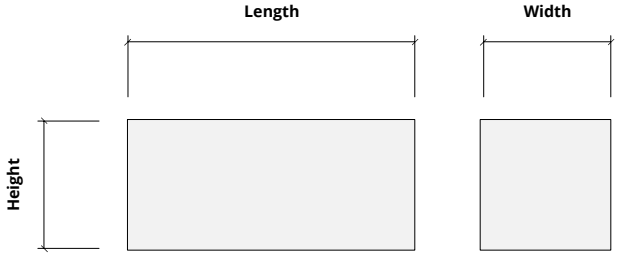

Perspective

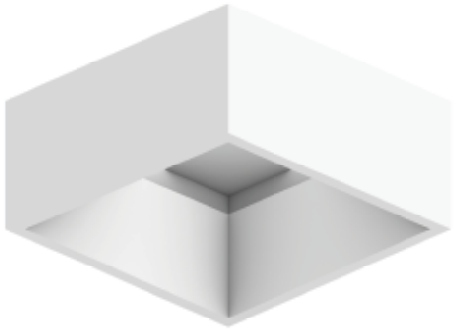


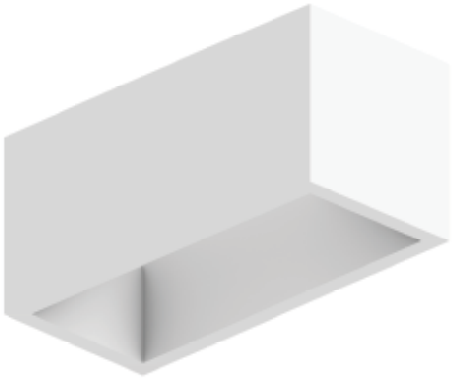


© 2026 Acoufelt. All rights reserved.

Hardware Spacing

1200mm W	1066mm on center spacing
1200mm L	610mm on center spacing
600mm W	470mm on center spacing

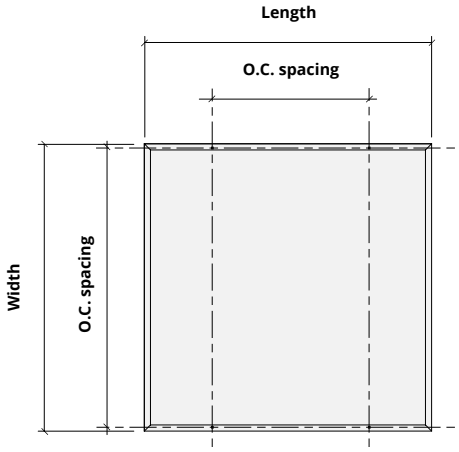

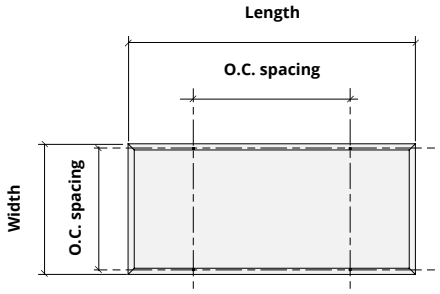

How to Specify

1. Choose Sizes | **2. Choose Colorways** | **3. Optional Lighting**

Blox sizes and shapes can be mixed to created desired design. See Blox, Angled and Shallow specificiation sheets for additional information.

---

1. Choose Sizes | **2. Choose Colorways** | **3. Optional Lighting**

Select one or multiple colorways to achieve the overall desired design.
See colorway choices on page 3.

---


1. Choose Sizes | **2. Choose Colorways** | **3. Optional Lighting**

Select lighting if desired. See enclosed lighting information sheets for additional information.


© 2026 Acoufelt. All rights reserved.

Mounting Methods


Cable

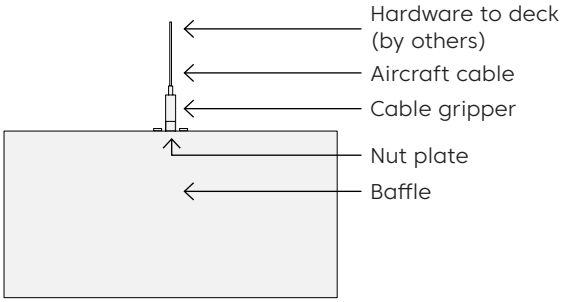

Cable to deck

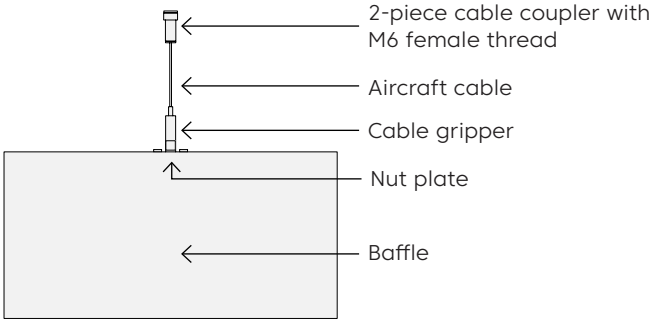


Threaded rod

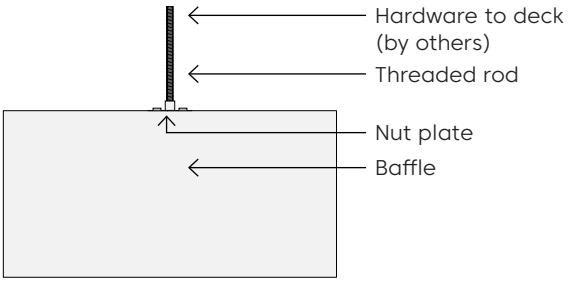

© 2026 Acoufelt. All rights reserved.

Acoustic Performance

Test Method	ASTM E795-16
Install Method	J-600
Rating Method	ASTM C423-17
Mounting Method	Pending Prduct Testing
Test Results	Pending product testing

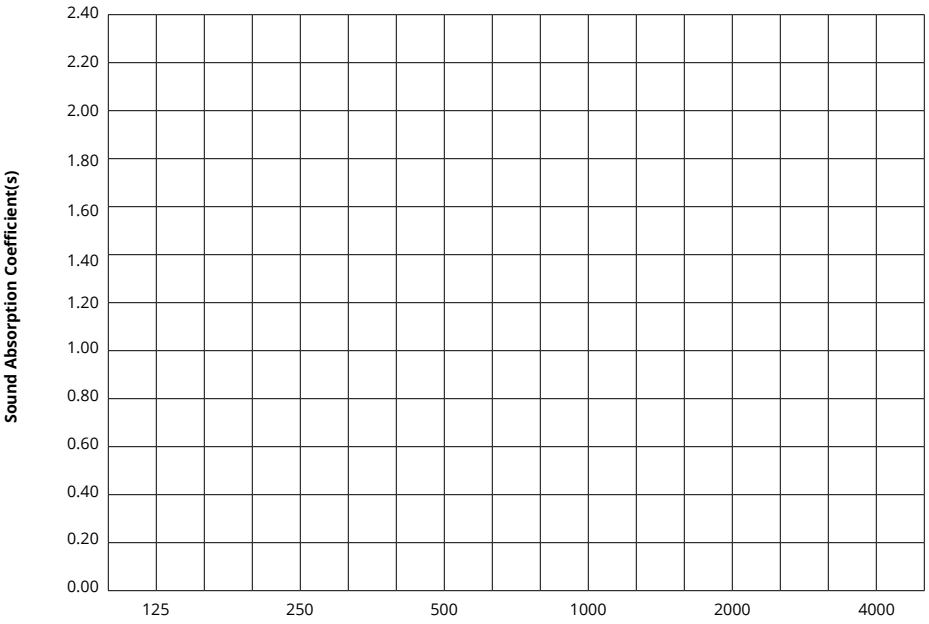

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	Pending product testing						

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

© 2026 Acoufelt. All rights reserved.