

## Blox, Shallow Ceiling Clouds

WoodGrain Collection

Pacify problematic sound by beautifully boxing up the racket. A shallow insert allows more visible color on an almost closed box. Blox ceiling clouds offer a fresh take on noise reduction, inviting you to customize your space with Premier colors from subtle to bold shades, realistic WoodGrain patterns, or a combination inside and out. Get creative by blending cloud sizes and adding lighting to create more visual interest.

## Specifications

<b>Surface</b>	Ceiling
<b>Material</b>	FilaSorb™ polyester felt
<b>Weight</b>	2400gsm
<b>Standard Sizes</b>	Width: 508, 1220mm W Length: 1220mm L Height: 508mm H



Blox, Shallow Ceiling Cloud in Baltic Birch

## Technical

<b>NRC Rating</b>	Pending product testing
<b>Fire Test</b>	AS ISO 9705:2033 (according to AS 5637.7:2015 requirements) Group 1 0.93
<b>Water Sorption</b>	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
<b>Colorfastness</b>	ISO 105-B02, 6-7

## Details

<b>Lead Time</b>	Refer to Product Lead Time Matrix
<b>Origin</b>	Australia
<b>Warranty</b>	Product: 20 years* Colorfastness: 20 years*

\* Conditions apply

## Environmental

<b>Recycled Content</b>	Minimum 60%
<b>Energy</b>	Generated using 40% solar energy
<b>Indoor Air Quality</b>	VOC less than/equal to 0.5mg/m3
<b>Recyclable</b>	100%*
<b>Certifications</b>	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

\* PET is recyclable through participating partners.



For questions or additional product information,  
visit [acoufelt.com.au](https://acoufelt.com.au) or call 1800 626 462

Blox, Shallow Ceiling Clouds | April 2026

# Colorways

## WOODGRAIN



Picket Fence  
WQ01



Loft  
WQ06



White Elm  
WQ07



Lyed Larch  
WQ30



White Oak  
WQ13



Baltic Birch  
WQ12




Knotty Spruce  
WQ29




French Bobbin  
WQ08




Boat Shed  
WQ02



Nordic Plank  
WQ15




Boardwalk  
WQ10




Mocha Legno  
WQ25



Mountain Lodge  
WQ24




Wine Barrel  
WQ03



Log Cabin  
WQ04



Natural Oak  
WQ16



Woodland Fog  
WQ22




Driftwood  
WQ21



Weathered Slate  
WQ14




Petrified Ash  
WQ23




Antique Chest  
WQ11



European Larch  
WQ17



Fumed Oak  
WQ19




Teak  
WQ18



Charred Larch  
WQ09



Shadow Oak  
WQ28



Barn Door  
WQ05



Black Walnut  
WQ20



Scorched Timber  
WQ26



Espresso Oak  
WQ27



For questions or additional product information,  
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Blox, Shallow Ceiling Clouds | April 2026



# Sizes

**Standard Width:** 508, 1220mm W



**Standard Height:** 508mm H

**Standard Length:** 1220mm L



## Plan

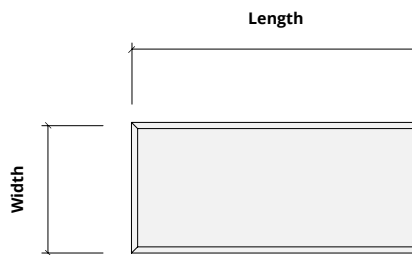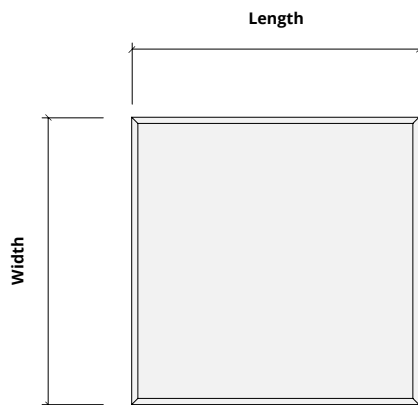

## Elevations

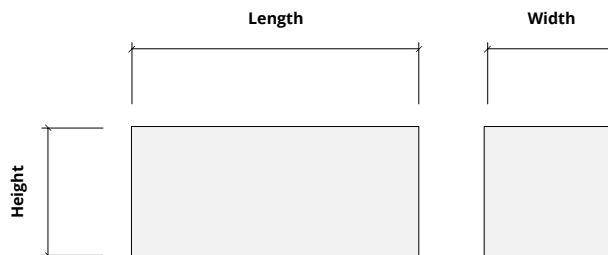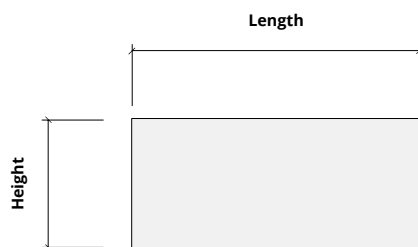


## Perspective

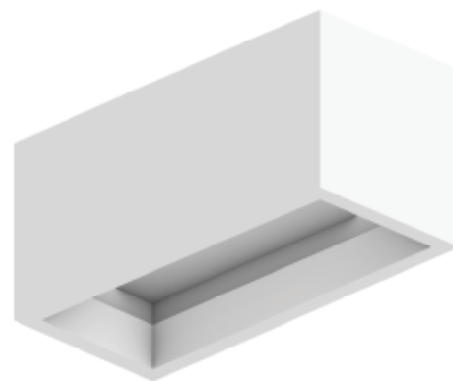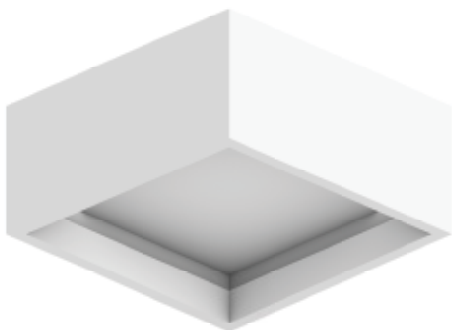


# Mounting Methods


## Cable

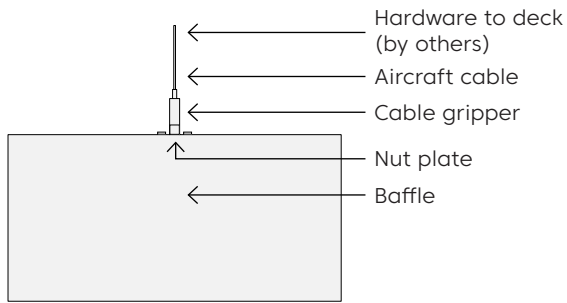

## Cable to deck


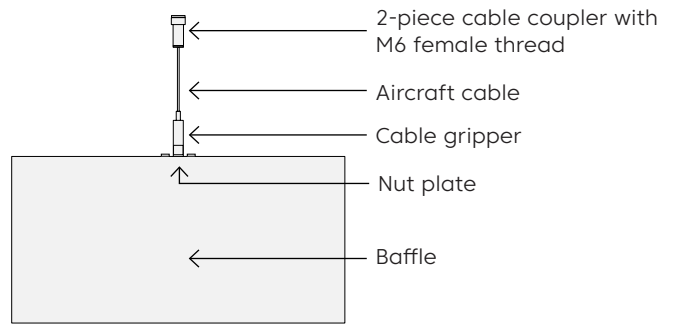


## Threaded rod

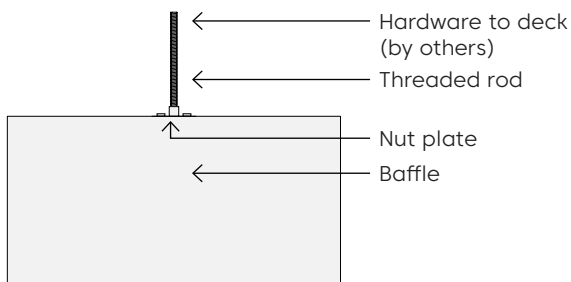

# Hardware Spacing

1220mm W	1066mm on centre spacing
1220mm L	610mm on centre spacing
508mm	470mm on centre spacing

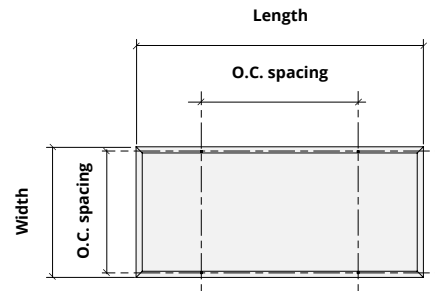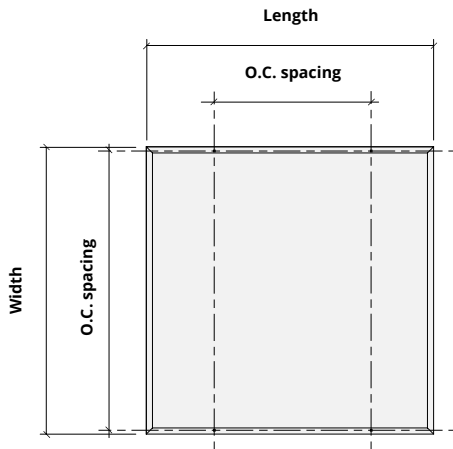

## How to Specify

1. Choose Sizes

2. Choose Colorways

3. Optional Lighting

Blox sizes and shapes can be mixed to create desired design. See Blox, Angled and Deep specification sheets for additional information.

1. Choose Sizes

2. Choose Colorways

3. Optional Lighting

Select one or multiple colorways to achieve the overall desired design. See colorway choices on page 3.

1. Choose Sizes


2. Choose Colorways

3. Optional Lighting

Select lighting if desired. See enclosed lighting information sheets for additional information.

# Acoustic Performance

<b>Test Method</b>	ASTM E795-16
<b>Install Method</b>	J-600
<b>Rating Method</b>	ASTM C423-17
<b>Mounting Method</b>	Pending product testing
<b>Test Results</b>	Pending product testing

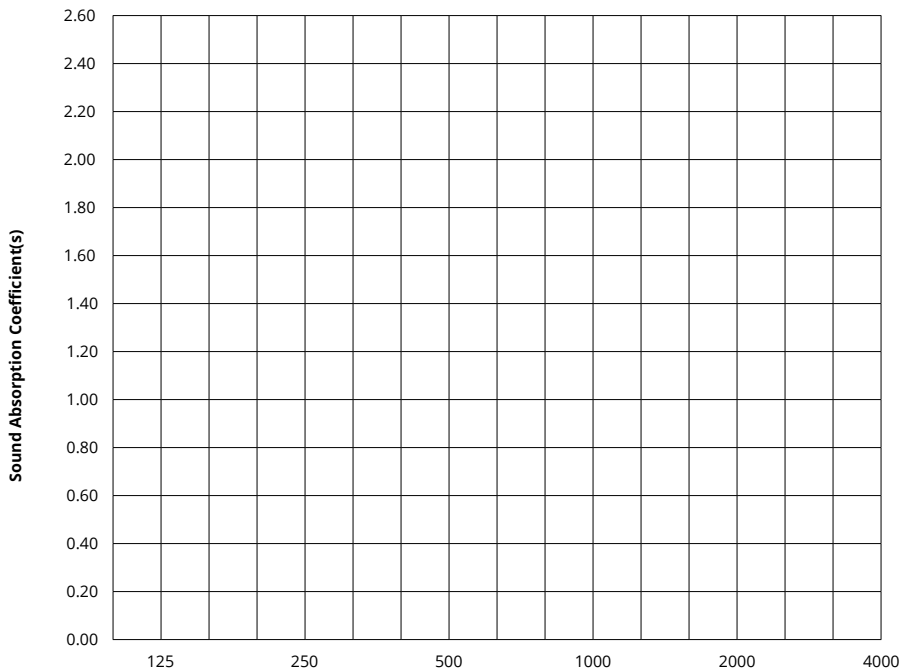


Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
3" Truss Baffle	Pending product testing						

## What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

*Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.*

 For questions or additional product information, visit [acoufelt.com.au](http://acoufelt.com.au) or call **1800 626 462**

**Blox, Shallow Ceiling Clouds** | April 2026