

Full Colour Ceiling Clouds

### 12mm Product Detail

**Application** Ceiling

Composition 100% polyester

FilaSorb™ Material **Recycled content** 60% min 2400gsm Weight 12mm +/- 10% **Thickness** 

Circle - 1200 x 1200mm **Dimensions** 

Hexagon - 1200 x 1385mm

Rectangle - 1200 x 1400mm

Circle – 2 Qty per carton

> Hexagon - 2 Rectangle - 1

## Sustainability



Made from 60% min. recycled content



Declare Red List Free (3<sup>rd</sup> Party Verified)



Generated using 40% solar energy



Recyclable at end of lifespan



Total VOC's less than  $0.5 \text{ mg/m}^3$ (3<sup>rd</sup> Party Verified)











### 12mm Technical Data

Fire test method EN 13501-1: 2019 Classification B-s1, d0

Water vapour sorption method ASTM C1104-2019 (Procedure A

Modified)

Water sorbed by weight 0.20% (results based on a

12mm thick panel)

Total VOC test method SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard

Method v.1.2-2017

**Total VOC result**  $\leq 0.5 \text{mg/m}^3$ 

Colourfastness test method ISO 105-B02

6-7 Rating

### Guarantees

**Lead Time** 4-6 weeks Origin United Kingdom

Warranty against defects

Colourfastness warranty

20 years\*

20 years\*

\*conditions apply

### 12mm Acoustic Performance

#### Test method

ASTM E795-16: Standard Practices for Mounting Test Specimens **During Sound Absorption Tests** 

#### Installation method

Method E

E-200 200mm air gap, E-400 400mm air gap


Rating method

ISO 11654-1997: Acoustic – sound absorbers for use in buildings – rating of sound absorption

#### Test results


Method E

NRC 0.85 200mm air gap | aw 0.90 200mm air gap, Class A NRC 0.80 400mm air gap | aw 0.80 (H) 400mm air gap, Class B

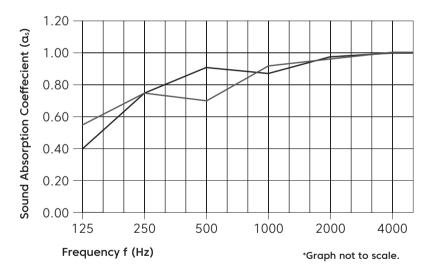

Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
a <sub>s</sub> 200mm air gap	0.40	0.75	0.90	0.85	0.95	1.00	0.85	Class A
a <sub>s</sub> 400mm air gap	0.55	0.75	0.70	0.90	0.95	1.00	0.80	Class B

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the



### 24mm Product Detail

**Application** Ceiling

Composition 100% polyester

Material FilaSorb™ **Recycled content** 60% min 4800gsm Weight **Thickness** 24mm +/- 10%

**Dimensions** Circle - 1200 x 1200mm

Hexagon - 1200 x 1385mm

Rectangle - 1200 x 1400mm

Total VOC's less

than 0.5 mg/m<sup>3</sup>

Recyclable at

end of lifespan

Circle – 2 Qty per carton

> Hexagon - 2 Rectangle - 1

## Sustainability



Made from 60% min. recycled content









### 24mm Technical Data

Fire test method Result pending Total VOC test method SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017 **Total VOC result**  $\leq 0.5 \text{mg/m}^3$ Colourfastness test method ISO 105-B02 6-7 Rating

### Guarantees

**Lead Time** 4-6 weeks Origin United Kingdom Warranty against defects 20 years\* Colourfastness warranty 20 years\* \*conditions apply

### 24mm Acoustic Performance

#### Test method

ASTM E795-16: Standard Practices for Mounting Test Specimens During Sound Absorption Tests

#### Installation method

A, tested with no air gap


#### Rating method

ISO 11654-1997

Acoustic – sound absorbers for use in buildings - rating of sound absorption

#### Test results

NRC 0.60 no air gap | 0.50 (LH) aw no air gap, Class D

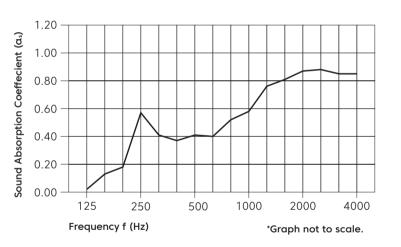


Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
۵s	0.02	0.57	0.41	0.58	0.87	0.85	0.60	Class D

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results.



# Designs

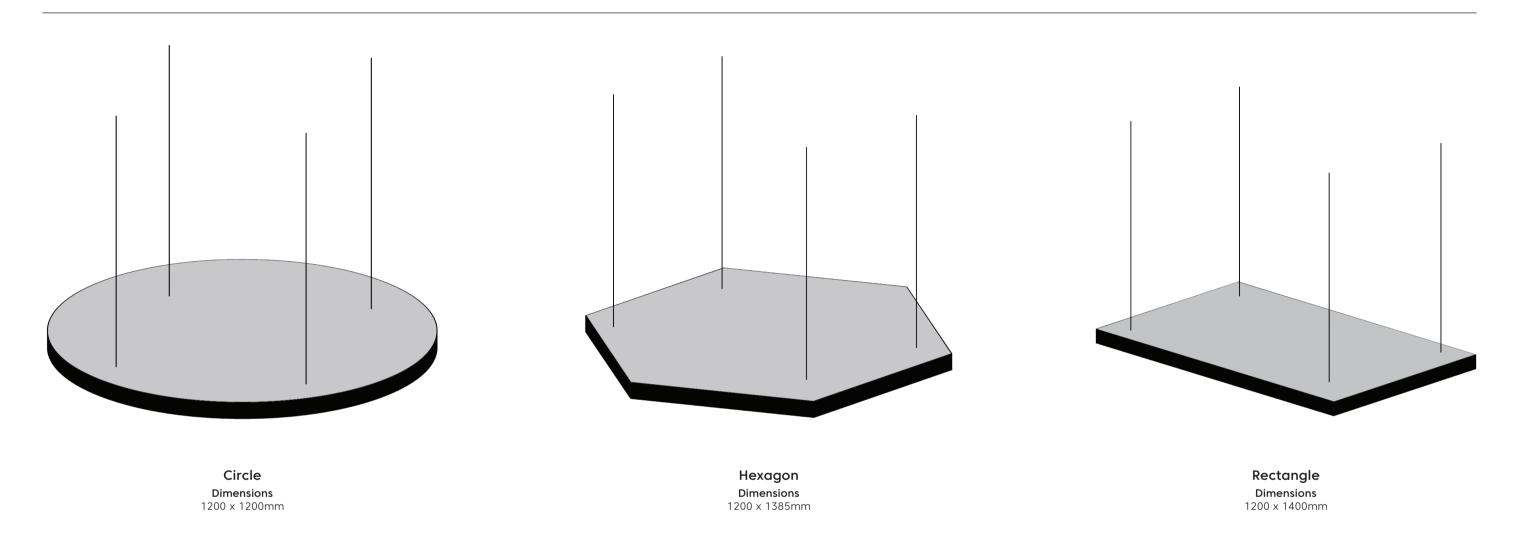



## FilaSorb™ Colourways



#### Can't find a colour?

We are constantly updating our palette, which includes adding and discontinuing certain colour lines. If you can't find the colour you are looking for, please contact us with your colour request, as we may still have stock available.



# Mounting Methods

