

Crest

Ceiling Clouds

WoodGrain Collection

With beautifully shaped, sound-absorbing felt, Crest ceiling clouds allow you to design an interesting ceiling scape while dampening distracting noise from busy spaces. Reminiscent of the crest of a wave, multiple Crest clouds in various sizes, hung together in the same space, creates a relaxing sense of movement. Combine and hang Crest clouds in an array of colors and sizes to manufacture a compelling sculptural installation or opt for quiet uniformity by choosing a single size and color.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Thickness	12mm (±10%)
Weight	2400gsm
Standard Sizes	100mm T x 600mm W x 300mm H 100mm T x 900mm W x 450mm H 100mm T x 1200mm W x 600mm H Lengths: 600mm, 1200mm L



Crest Ceiling Cloud in Petrified Ash

Technical

NRC Rating	Pending Product Testing
Fire Test	Pending Product Testing
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental


Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

** PET is recyclable through participating partners.*


© 2026 Acoufelt. All rights reserved.

Mounting Methods


Cable

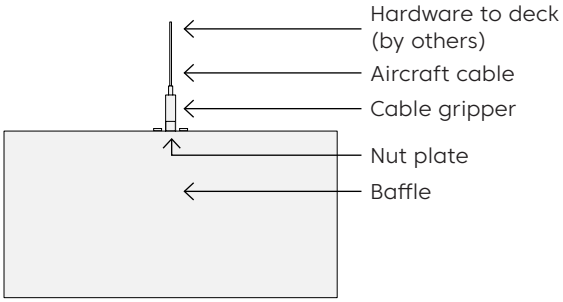

Cable to deck

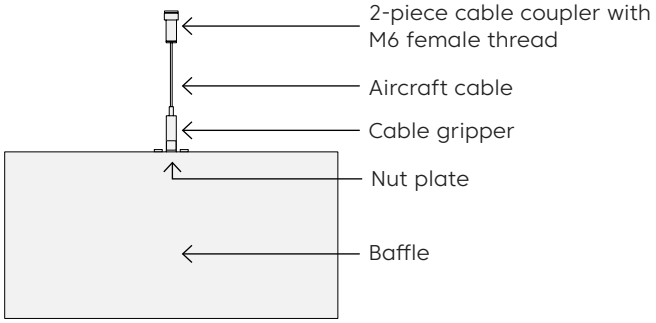

Threaded rod

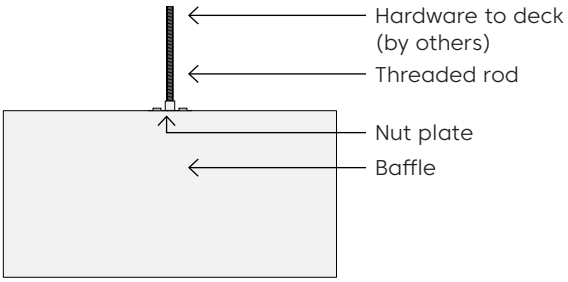



© 2026 Acoufelt. All rights reserved.


Sizes

Standard Sizes	100mm T x 600mm W x 300mm H 100mm T x 900mm W x 450mm H 100mm T x 1200mm W x 600mm H Lengths: 600mm, 1200mm L
Thickness	12mm (±10%)


Front Elevation

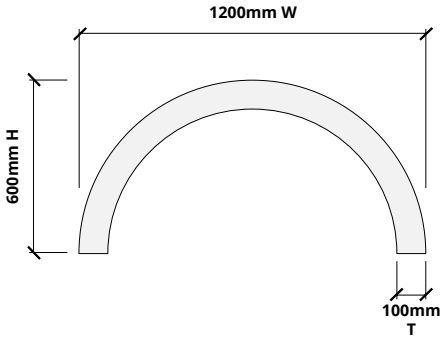


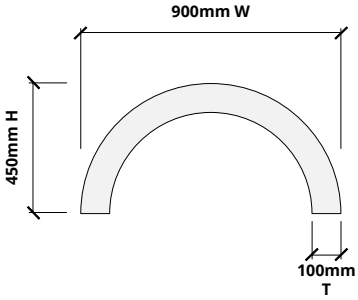






Side Elevation

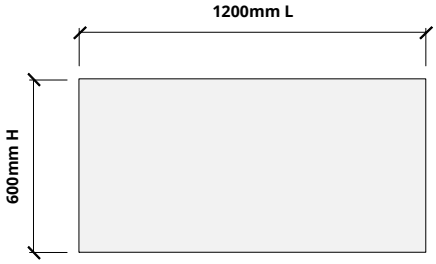




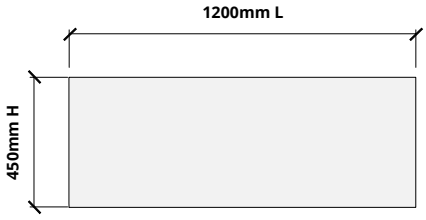



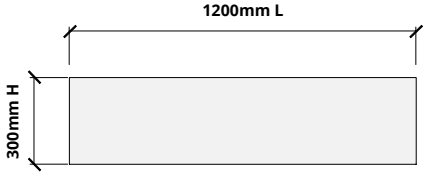




© 2026 Acoufelt. All rights reserved.

Hardware Spacing

600mm W, L	300mm on center spacing
900mm W	450mm on center spacing
1200mm W, L	600mm on center spacing

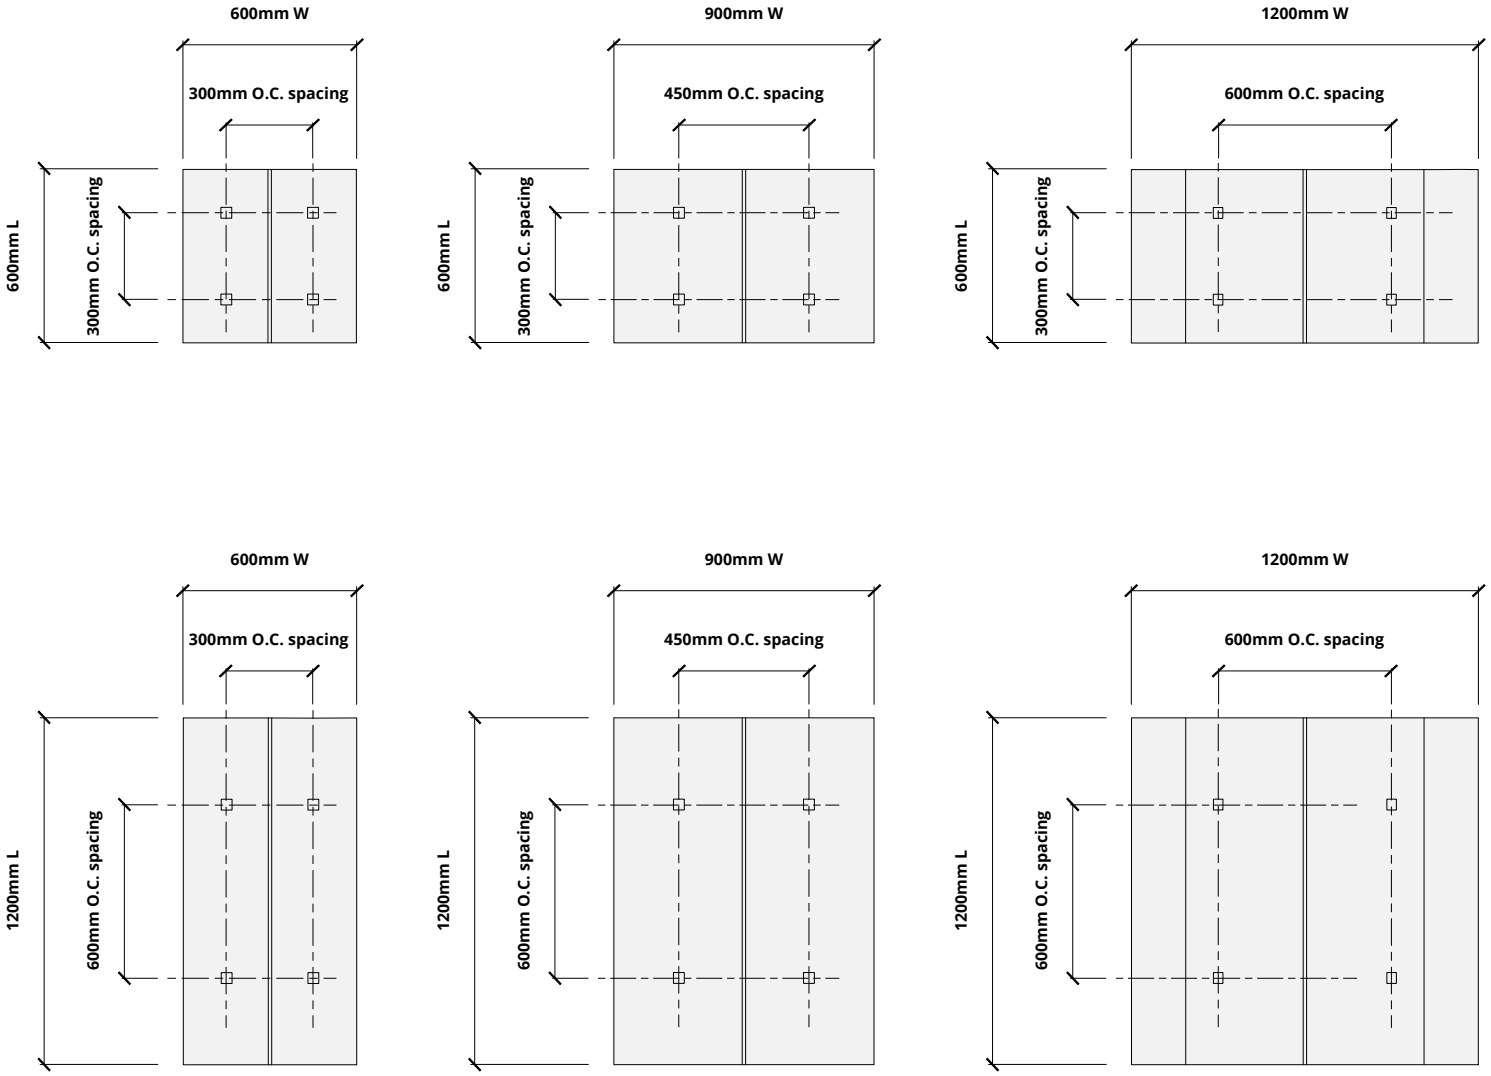


© 2026 Acoufelt. All rights reserved.

© 2026 Acoufelt. All rights reserved.

Acoustic Performance

Test Method	ISO 11654-2002
Install Method	E200, E400
Rating Method	ASTM C423-09a
Test Results	Pending product testing

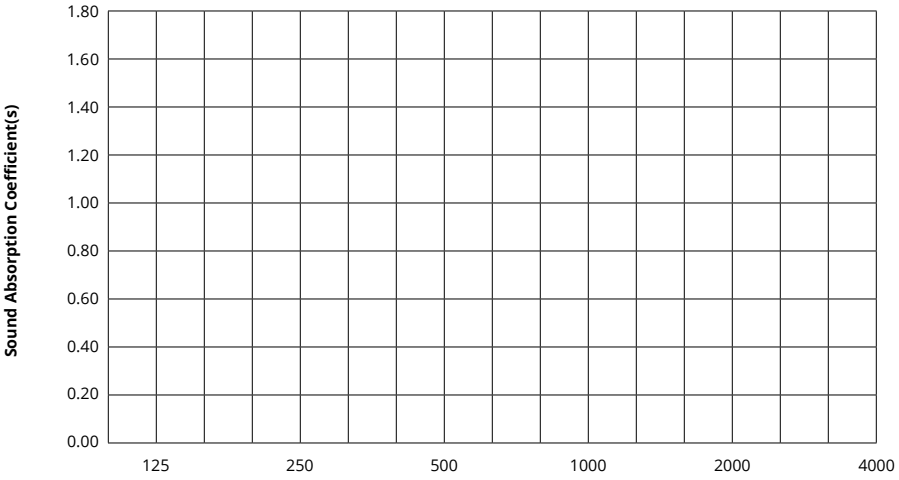

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	Pending product testing						

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

For questions or additional product information,
visit **acoufelt.com.au or call 1800 626 462**

© 2026 Acoufelt. All rights reserved.