



Elevate

BarrierBack™ Carpet Tiles

acoufelt
making quiet

Product Detail


Application	Floor
Composition	BarrierBack™
Material	100% solution dyed nylon
Style	Tufted loop pile
Recycled content	100% recycled nylon in face pile
Tile dimensions	500 x 500mm
Thickness	7mm +/- 10%
Tiles per box	20

Guarantees

Wear warranty	20 years*
Castor chair proof	20 years*
Anti-static	Lifetime*
Colorfast	20 years*
Classification	Commercial Extra Heavy Duty

*conditions apply

Installation Method

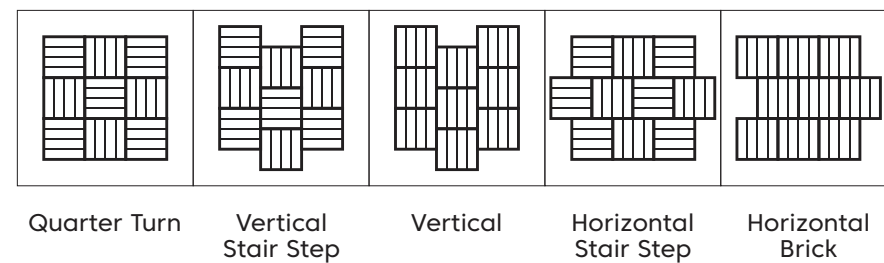

Technical Data

Dimensional stability	ISO 17984, -0.05%
Electrostatic propensity	AATCC 134, < 0.70kW
Color fastness	ISO 105-B02, 6-7
Fire test method	AS/ISO 9239.1-2003
Critical heat flux	Mean result 7.5kW/m ²
Smoke deviation rate	Mean result 239%.min


Sustainability

-  Yarn made from 100% recycled nylon fiber
-  Phenol & formaldehyde free



Acoustic Performance

Test method	EN ISO 11654
Results	NRC 0.15

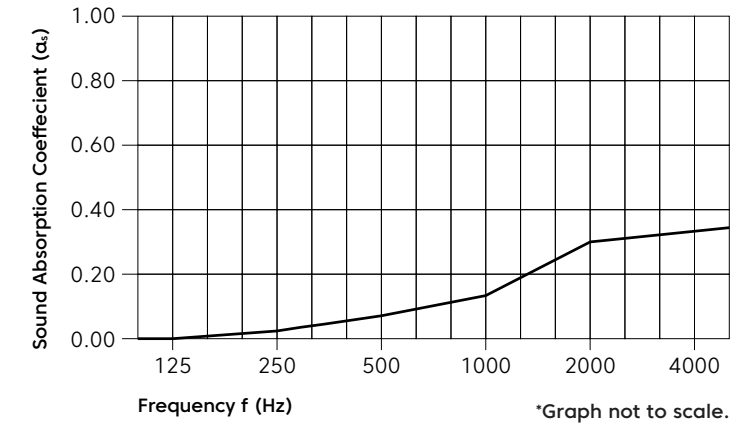

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
α _s	0.00	0.03	0.07	0.16	0.30	0.36	0.15


QuickShip

QuickShip Rapid



QuickShip Rapid products can be despatched within **1-2 days.**

Colorways

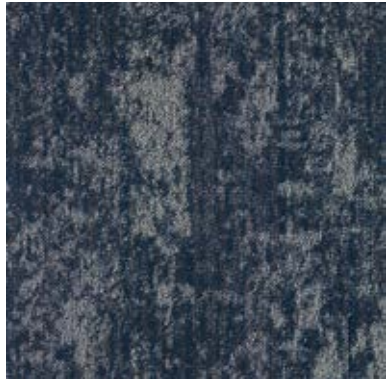

Ocean Foam



Hinterland



Summit



Plateau