



Flow

BarrierBack™ Carpet Tiles

acoufelt
making quiet






Product Detail

Application	Floor
Composition	BarrierBack™
Material	100% solution dyed nylon
Style	Tufted loop pile
Recycled content	100% recycled nylon in face pile
Tile dimensions	500 x 500mm
Thickness	7mm +/- 10%
Tiles per box	20

Guarantees

Wear warranty	20 years*
Castor chair proof	20 years*
Anti-static	Lifetime*
Colorfast	20 years*
Classification	Commercial Extra Heavy Duty
*conditions apply	


Installation Method

				
Quarter Turn	Vertical Stair Step	Vertical	Horizontal Stair Step	Horizontal Brick

Technical Data

Dimensional stability	ISO 17984, -0.05%
Electrostatic propensity	AATCC 134, < 0.70kW
Color fastness	ISO 105-B02, 6-7
Fire test method	AS/ISO 9239.1-2003
Critical heat flux	Mean result 7.5kW/m²
Smoke deviation rate	Mean result 239%.min

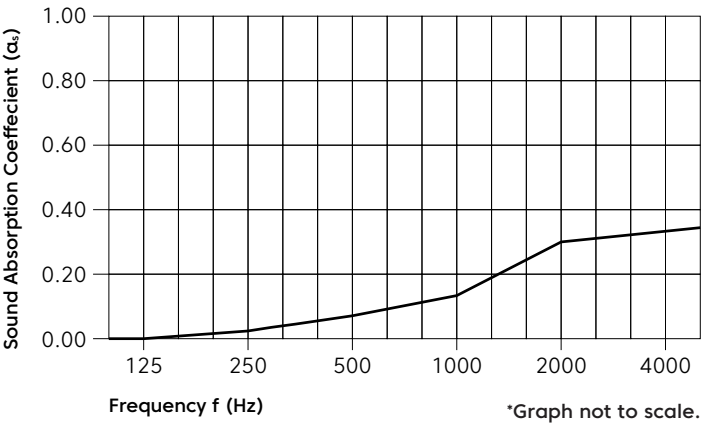
Sustainability

-  Yarn made from 100% recycled nylon fiber
-  Phenol & formaldehyde free



Acoustic Performance

Test method	EN ISO 11654
Results	NRC 0.15



Frequency (Hz)	125	250	500	1000	2000	4000	NRC
αs	0.00	0.03	0.07	0.16	0.30	0.36	0.15

QuickShip

QuickShip Rapid



QuickShip Rapid products can be despatched within 1-2 days.

Colorways



Stream



Drift



Rapid



Current