



Interlace, Tetra Ceiling Clouds

Premier Collection

Interlace, Tetra Ceiling Clouds deliver a targeted defense against sound seeping into areas designated for quiet work, meetings, and collaboration. Interlocking baffles absorb sound on multiple surfaces and can be suspended in tight clusters or spaced apart for an airier aesthetic and expanded coverage area.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Weight	2400gsm
Standard Heights	Width: 1177, 1664, 2261mm W Length: 1219, 1829, 2438mm L Height A: 102mmH Height B: 305, 256, 406mm H



Interlace, Tetra Ceiling Clouds in Ivory

Technical

NRC Rating	0.85, 200mm air gap* 0.80, 400mm air gap*
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Test results available upon request

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental





























Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Interlace, Tetra Ceiling Clouds | June 2026

							
White WH12	Milkyway MI74	Ivory IV11	Pearl PE21	Valentine VA70	Quartz QU67	Stonewash ST72	Sea Salt SE57
							
Platinum PL04	Almond AL55	Pistachio PI25	Turmeric TU60	Flamingo FL61	Amethyst AM69	Periwinkle PE23	Peacock PE20
							
Metal ME03	Mushroom MU75	Celery CE65	Wheat WH68	Peach PE19	Lilac LI13	Marine MA15	Senchia SE58
							
Grey GR02	Umber UM54	Wasabi WA29	Popcorn PO26	Currant CU59	Berry BE06	Azure AZ05	Oregano OR18
							
Charcoal CH01	Walnut WA56	Eucalyptus EU71	Carrot CA08	Loganberry LO77	Granite GR62	Denim DE09	Kale KA12
							
Piano Black PI24	Slate SL27	Nori NO76	Peppercorn PE22	Shiraz SH63	Flint FL64	Midnight MI16	



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462


Interlace, Tetra Ceiling Clouds | June 2026

Sizes


Standard Heights Width: 1177, 1664, 2261mm W
 Length: 1219, 1829, 2438mm L
 Height A: 102mm H
 Height B: 305, 356, 406mm H

Height A	Height B
102mm	305mm
102mm	356mm
102mm	406mm

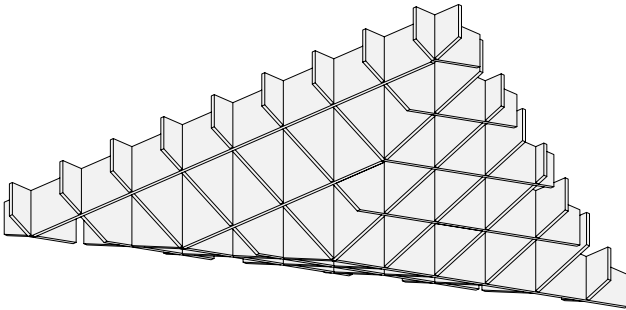
Perspective



Plan

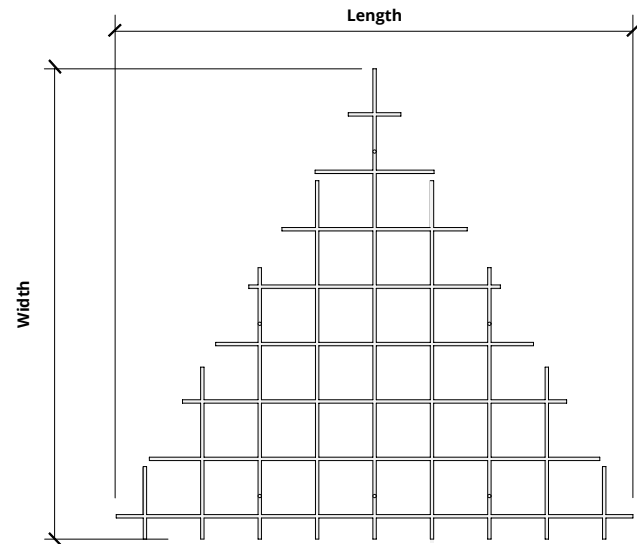

Elevation



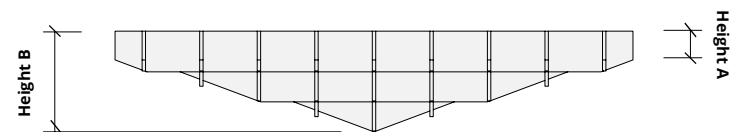


For questions or additional product information,
 visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Interlace, Tetra Ceiling Clouds | June 2026

Hardware Spacing

1177mm W	457mm spacing
1664mm W	(2) at 533mm spacing
2261mm W	(2) at 1067mm spacing
1219mm L	406mm spacing
1829mm L	(2) at 406mm spacing
2438mm L	(2) at 610mm spacing

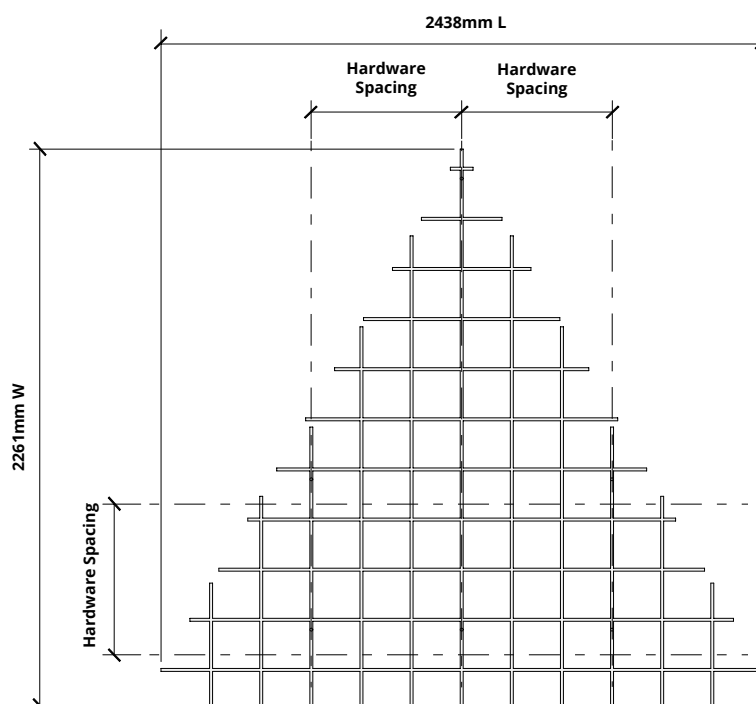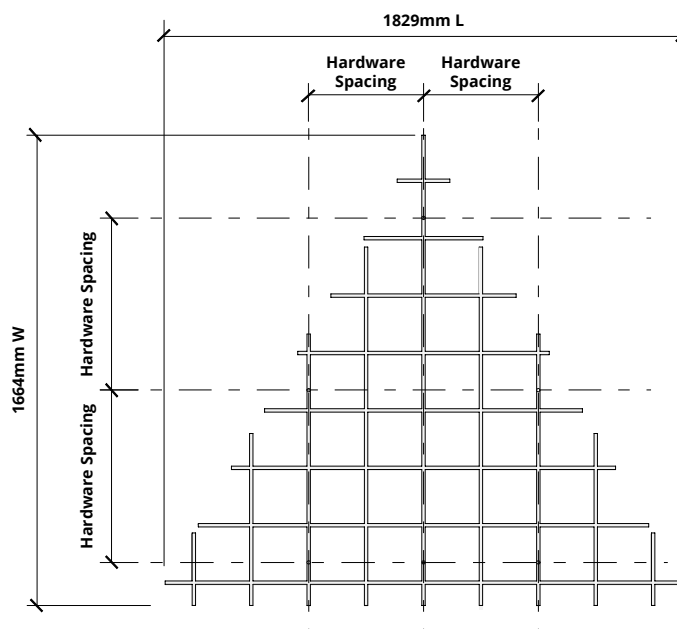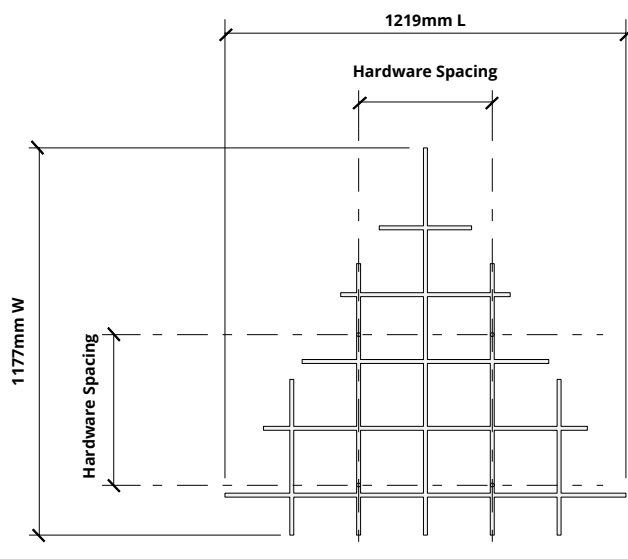


For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Interlace, Tetra Ceiling Clouds | June 2026


Layout Examples

Layout 1

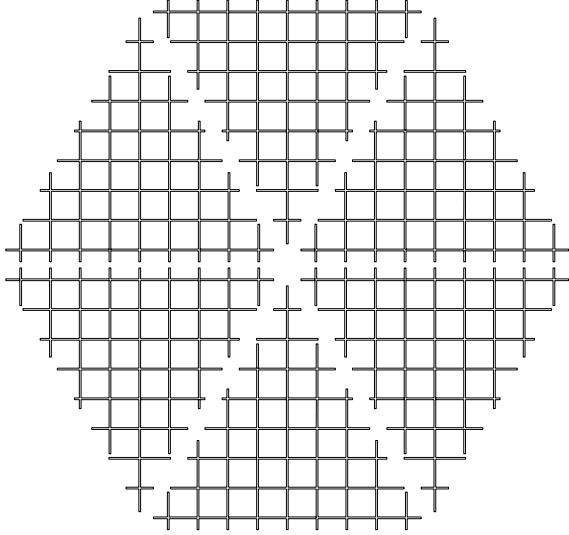
Plan



Elevation

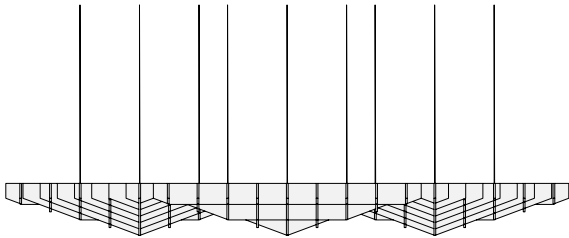


Perspective

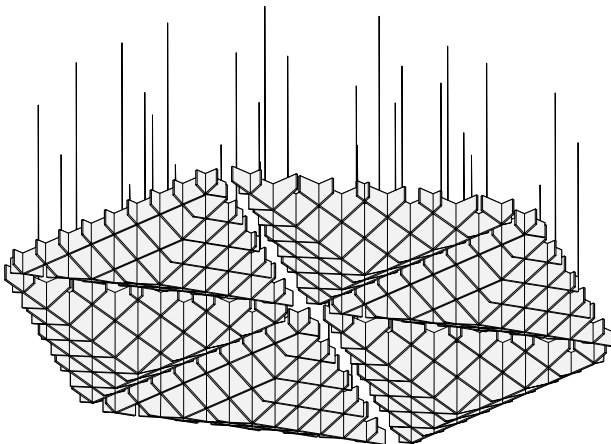


Layout 2

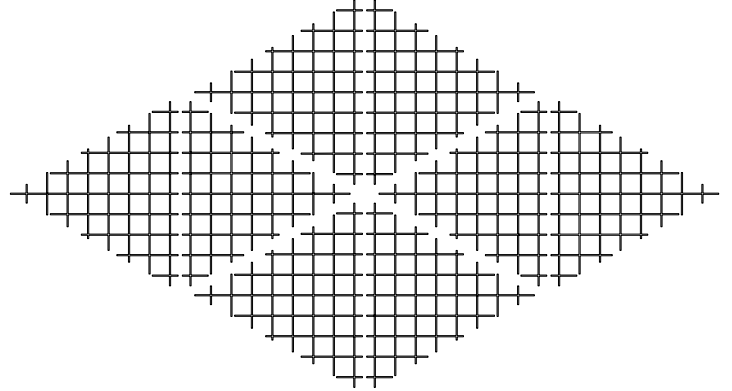
Plan



Elevation

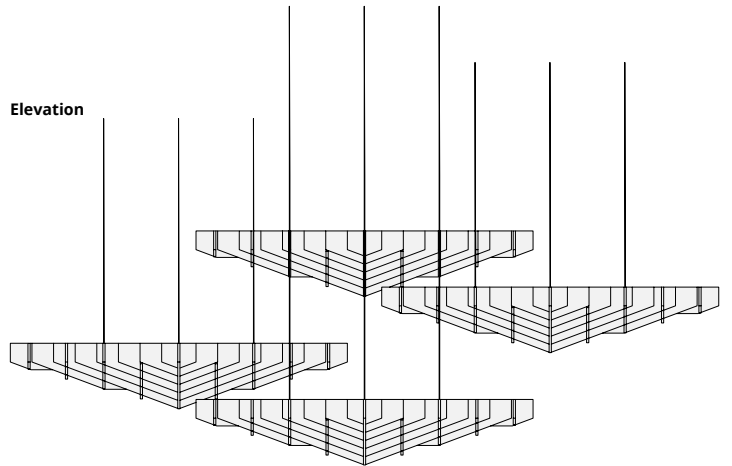

Perspective

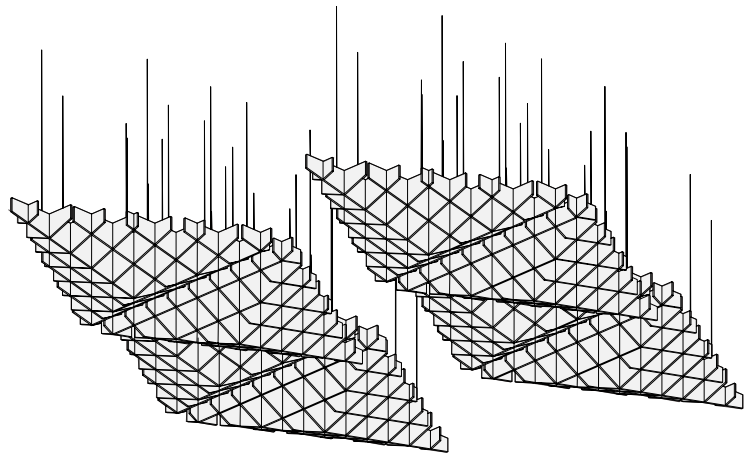


For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462


Interlace, Tetra Ceiling Clouds | June 2026

Mounting Methods

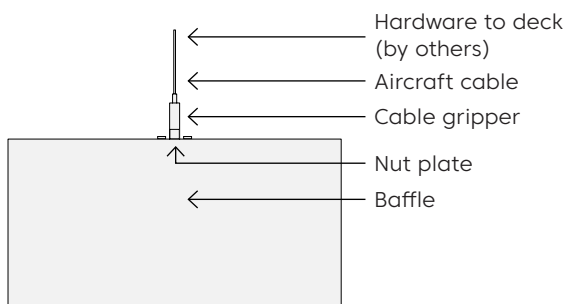
Cable



Cable to deck

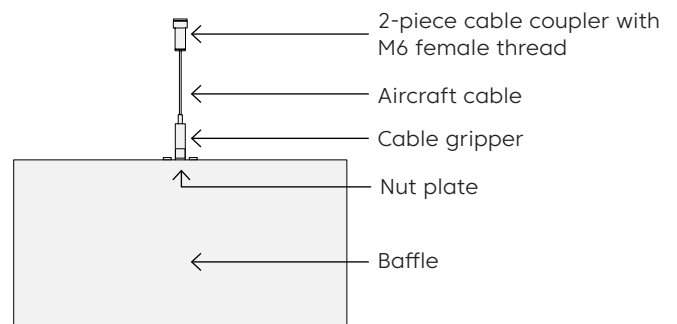


Threaded rod

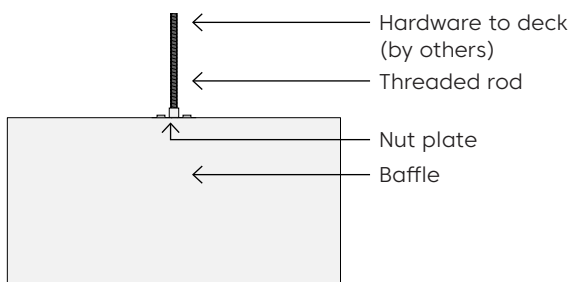

Acoustic Performance

Test Method	ISO 11654-2002
Install Method	E200, E400
Rating Method	ASTM C423-09a
Test Results	NRC 0.85, 200mm air gap SAA 0.86, 200mm air gap NRC 0.80, 400mm air gap SAA 0.83, 400mm air gap

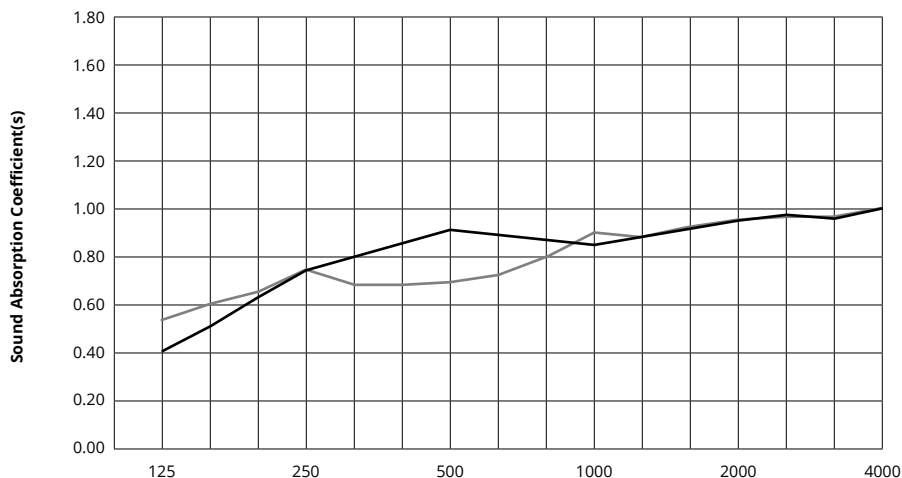

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm, 200mm air gap	0.40	0.75	0.90	0.85	0.95	1.00	0.85
12mm, 400mm air gap	0.55	0.75	0.70	0.90	0.95	1.00	0.80

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one-third octave bands at 125, 250, 500, 1000, 2000, and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the 12 one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com.au or call 1800 626 462

Interlace, Tetra Ceiling Clouds | June 2026