


acouflor
making quiet

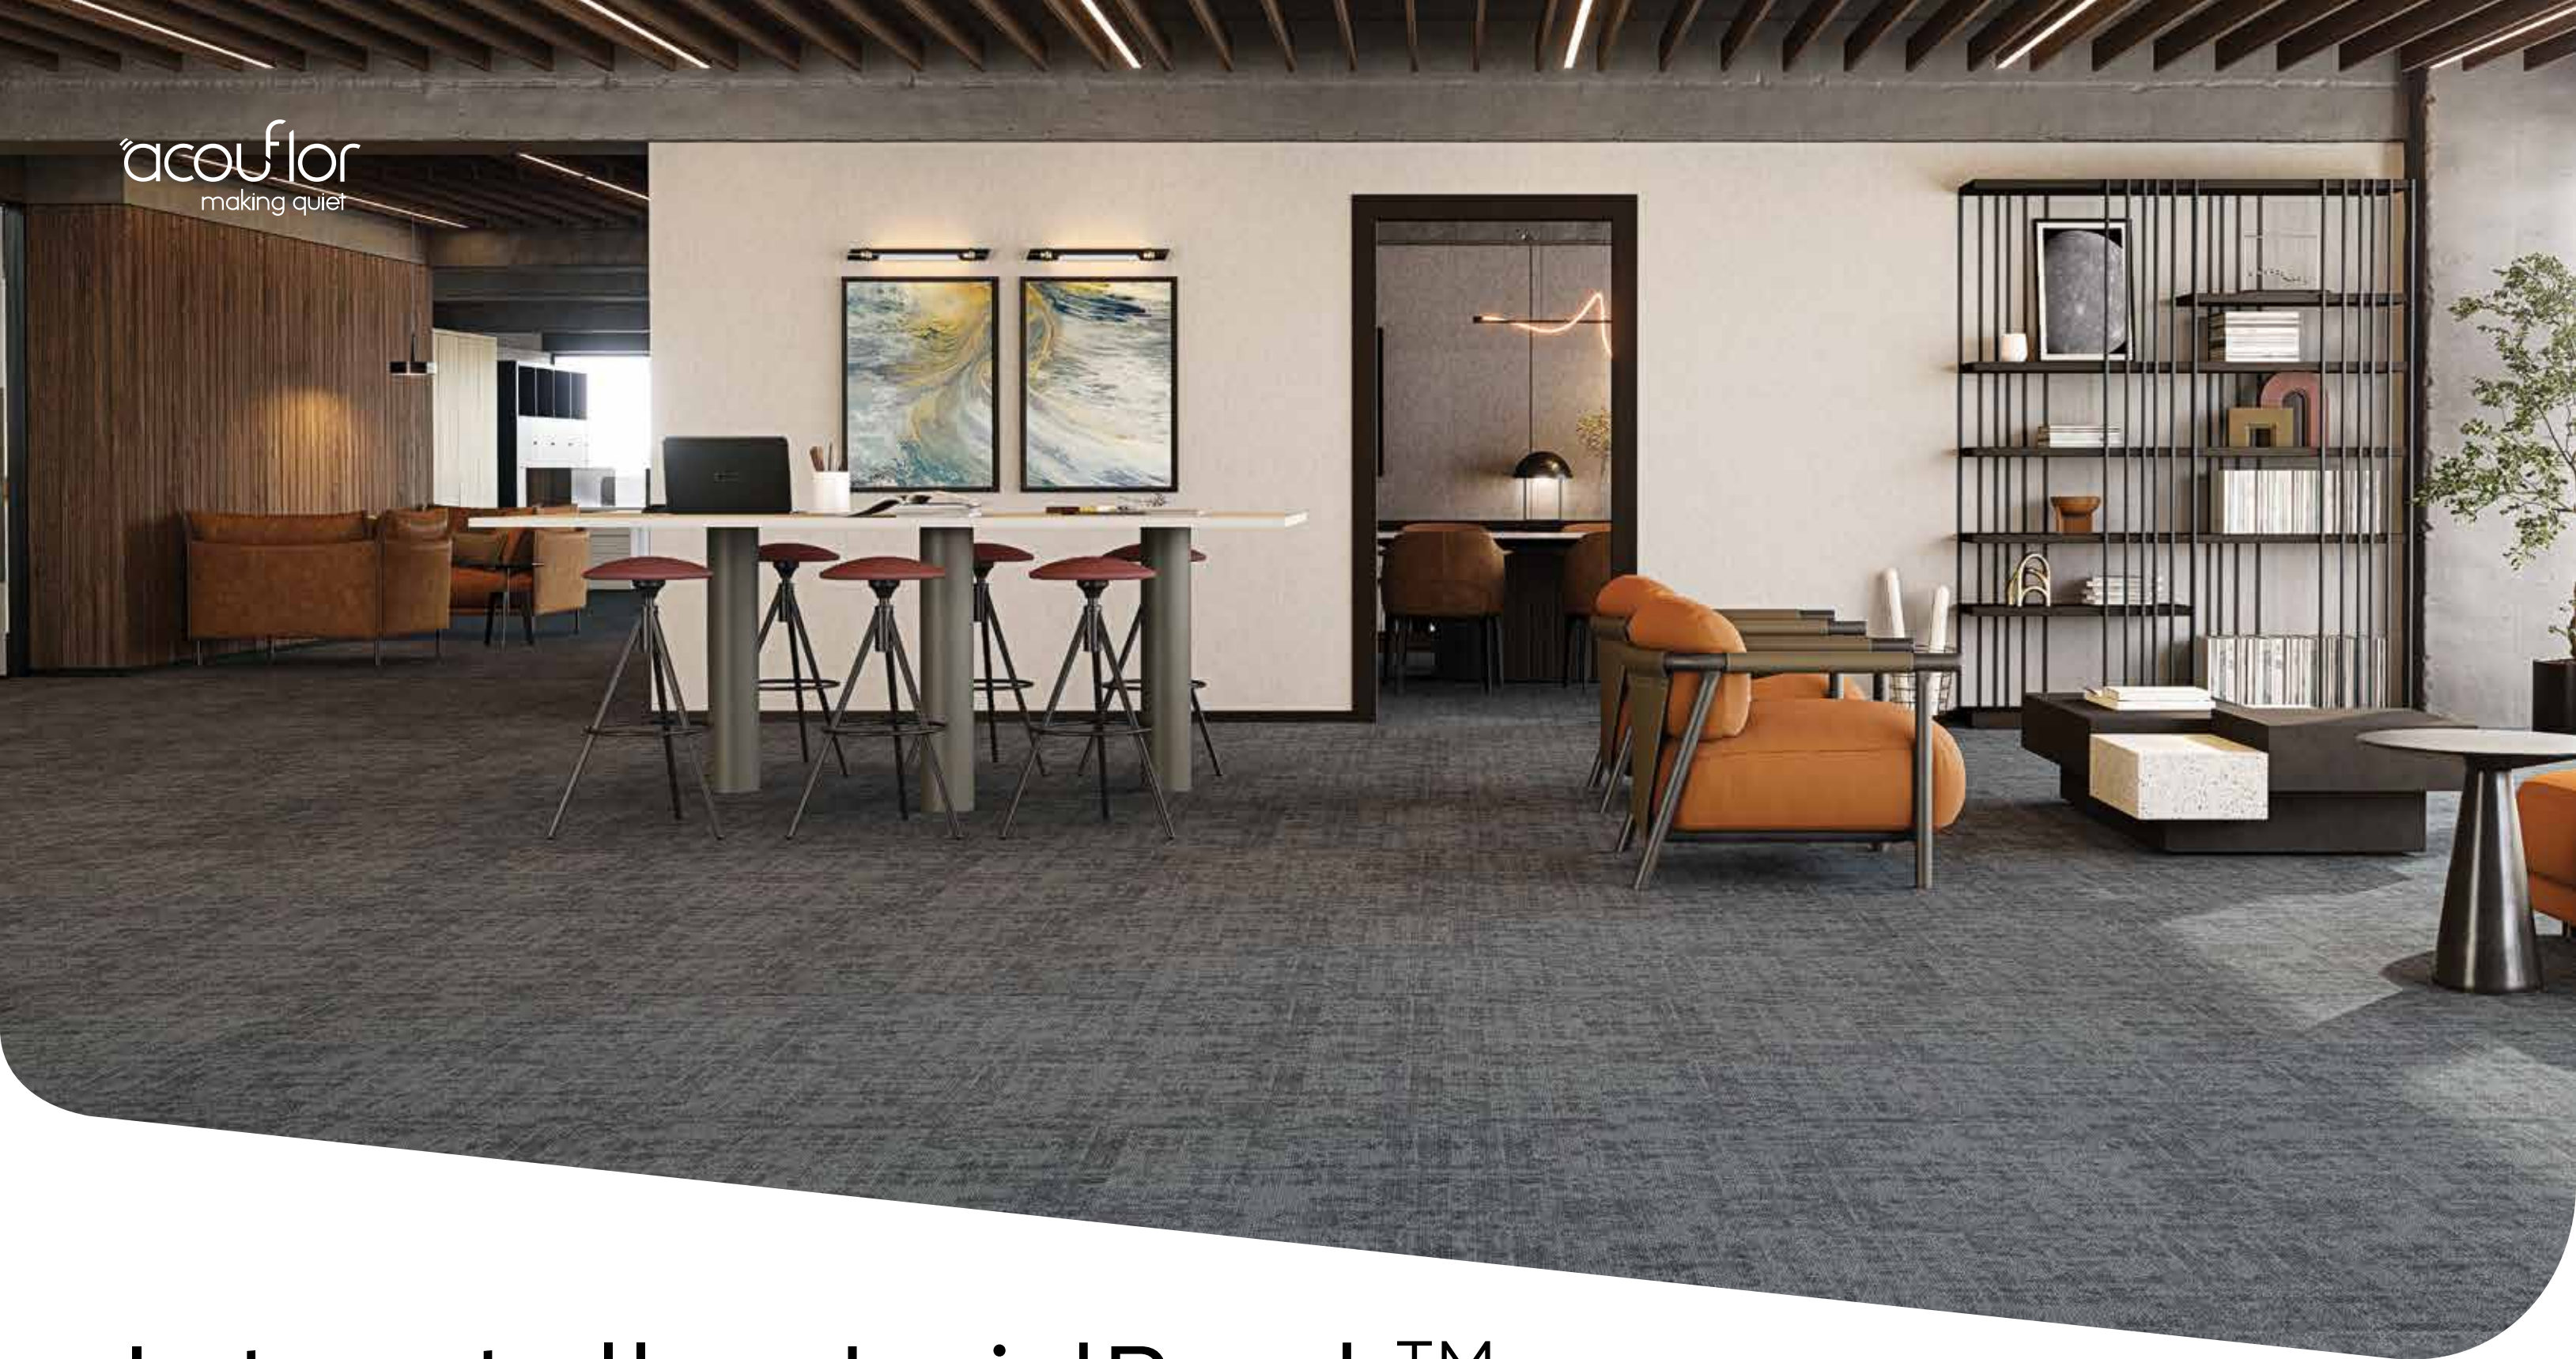

Interstellar LaidBack™ Carpet Tiles

Specifications

Application	Floor
Backing	Felt polyester + fibreglass
Pile material	Solution dyed nylon
Style	Multi-level textured loop pile
Recycled content	Backing made from >85% recycled PET
Dimensions	500 x 1000mm
Thickness	7.5mm +/- 10%
Tiles per box	20 tiles (10m ²)
Classification	Commercial Extra Heavy Duty*

*conditions apply

Guarantees

Wear warranty	15 years*
Castor chair proof	10 years*
Anti-static	Lifetime*
Colorfastness warranty	20 years*

*conditions apply

Shipping






QuickShip

QuickShip products can be despatched within **24 hours**.

Technical Data

Fire test method	AS/ISO 9239.1-2003
Critical heat flux	Mean result 7.0kW/m ²
Smoke deviation rate	Mean result 118%.min
Dimensional stability	-0.05%
Electrostatic propensity	<0.3000 kv
Thermal resistance	0.68m ² K/W
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m ³ or less
Colorfastness test method	ISO 105-B02
Rating	6-7
Mildew and Odour	HN 0028-2004 Determination of Mildew Growth and Odour on Trim Material. Rating = satisfactory

Sustainability




Acoustic Performance

Test method ASTM C423-2022: Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method

Rating method AS ISO 11654 -2002: Acoustics - Rating of sound absorption - Material and systems


Test results NRC 0.25 | SAA 0.22

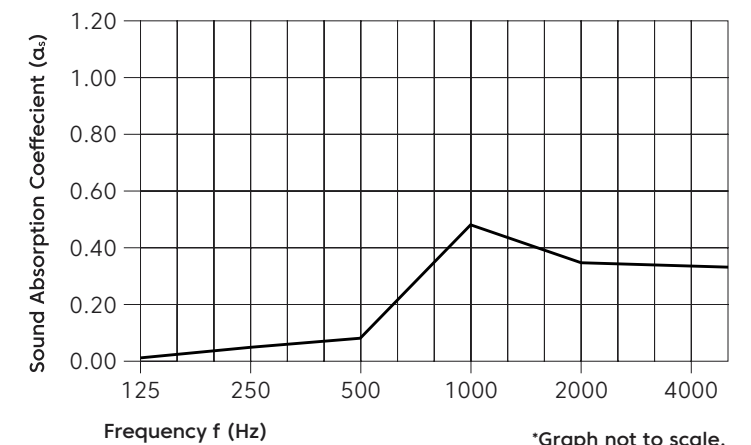

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
α _s	0.01	0.05	0.09	0.48	0.37	0.35	0.25

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results. **Sound Absorption Average (SAA)** indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz


Configurations

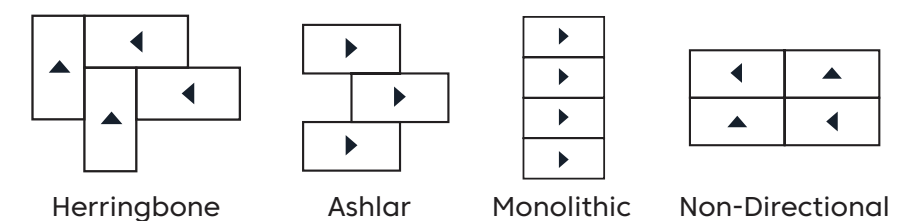

Colorways



Comet - IS01

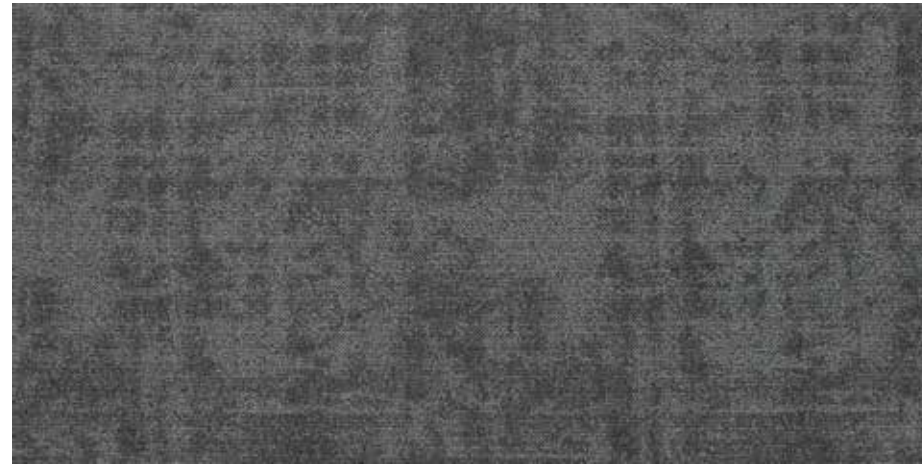

Mercury - IS02



Earth - IS08



Sun - IS06

Gun Metal
SC02



Moon - IS04



Saturn - IS05



Neptune - IS07



Jupiter - IS03