

Layered Ceiling Baffles

Specifications

Application Ceiling

Material FilaSorb™ polyester felt

Recycled content 60% min Weight 2400gsm **Thickness** 24mm +/- 10%

200 x 1400mm - 1.15kg per 24mm baffle **Dimensions**

200 x 2800mm - 2.3kg per 24mm baffle

Technical Data

Fire test method Result pending SCS-EC10.3-2014 v4.0 Total VOC test method meeting standard CDPH/EHLB Standard Method v.1.2-2017 **Total VOC result** $\leq 0.5 \text{mg/m}^3$

Colorfastness test method ISO 105-B02

6-7 Ratina

Water vapour sorption method ASTM C1104-2019

(Procedure A Modified)

0.20% (results based on a Water sorbed by weight

12mm thick panel)

Sustainability



Made from 60% min. recycled content

Acoustic Felt material

is made with 30-40%

solar energy*

*made in Thailand



Material 'Take Back' program allows our product to be recycled



Details

Lead time 2-3 weeks Origin Australia Warranty against defects 20 years* Colorfastness warranty 20 years* *conditions apply



Declare.





Acoustic Performance

Test method

ASTM C423-17: Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method

Installation method


J, Sample tested 6 baffles each 2.8m x 0.3m x 24mm

Rating method

AS ISO 11654 -2002: Acoustics - Rating of sound absorption - Material and systems

Test results

NRC 1.15 aw <1.0 (MH), Class E

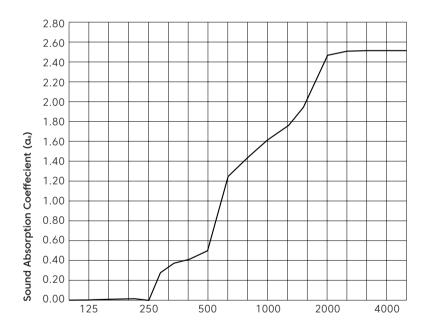

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
24mm	0.01	0.00	0.56	1.45	2.52	2.55	1.15

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. **Sound Absorption Average (SAA)** indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz




Reveal Design


Sizes

Height200mmLength2780mm
Custom sizes available


Reveal 1 (RE1)

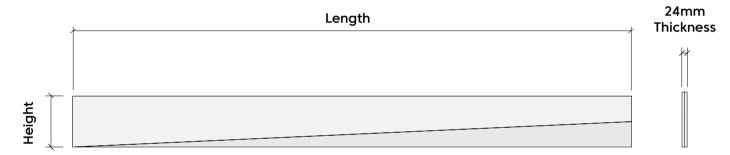

Hardware Spacing

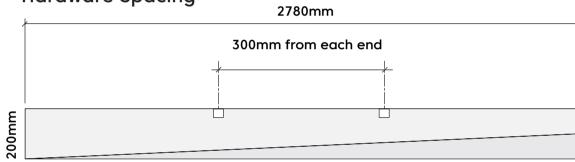


Reveal 2 (RE2)

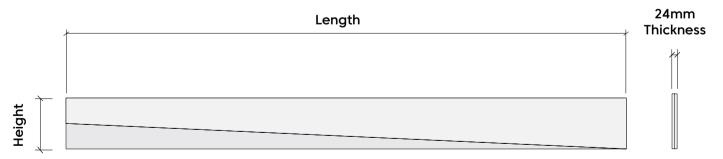




Reveal Recommended Layouts


Layout 1 (100% RE1)

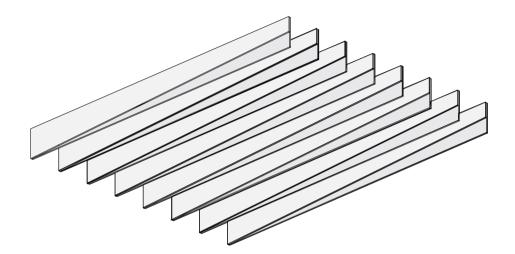


Layout 3 (50% RE1 & 50% RE2)

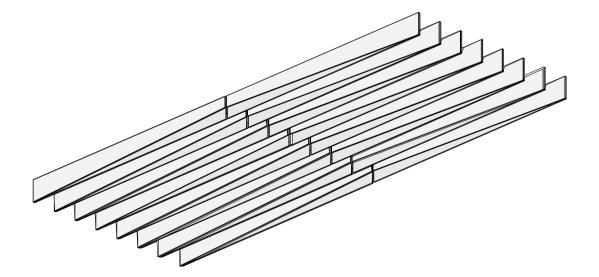

Layout 2 (100% RE2)

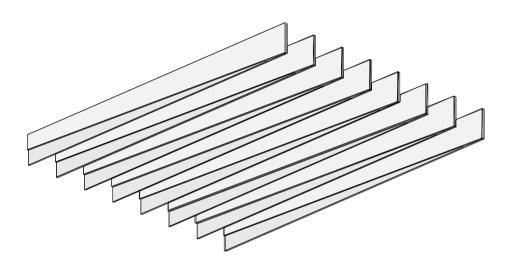

Layout 4 (50% RE1 & 50% RE2)

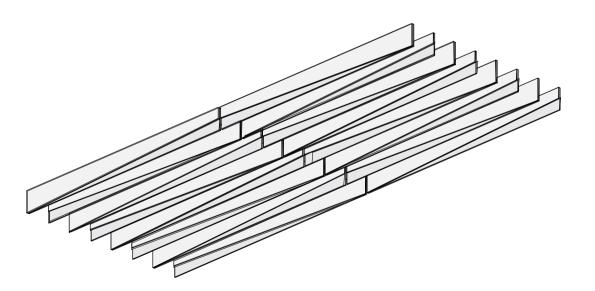



Groove Design

Sizes


Height	200mm
Length	2780mm Custom sizes available


Groove 1 (GR1)

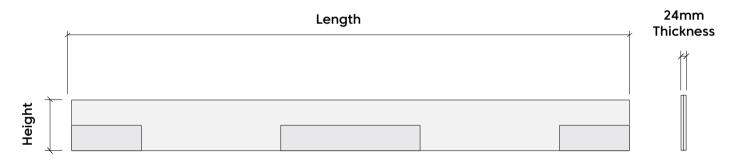

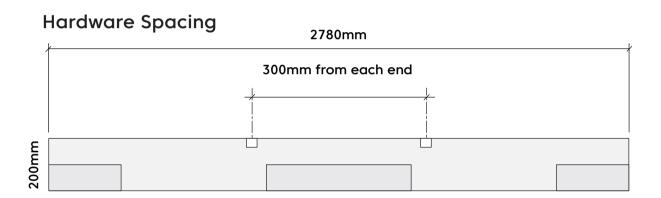

Groove 2 (GR2)

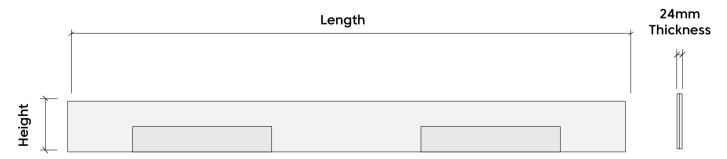


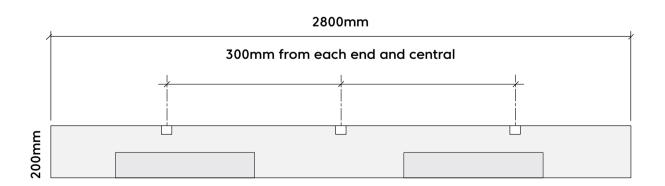




Groove Recommended Layouts


Layout 1 (100% GR1)

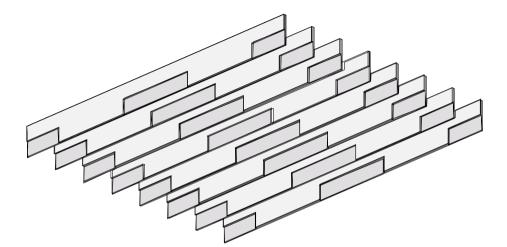

Layout 2 (100% GR2)

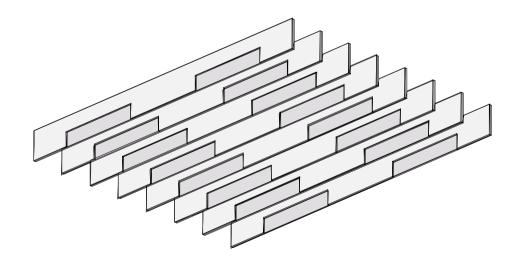

Layout 3 (50% GR1 & 50% GR2)

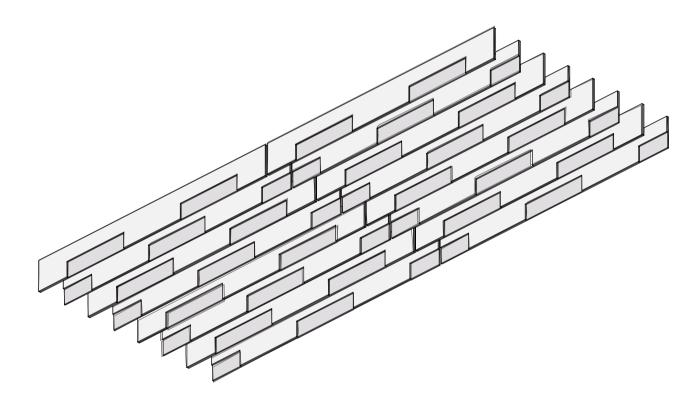

FilaSorb™ Colorways




Can't find a color?

We are constantly updating our palette, which includes adding and discontinuing certain color lines. If you can't find the color you are looking for, please contact us with your color request, as we may still have stock available.




Mounting Methods


Cable

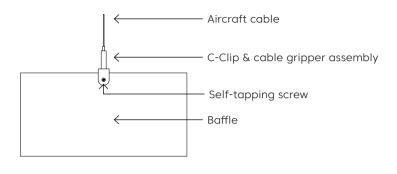


Cable to deck

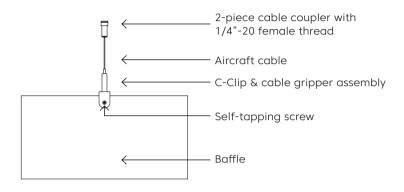


Cable to T-grid

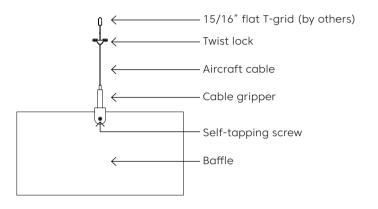


Swivel cable to deck

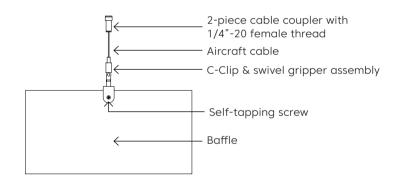


Threaded Rod

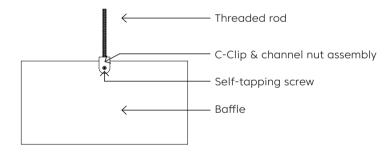

Threaded Rod to Unistrut

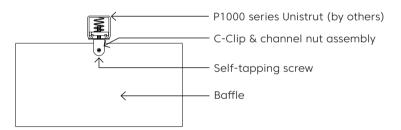

Twist lock to T-grid

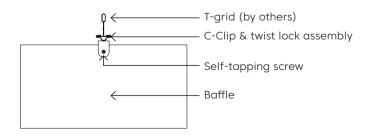

Magnet to T-grid

