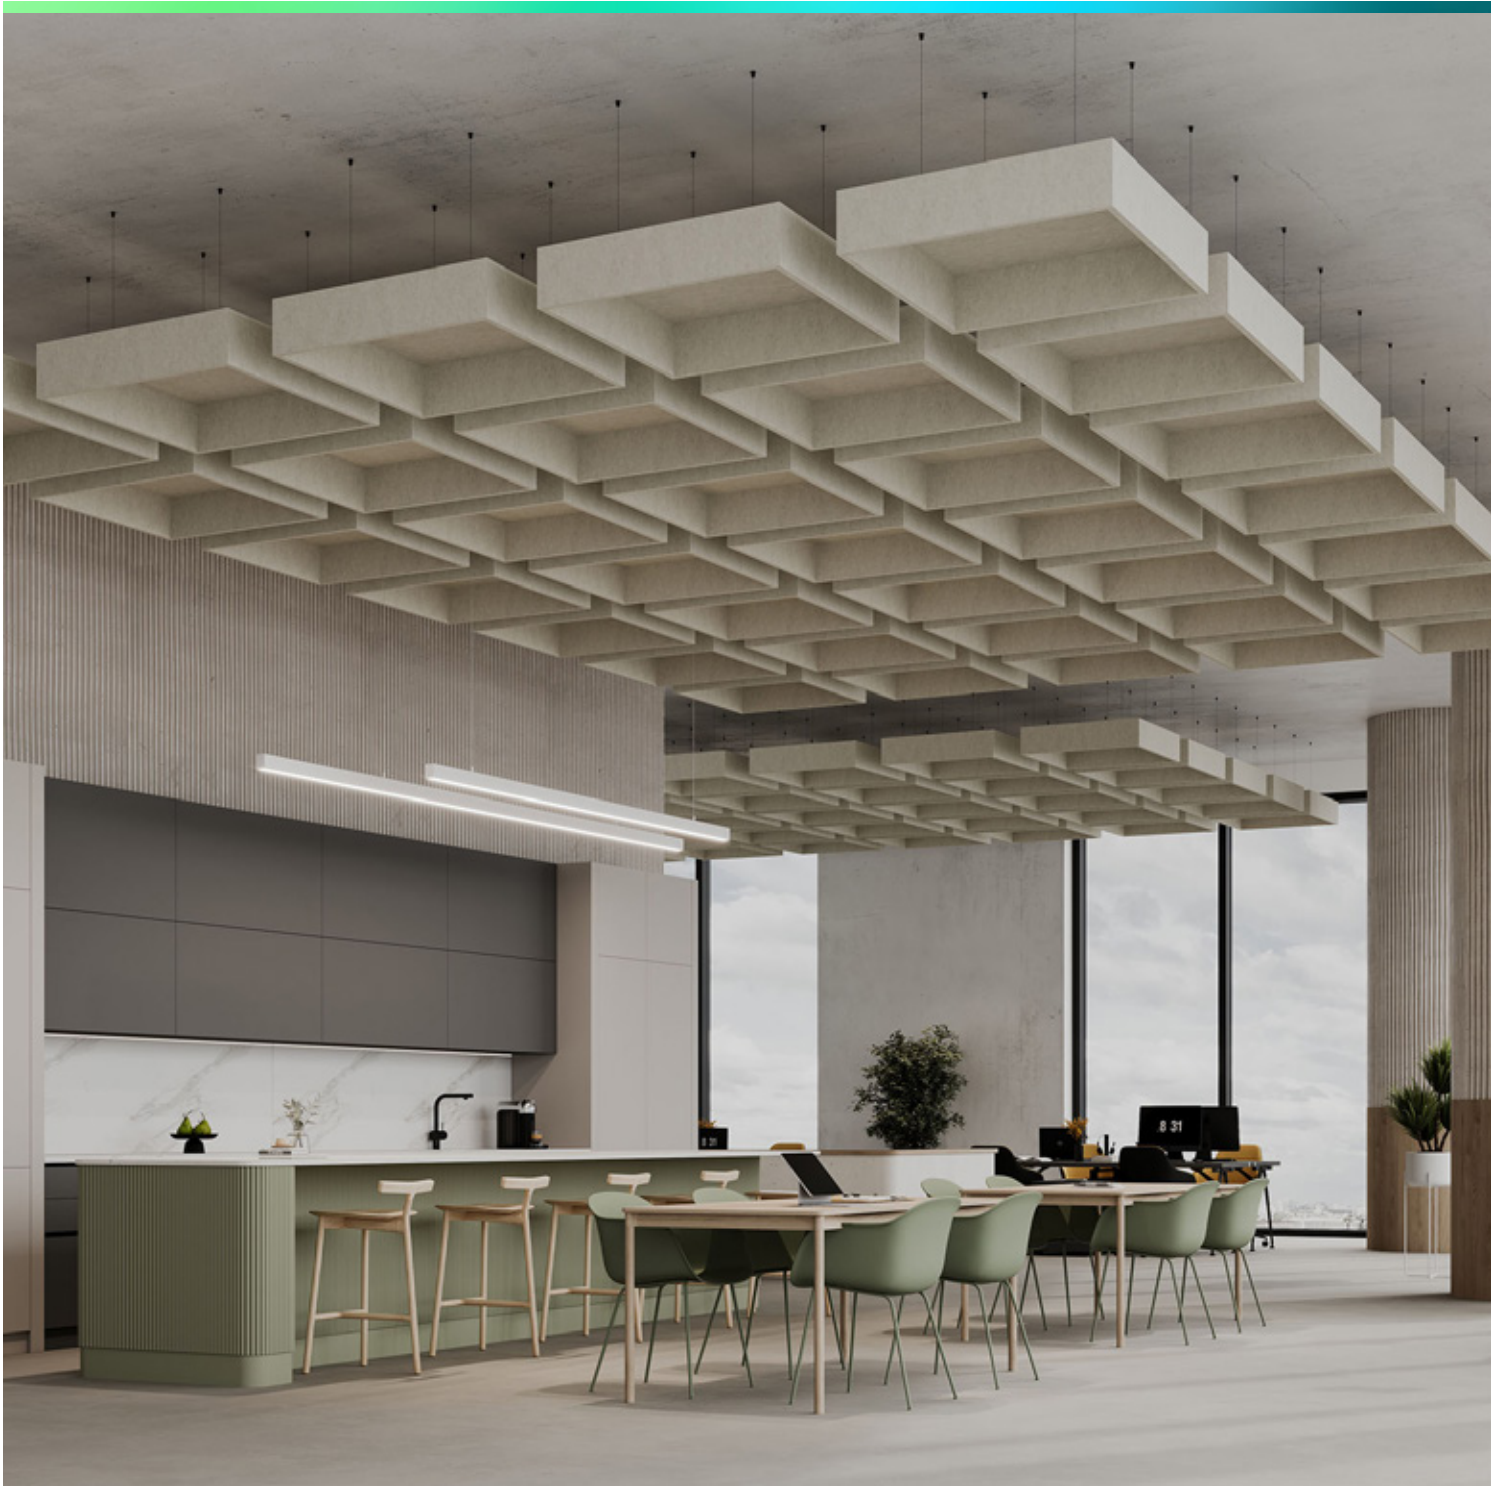




Pan

Ceiling Clouds

Premier Collection

Pan is a dimensional ceiling cloud designed to make high-ceiling spaces feel more intimate and conversation-friendly. Its raised center sits higher than its perimeter, adding visual depth while enhancing sound absorption. With a range of sizes, widths, lengths, and heights available, Pan allows you to craft a customized, dynamic ceiling environment that perfectly suits your space.

Specifications

Surface	Ceiling		
Material	FilaSorb™ polyester felt		
Weight	2400gsm		
Standard Sizes	Slat Thickness	Height	Width x Length
	25mm T	102, 152, 203mm	610 W x 1219mm L
			914 W x 914mm L 1219 W x 1219mmL



Pan Ceiling Cloud in Almond

Technical

NRC Rating	Pending product testing
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental































Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Pan Ceiling Clouds | May 2026

							
White WH12	Milkyway MI74	Ivory IV11	Pearl PE21	Valentine VA70	Quartz QU67	Stonewash ST72	Sea Salt SE57
							
Platinum PL04	Almond AL55	Pistachio PI25	Turmeric TU60	Flamingo FL61	Amethyst AM69	Periwinkle PE23	Peacock PE20
							
Metal ME03	Mushroom MU75	Celery CE65	Wheat WH68	Peach PE19	Lilac LI13	Marine MA15	Senchai SE58
							
Grey GR02	Umber UM54	Wasabi WA29	Popcorn PO26	Currant CU59	Berry BE06	Azure AZ05	Oregano OR18
							
Charcoal CH01	Walnut WA56	Eucalyptus EU71	Carrot CA08	Loganberry LO77	Granite GR62	Denim DE09	Kale KA12
							
Piano Black PI24	Slate SL27	Nori NO76	Peppercorn PE22	Shiraz SH63	Flint FL64	Midnight MI16	





For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Pan Ceiling Clouds | May 2026



Sizes

Standard Sizes	Slat Thickness	Height	Width x Length
	25mm T	102, 152, 203mm H	610mm W x 1219mm L 914mm W x 914mm L 1219mm W x 1219mm L

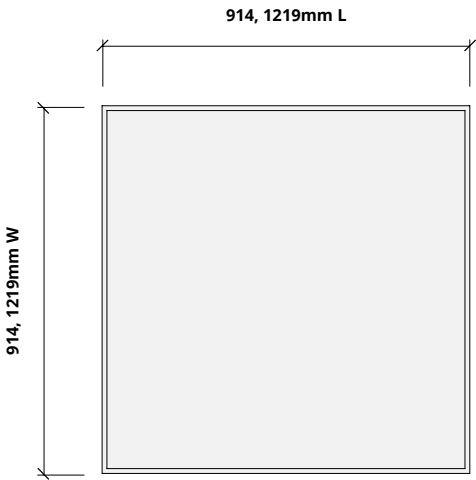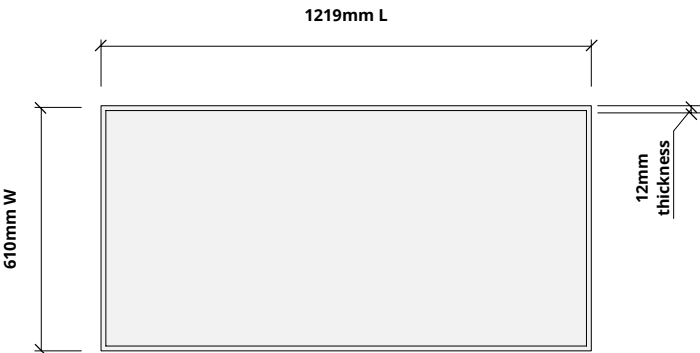Plan






Elevation

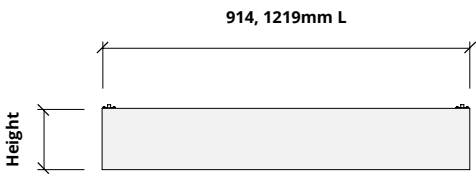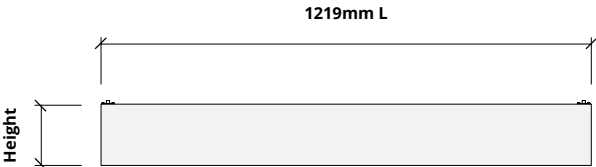

Hardware Spacing

610mm W	574mm on center spacing
914mm W	610mm on center spacing
1219mm W	914mm on center spacing
914mm L	878mm on center spacing
1219mm L	1183mm on center spacing

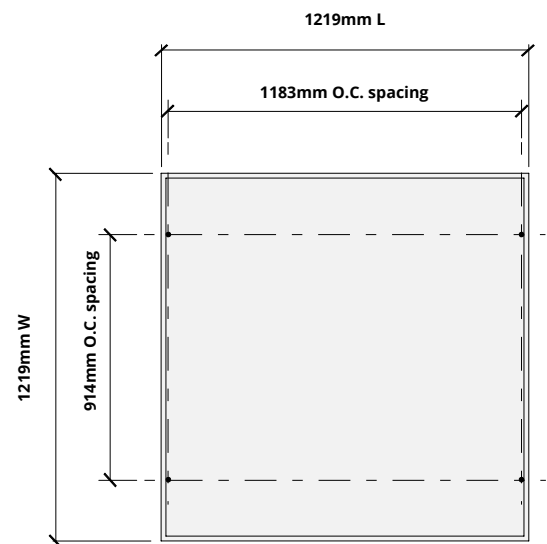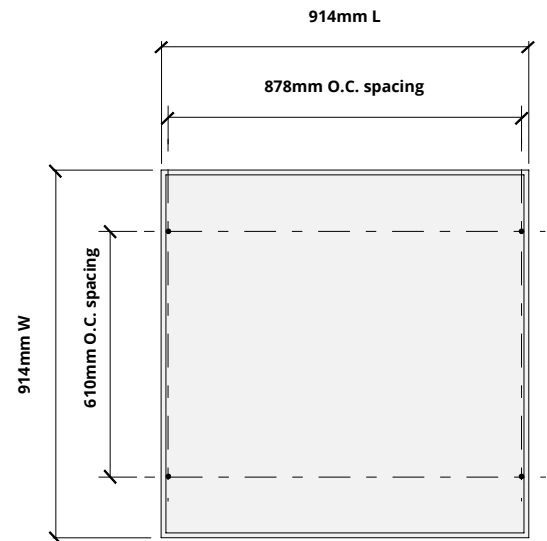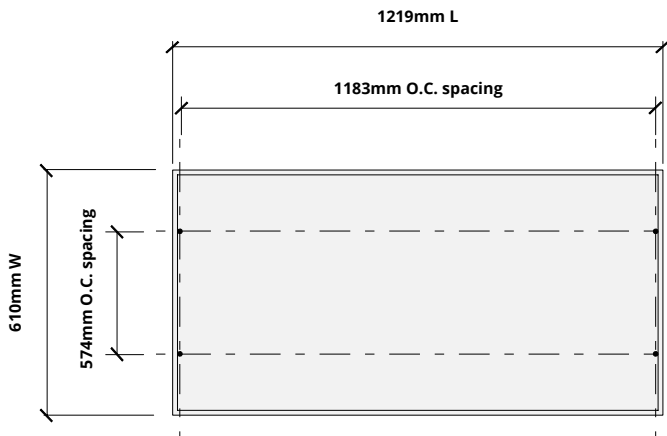

How to Specify

1. Choose Sizes

2. Choose Colorways

3. Choose Mounting Method

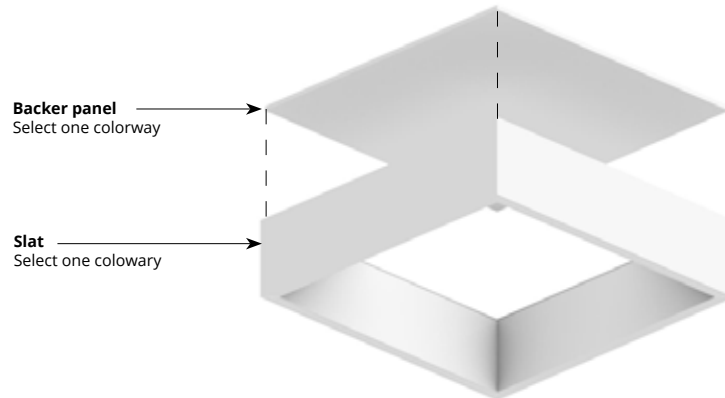
Select desired height and grid size.

1. Choose Sizes

2. Choose Colorway

3. Choose Mounting Method

Select one colorway for your slats and one colorway for your backer panel; or one colorway for both. See page 3 for colorways.



Product ships assembled.

1. Choose Sizes

2. Choose Colorway

3. Choose Mounting Method

There are several mounting methods available. Choose one that works best for your project needs and preferred aesthetic.




For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462


Pan Ceiling Clouds | May 2026

Mounting Methods

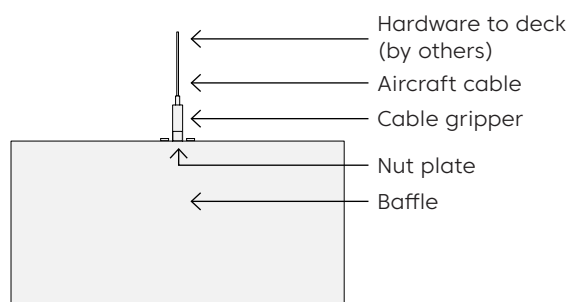
Cable



Cable to deck

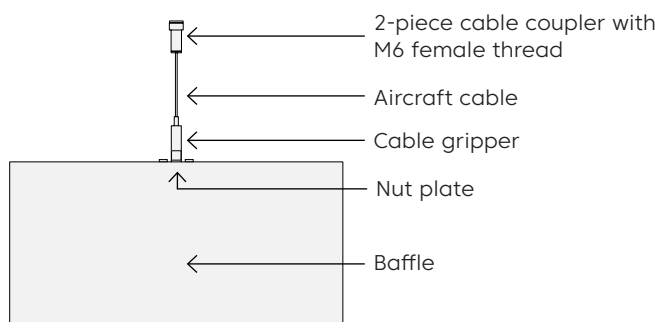

Threaded rod

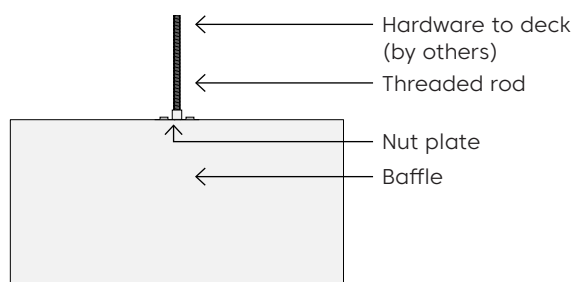


For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Pan Ceiling Clouds | May 2026

Acoustic Performance

Test Method	ASTM E795-16
Install Method	A
Rating Method	ISO 11654-1997
Test Results	Pending product testing

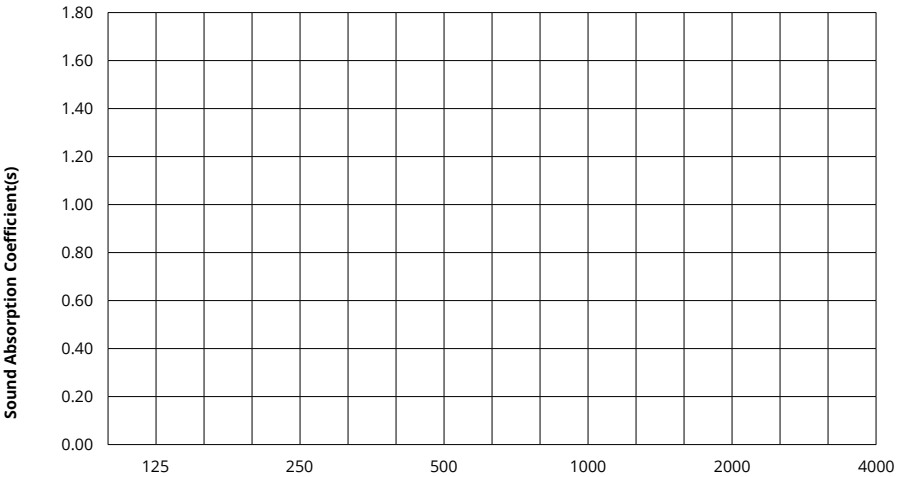

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	12mm							

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com.au or call 1800 626 462