



Pan


Ceiling Clouds

WoodGrain Collection

Pan is a dimensional ceiling cloud designed to make high-ceiling spaces feel more intimate and conversation-friendly. Its raised center sits higher than its perimeter, adding visual depth while enhancing sound absorption. With a range of sizes, widths, lengths, and heights available, Pan allows you to craft a customized, dynamic ceiling environment that perfectly suits your space.

Specifications

Surface	Ceiling		
Material	FilaSorb™ polyester felt		
Thickness	12mm (±10%)		
Weight	2400gsm		
Standard Sizes	Slat Thickness	Height	Width x Length
	25mm T	102, 152,	610mm W X 1220mm L
		203mm H	915mm W x 915mm L
			1220mm W x 1220mmL

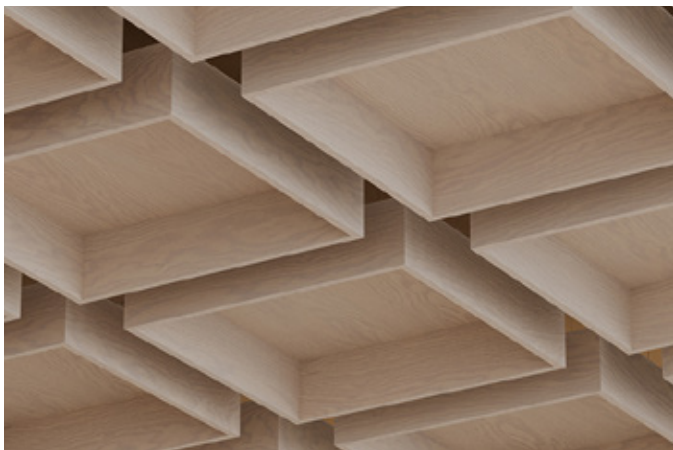

Pan Ceiling Cloud in Petrified Ash

Technical

NRC Rating	Pending product testing
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Pan Ceiling Clouds | June 2026

Colorways

WOODGRAIN



Picket Fence
WQ01




Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30




White Oak
WQ13



Baltic Birch
WQ12




Knotty Spruce
WQ29




French Bobbin
WQ08



Boat Shed
WQ02



Nordic Plank
WQ15




Boardwalk
WQ10




Mocha Legno
WQ25



Mountain Lodge
WQ24




Wine Barrel
WQ03




Log Cabin
WQ04




Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21




Weathered Slate
WQ14




Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18




Charred Larch
WQ09



Shadow Oak
WQ28




Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27





For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Pan Ceiling Clouds | June 2026



Sizes

Standard Sizes	Slat Thickness	Height	Width x Length
	25mm T	102, 152, 203mm H	610mm W X 1220mm L 915mm W x 915mm L 1220mm W x 1220mm L

Plan


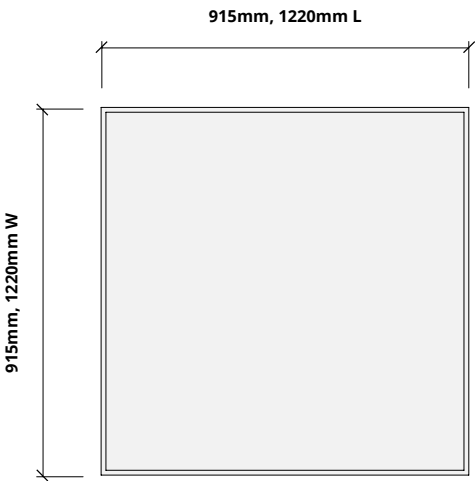
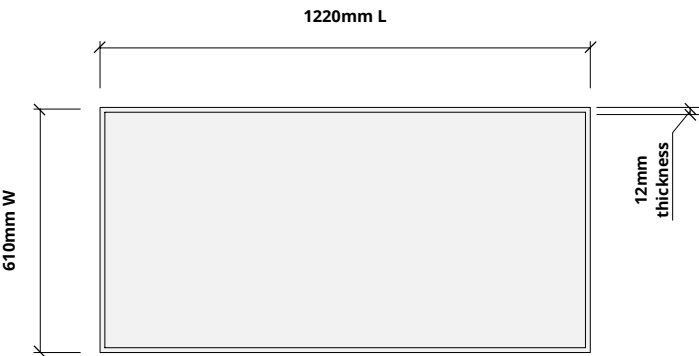


Elevation

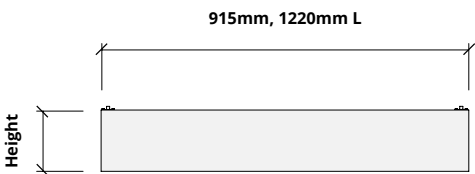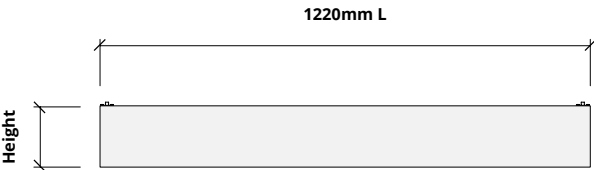

Hardware Spacing

610mm W	574mm on center spacing
915mm W	610mm on center spacing
1220mm W	915mm on center spacing
915mm L	878mm on center spacing
1220mm L	1183mm on center spacing

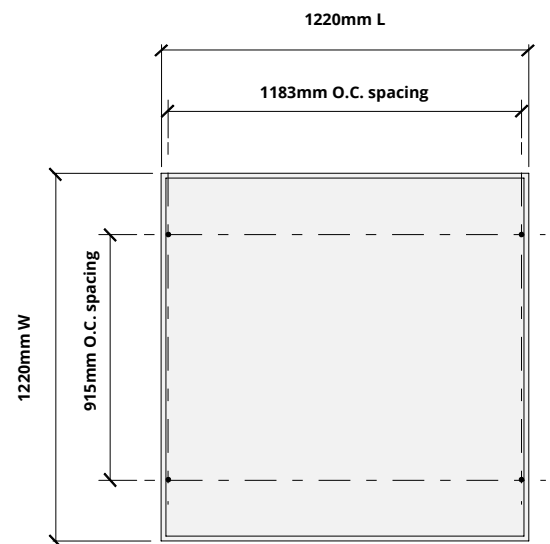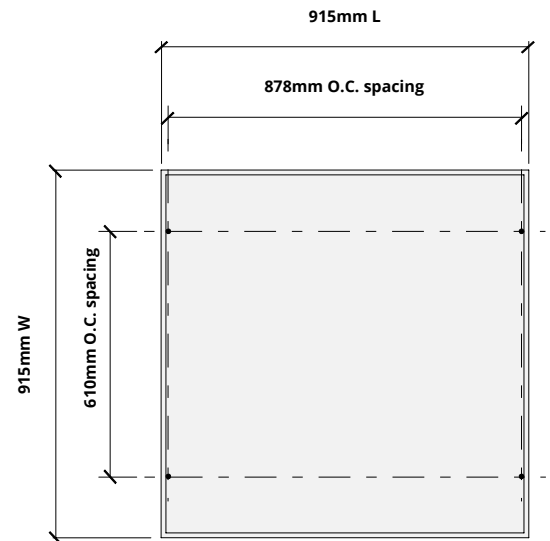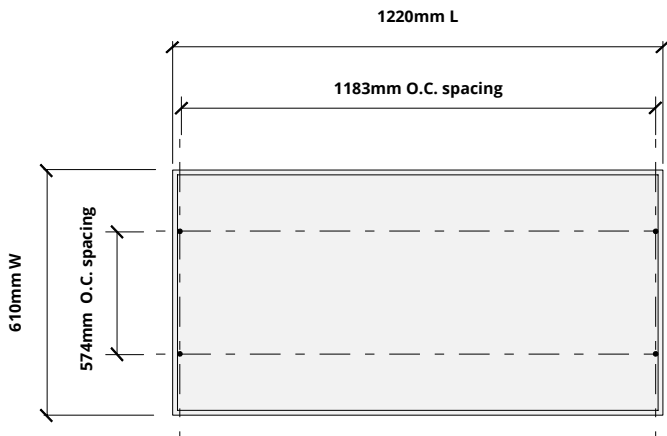

For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Pan Ceiling Clouds | June 2026

How to Specify

1. Choose Sizes

2. Choose Colorways

3. Choose Mounting Method


Select desired height and grid size.

1. Choose Sizes

2. Choose Colorway

3. Choose Mounting Method

Select one colorway for your slats and one colorway for your backer panel; or one colorway for both. See pages 3 and 4 for colorways.

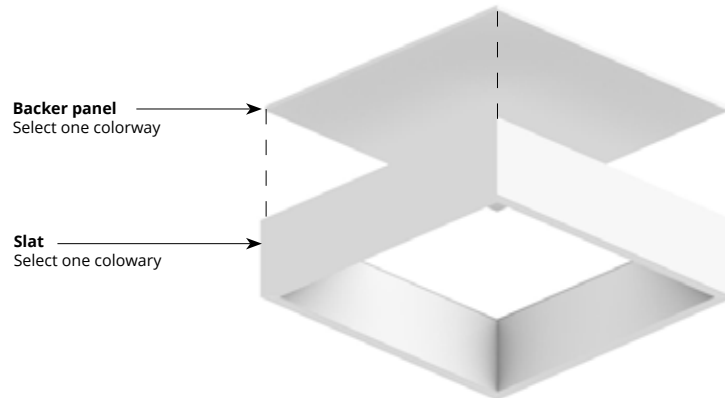

Product ships assembled.

1. Choose Sizes

2. Choose Colorway

3. Choose Mounting Method

There are several mounting methods available. Choose one that works best for your project needs and preferred aesthetic.




For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462


Pan Ceiling Clouds | June 2026

Mounting Methods


Cable

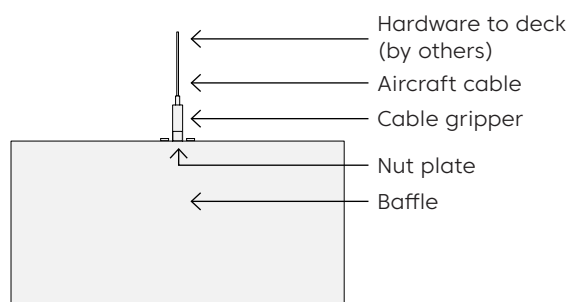

Cable to deck

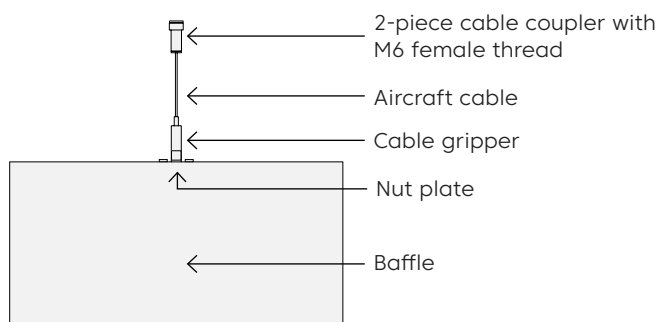

Threaded rod

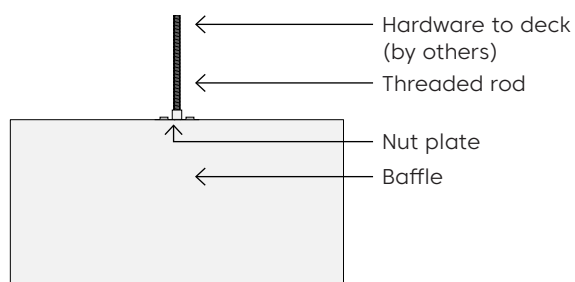


For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Pan Ceiling Clouds | June 2026

Acoustic Performance

Test Method	ASTM E795-16
Install Method	A
Rating Method	ISO 11654-1997
Test Results	Pending product testing

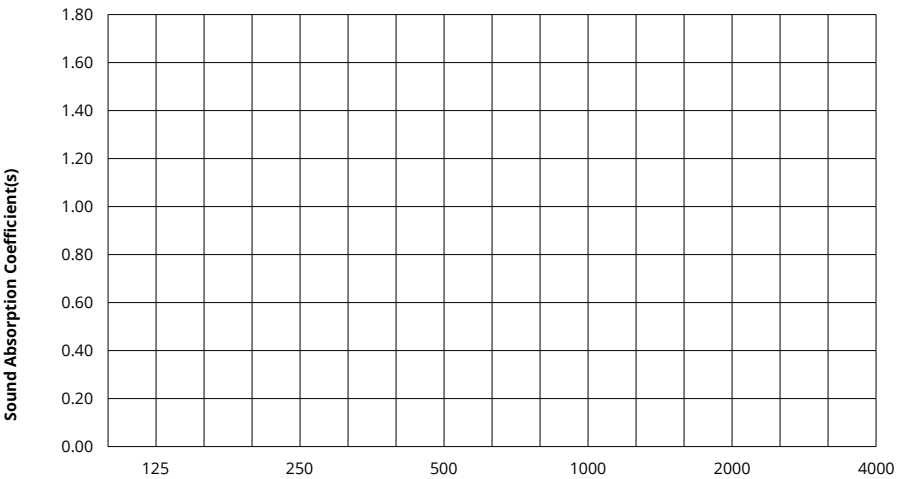

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	12mm							

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com.au or call 1800 626 462