acoufelt

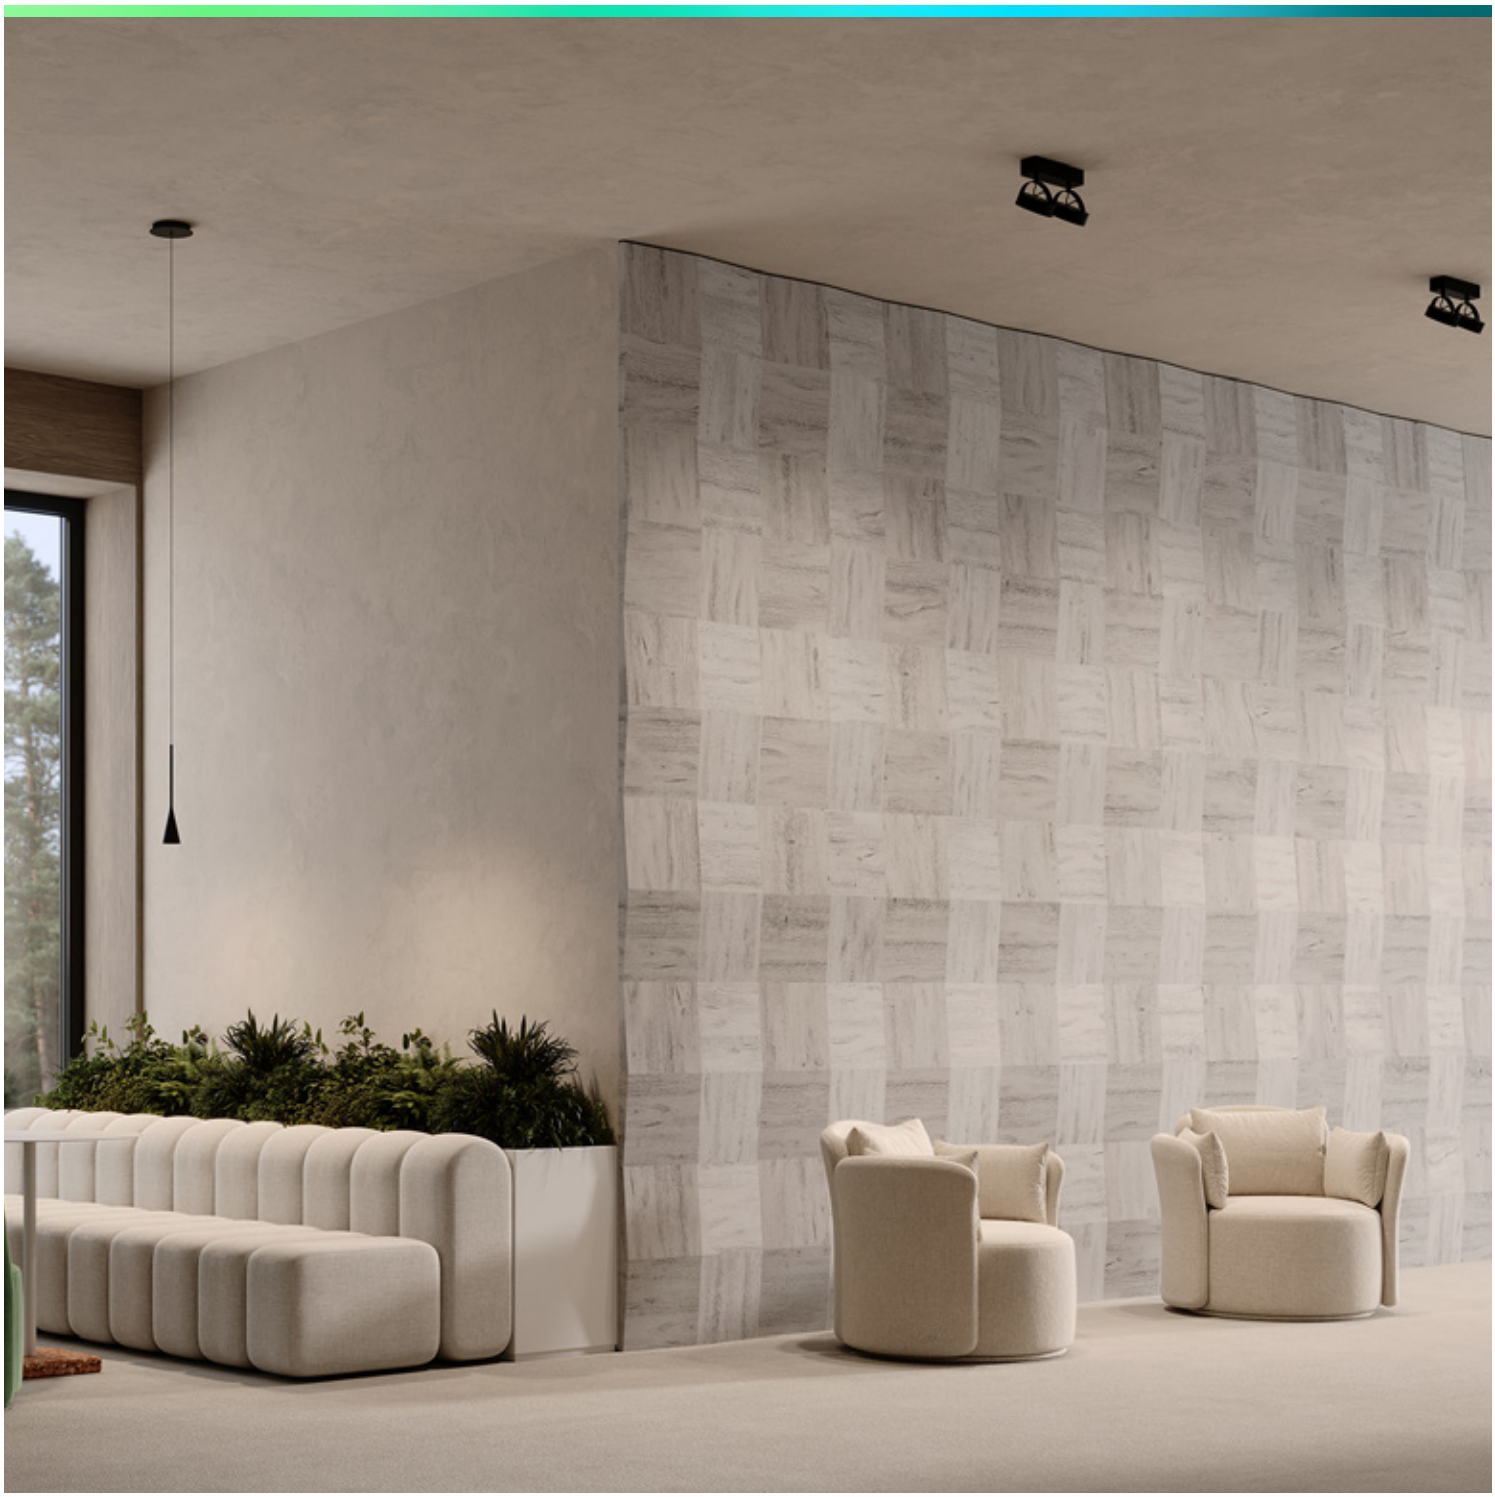

PopUp
Wall Tiles

WoodGrain Collection

Enhance any space with visual intrigue and effective sound control using sculptural, lightweight PopUp Wall Tiles. Designed for creative flexibility, PopUp Tiles are perfect for both large and small spaces—cover expansive areas for maximum sound absorption or craft smaller installations to add visual interest to empty walls. Combining bold aesthetics with significant acoustic performance, PopUp Tiles are the ideal solution for acoustically challenging environments.

Specifications

Surface	Wall
Material	FilaSorb™ polyester felt
Weight	12mm, 2400gsm
Standard Sizes	Width: 100, 300mm W Height: 300, 1220mm H Depth: 50, 75mm D



PopUp Wall Tiles with Dart Pattern in Lyed Larch



PopUp Wall Tiles with Step Pattern in Baltic Birch

Technical

NRC Rating	Pending product testing
Fire Test	Test Result Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

** Rating is estimated based on similar product designs. Comparison NRC results available upon request.*

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

© 2025 Acoufelt. All rights reserved.

Colorways

WOODGRAIN



Picket Fence
WQ01



Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30



White Oak
WQ13



Baltic Birch
WQ12



Knotty Spruce
WQ29



French Bobbin
WQ08



Boat Shed
WQ02



Nordic Plank
WQ15



Boardwalk
WQ10



Mocha Legno
WQ25



Mountain Lodge
WQ24



Wine Barrel
WQ03



Log Cabin
WQ04



Natural Oak
WQ16



Woodland Fog
WQ22



Driftwood
WQ21



Weathered Slate
WQ14



Petrified Ash
WQ23



Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18



Charred Larch
WQ09



Shadow Oak
WQ28



Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27

© 2025 Acoufelt. All rights reserved.

Sizes

Standard Sizes Width: 100, 300mm W
Height: 300, 1220mm H
Depth: 50, 75mm D

Plan

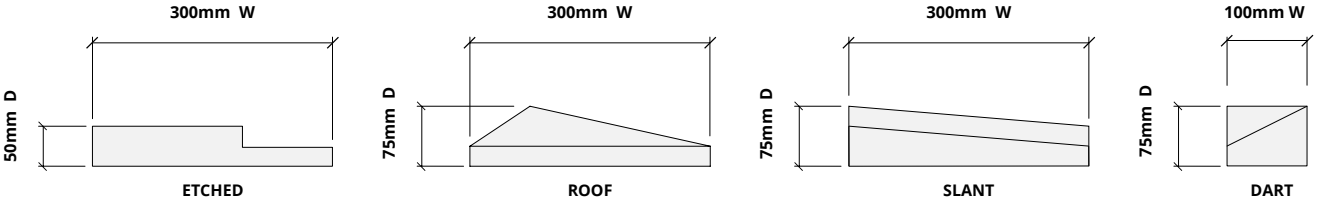

Elevations

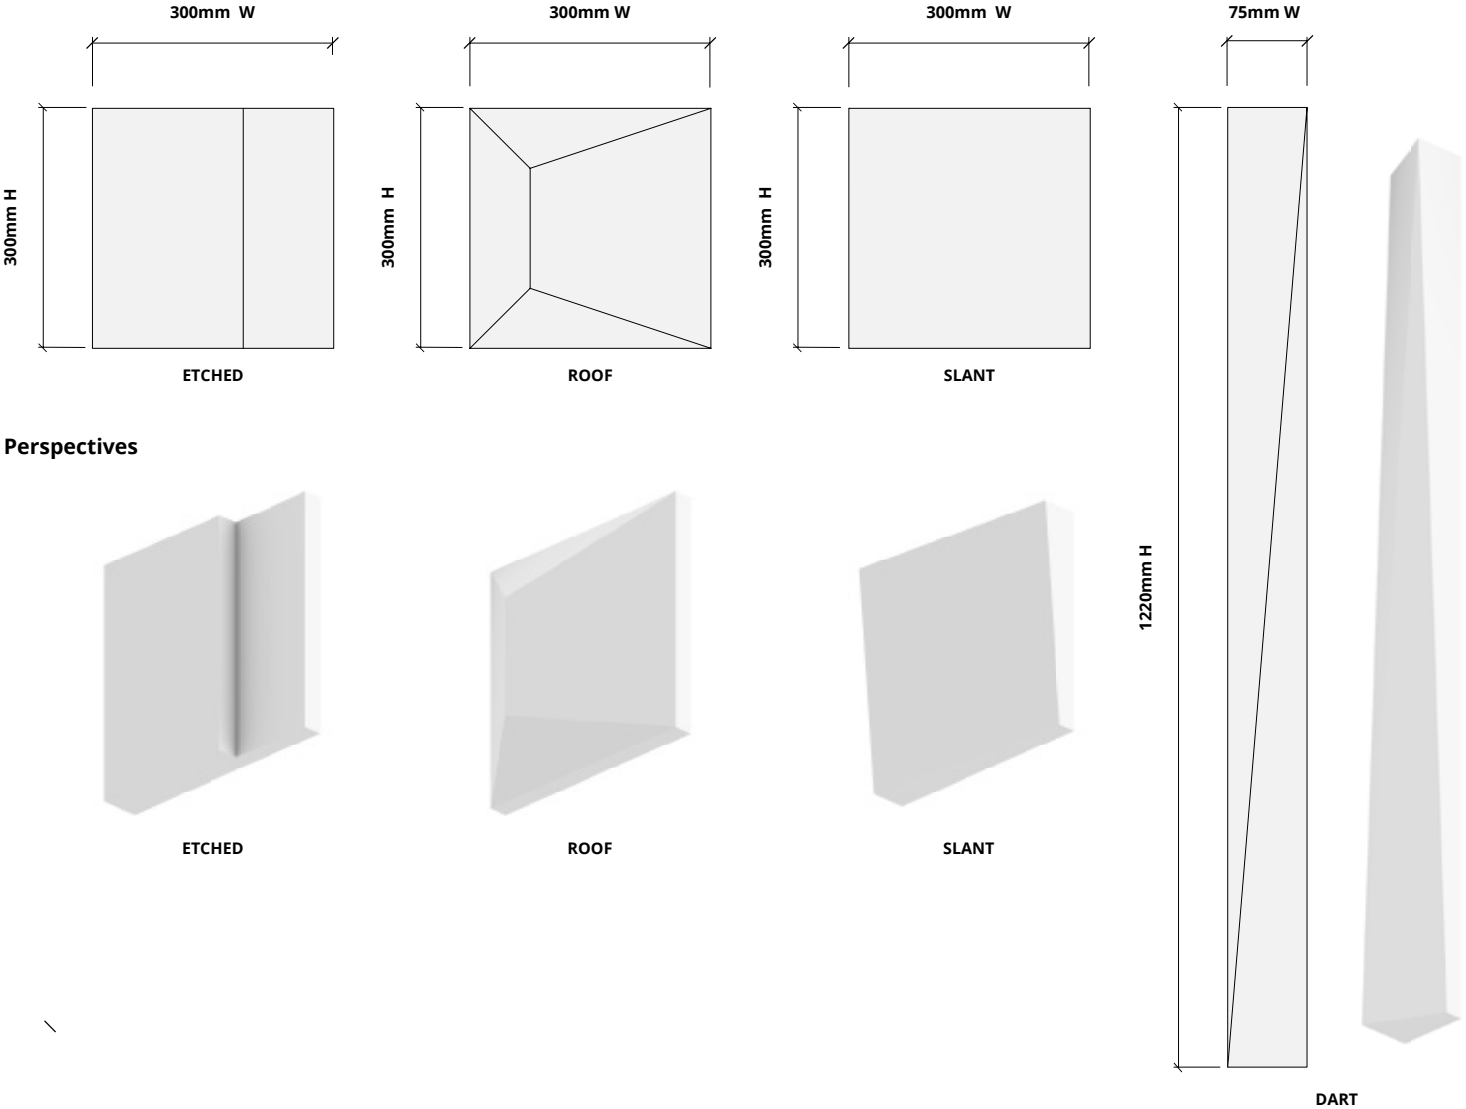

Perspectives

For questions or additional product information, visit **acoufelt.com** or call **800.966.8557**.

© 2025 Acoufelt. All rights reserved.

How to Specify

1. Choose Tile Pattern **2. Choose Colorway**

Select desired panel pattern and size.



ETCHED



ROOF



SLANT



DART

---

1. Choose Tile Pattern **2. Choose Colorway**

Select colorways on page 3.

© 2025 Acoufelt. All rights reserved.

Mounting Methods

Construction adhesive

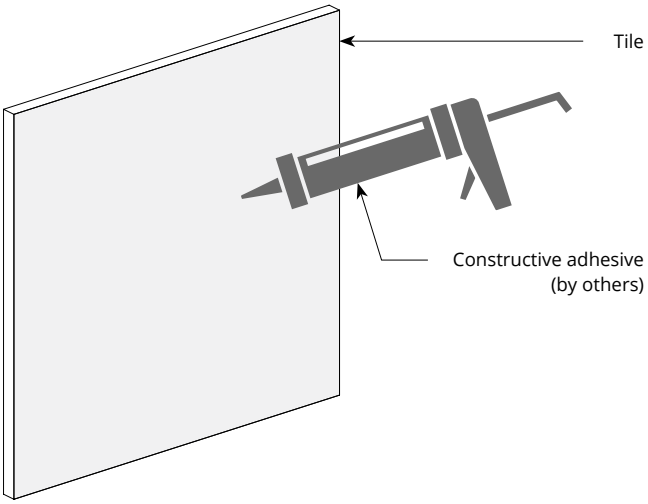

© 2025 Acoufelt. All rights reserved.

Acoustic Performance

Test Method	ISO 354-2006
Install Method	Type A
Mounting Method	No air gap
Rating Method	ISO 11654-1997
Test Results	Pending product testing

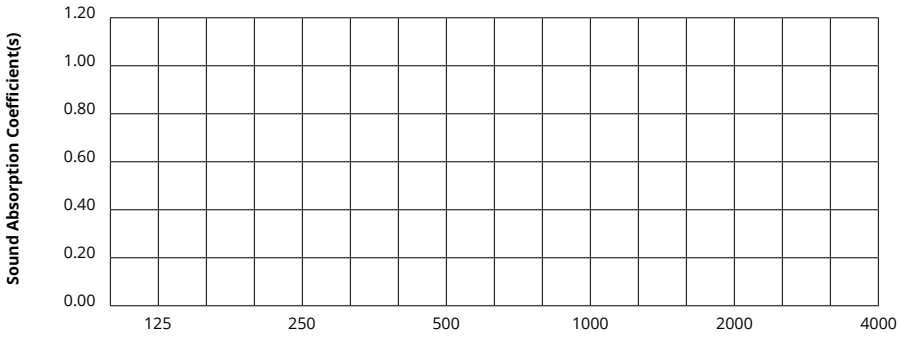

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	Pending product testing						

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

© 2025 Acoufelt. All rights reserved.