



Printed Ceiling Tiles

QuietPrint™

acoufelt
making quiet

Product Detail

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min
Dimensions	595 x 595mm 595 x 1195mm Custom sizes available upon request
Thickness	12mm +/- 10%
Qty per carton	595 x 595mm – 8 595 x 1195mm – 4

Guarantees

Warranty against defects	20 years*
Light fastness warranty	20 years*
	*conditions apply

QuickShip

QuickShip Custom



Custom products have an approx. **6-8 week** lead time from payment and order confirmation.

Technical Data

Fire rating	AS/ISO 9705.1, Group 1 ASTM E84-17a, Class A EN 13501-1: 2019, B-s1, d0
Indoor air quality	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017, ≤ 0.5mg/m ³
Light fastness	ISO 105-B02, 6-7


Sustainability



Made from 60% min. recycled content



Red List Free Declare Label



Generated using 40% solar energy



Recyclable at end-of-life



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)




Phenol & formaldehyde free



Acoustic Performance

Test method	ISO 354-2006
Results	NRC 0.45 (no air gap) NRC 0.54 (12mm air gap) NRC 0.64 (20mm air gap) NRC 0.85 (200mm air gap)

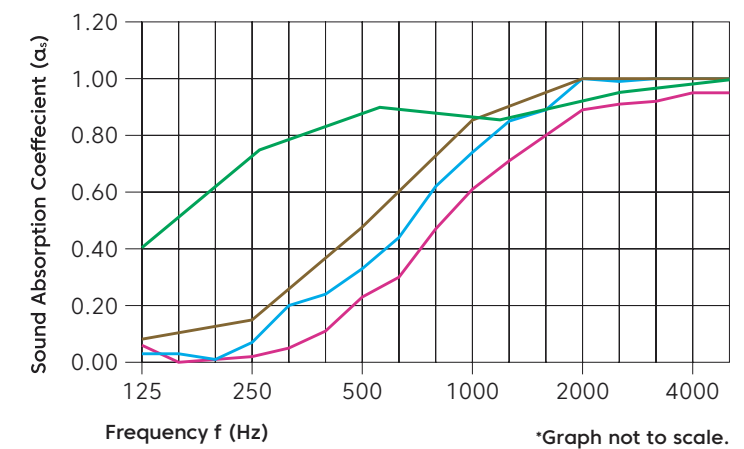


Frequency (Hz)	125	250	500	1000	2000	4000	NRC
α _s no air gap	0.06	0.02	0.23	0.61	0.89	0.95	0.45
α _s 12mm air gap	0.03	0.14	0.33	0.74	1.00	1.00	0.54
α _s 20mm air gap	0.05	0.16	0.48	0.85	1.00	1.00	0.64
α _s 200mm air gap	0.40	0.75	0.90	0.85	0.95	1.00	0.85

Designs




Chevron Timber Oak




Chevron Timber Black



Plywood




Masonry Brick
Rustic Red



Masonry Brick
White



Chevron Fractured



Masonry Concrete
Crater



Masonry Concrete
Speckled



Cement



Volcanic Rock



Black Marble



Cactus




Dragon



Tropical

Mounting Methods

Drop Tile Method

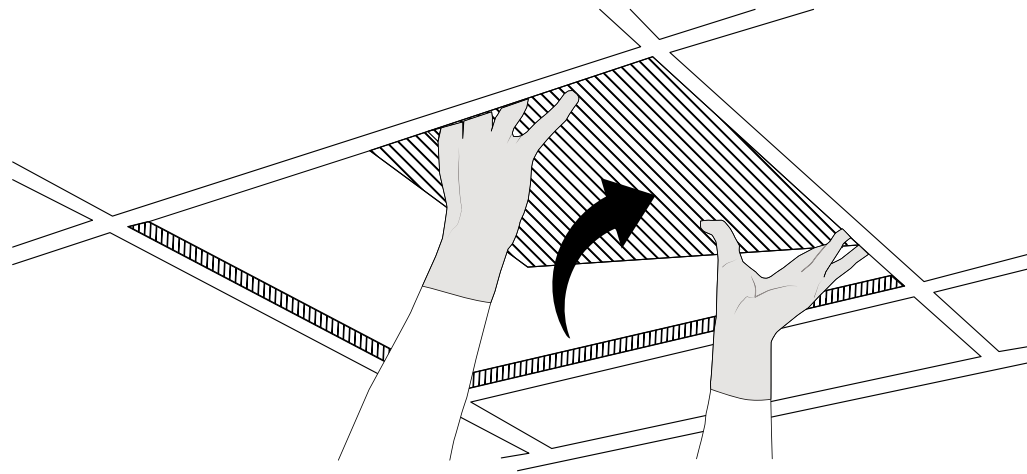

Before installing your tiles, ensure the grid has been installed in accordance with the local building code.