



QuietForm™ Panels

FilaSorb™ 12

acoufelt
making quiet

Product Detail

Application	Wall
Composition	100% Polyester
Material	FilaSorb™
Recycled content	60% min.
Dimensions	1200 x 2800mm
Thickness	12mm with depth to 7.5mm +/- 1mm
Weight	2400 g/m ² +/- 10%

Guarantees

Warranty Against Defects	20 years*
Color Fastness Warranty	20 years*
	*conditions apply

Technical Data

Fire Rating	AS/ISO 9705-1, Group 1 ASTM E84-17a, Class A EN 13501-1: 2019, B-s1, d0
Indoor Air Quality	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017, ≤ 0.5mg/m ³
Color Fastness	ISO 105-B02, 6-7


Sustainability



Made from 60% min. recycled content



Recyclable at end-of-life



Generated using 40% solar energy



Phenol & formaldehyde free




Total VOC's less than 0.5 mg/m³ (3rd Party Verified)



Acoustic Performance


Test Method	ISO 354-2006
Results	NRC 0.45 (no air gap) NRC 0.60 (20mm air gap) NRC 0.75 (50mm air gap)

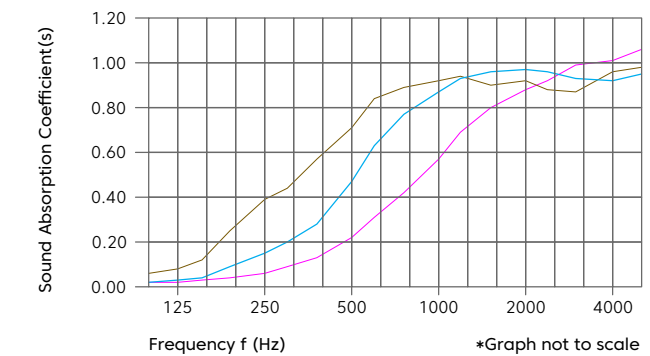



Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
α_s no air gap	0.02	0.06	0.21	0.57	0.88	1.01	0.45
α_s 20mm air gap	0.03	0.15	0.47	0.87	0.97	0.92	0.60
α_s 50mm air gap	0.08	0.39	0.71	0.92	0.92	0.96	0.75

Design

Elevation

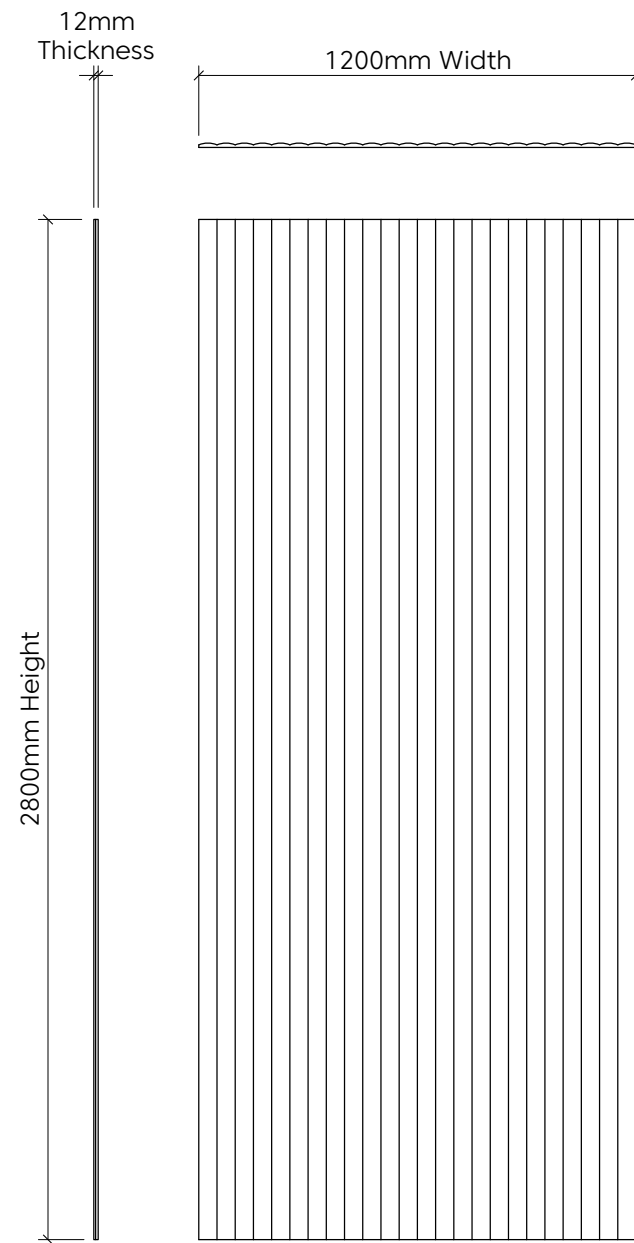

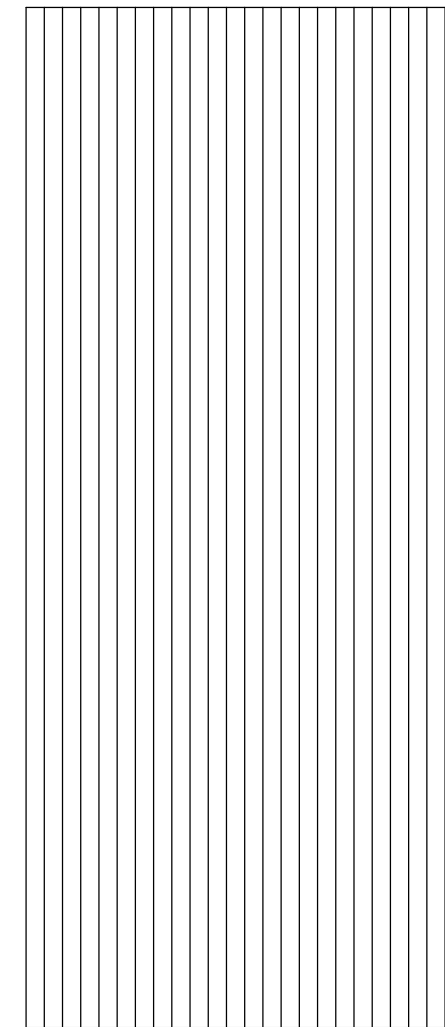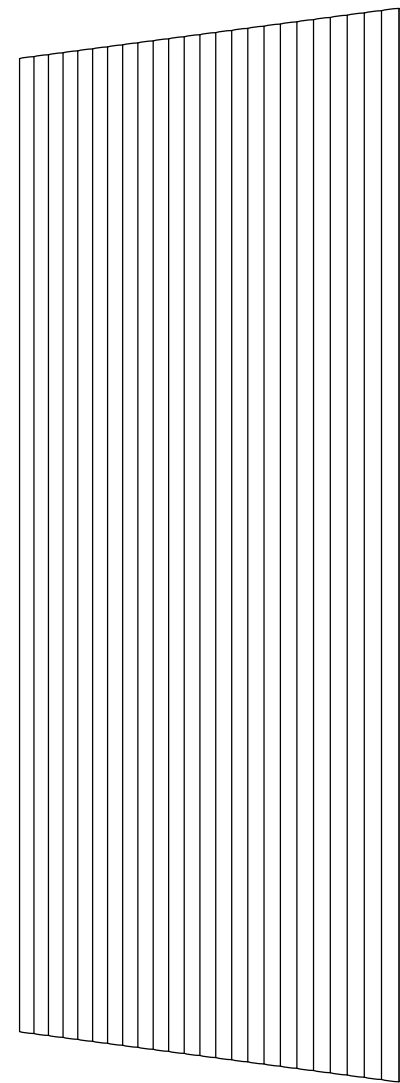

Perspective



Celestial

Colorways

Light Reflectance Values (LRV), are a measure of the percentage of visible and usable light that is reflected from a surface when illuminated by a light source.

									
Peppercorn LRV - 8.50%	Currant LRV - 7.04%	Lipstick Red LRV - 12.50%	Carrot LRV - 20.00%	Peach LRV - 29.00%	Flamingo LRV - 37.54%	Tumeric LRV - 29.59%	Butter LRV - 62.00%	Popcorn LRV - 65.00%	Kale LRV - 4.50%
									
Oregano LRV - 8.80%	Thistle LRV - 13.00%	Wasabi LRV - 38.00%	Sencha LRV - 34.15%	Pistachio LRV - 30.00%	Midnight Blue LRV - 3.50%	Granite LRV - 6.40%	Denim LRV - 6.00%	Peacock LRV - 19.00%	Azur LRV - 18.00%
									
Marine LRV - 25.00%	Periwinkle LRV - 36.00%	Sea Salt LRV - 28.56%	Lilac LRV - 39.00%	Iris LRV - 10.50%	Berry LRV - 12.00%	Piano Black LRV - 3.00%	Charcoal LRV - 5.46%	Slate LRV - 12.50%	Grey LRV - 27.00%
									
Metal LRV - 35.00%	Platinum LRV - 42.00%	Walnut LRV - 12.14%	Umber LRV - 20.35%	Almond LRV - 53.64%	Ivory LRV - 40.00%	Pearl LRV - 54.00%	White LRV - 83.22%		

Mounting Method

Construction Adhesive

