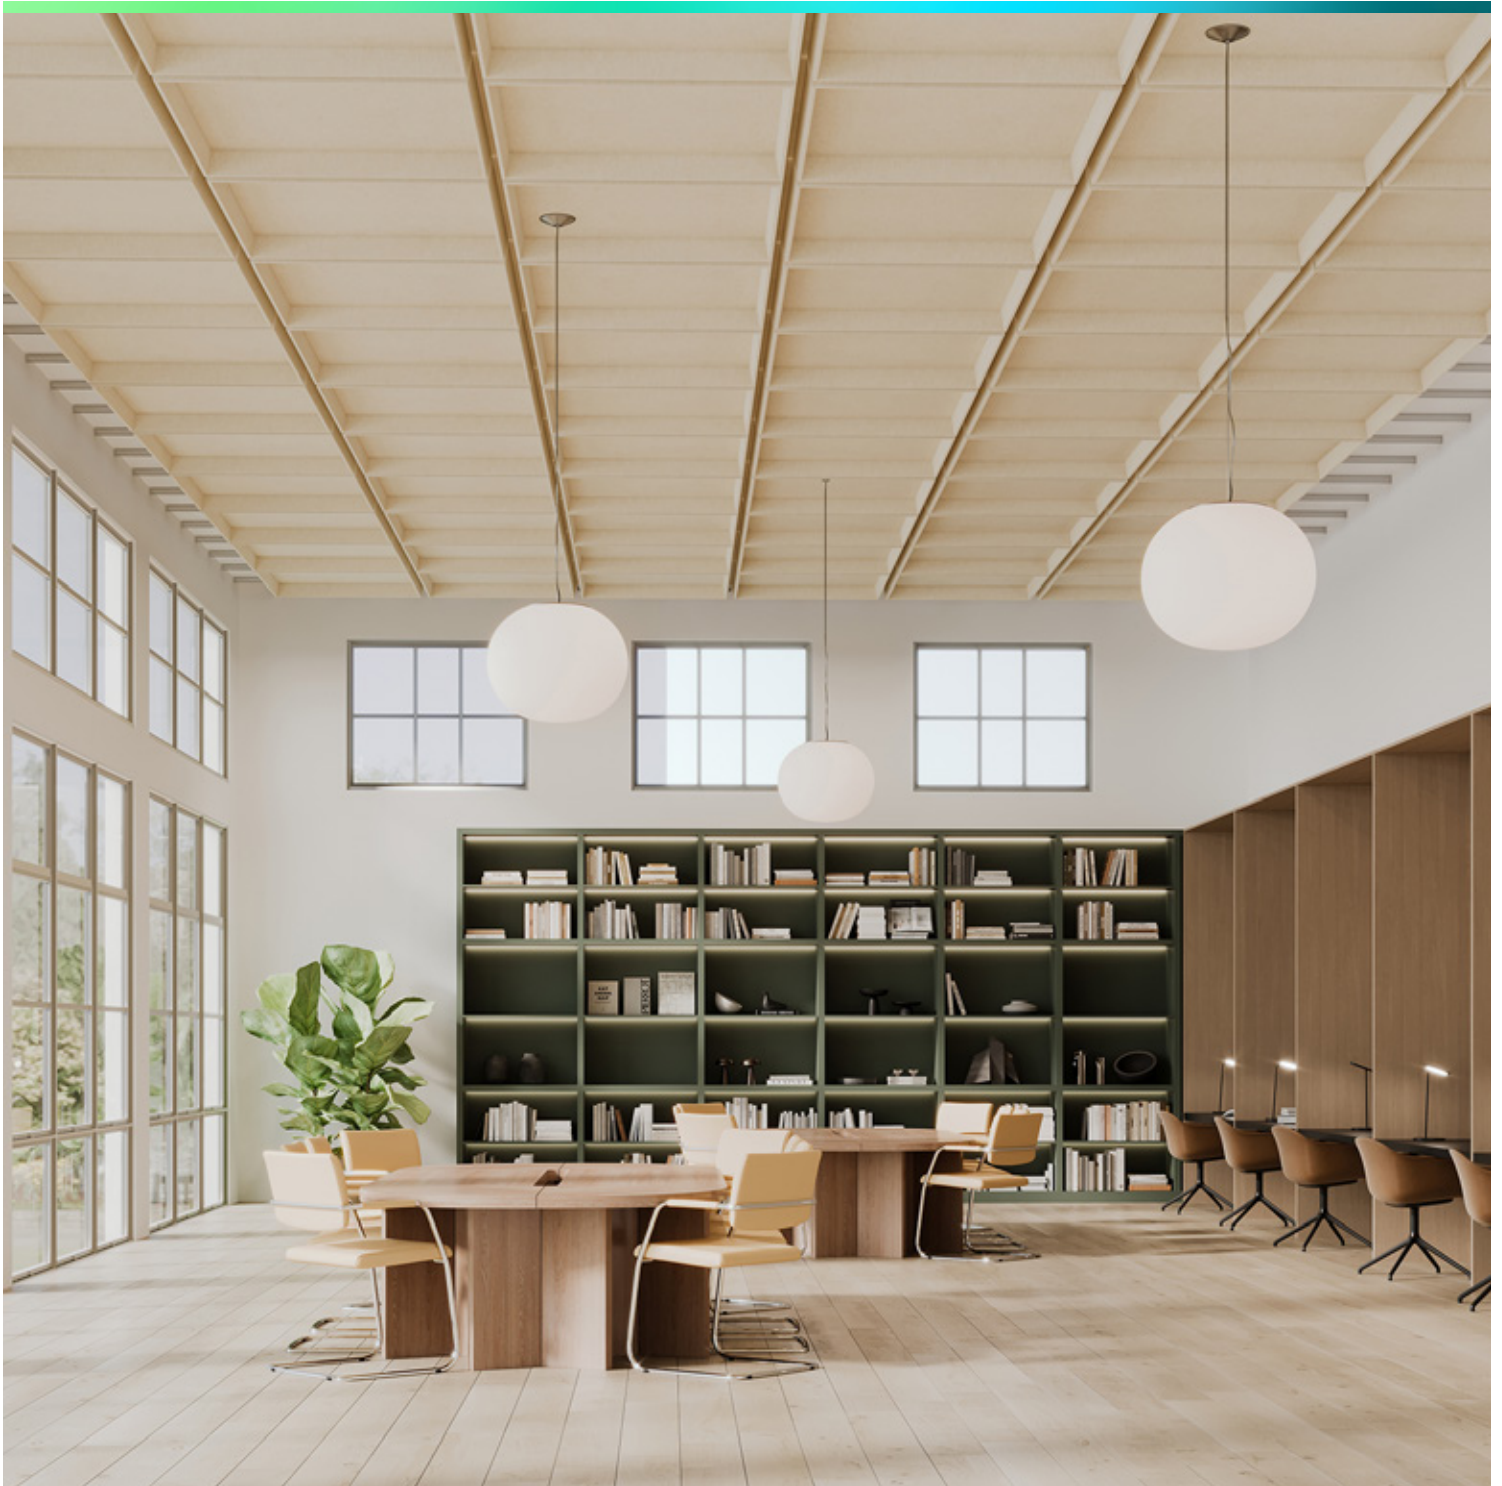




Recess, Chamfer Ceiling Frames

Premier Collection

Chamfer ceiling frames boast a sleek angled edge and a lightweight design, making them easy to install in any space. With a variety of sizes and a wide selection of Premier Collection colors, they offer exceptional design versatility. Elevate any environment with enhanced texture, superior sound management, and striking visual appeal.

Specifications

Surface	Ceiling		
Material	FilaSorb™ polyester felt		
Weight	2400gsm		
Standard Sizes	Thickness	Height	Width x Length
	25mm T	100,150, 190mm H	600mmW x 600mmL 1200mmW x 1200mmL
Compatible T-grid	Type	Layout	
	14mm Flat	Standard 600mm x 600mm	
	24mm Flat	Standard 1200mm x 1200mm	



Recess, Chamfer Ceiling Frame in Pearl

Technical

NRC Rating	Pending product testing
Fire Test	Pending product testing
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

































Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026

							
White WH12	Milkyway MI74	Ivory IV11	Pearl PE21	Valentine VA70	Quartz QU67	Stonewash ST72	Sea Salt SE57
							
Platinum PL04	Almond AL55	Pistachio PI25	Turmeric TU60	Flamingo FL61	Amethyst AM69	Periwinkle PE23	Peacock PE20
							
Metal ME03	Mushroom MU75	Celery CE65	Wheat WH68	Peach PE19	Lilac LI13	Marine MA15	Senchai SE58
							
Grey GR02	Umber UM54	Wasabi WA29	Popcorn PO26	Currant CU59	Berry BE06	Azure AZ05	Oregano OR18
							
Charcoal CH01	Walnut WA56	Eucalyptus EU71	Carrot CA08	Loganberry LO77	Granite GR62	Denim DE09	Kale KA12
							
Piano Black PI24	Slate SL27	Nori NO76	Peppercorn PE22	Shiraz SH63	Flint FL64	Midnight MI16	




For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026

Sizes


Standard Sizes	Thickness	Height	Width x Length	Compatible T-grid	Type	Layout
	25mm T	100, 150, 190mm H	600mm W x 600mm L 1200mm W x 1200mm L		14mm Flat 24mm Flat	Standard 600mm x 600mm Standard 1200mm x 1200mm

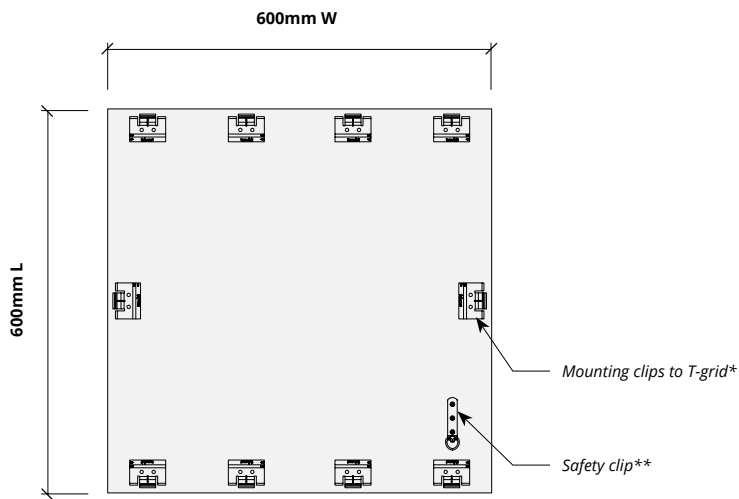Plan




*Clip spacing may differ. Product ships assembled.
**Safety cable comes standard on all Recess product lines. See installation guides for additional details.

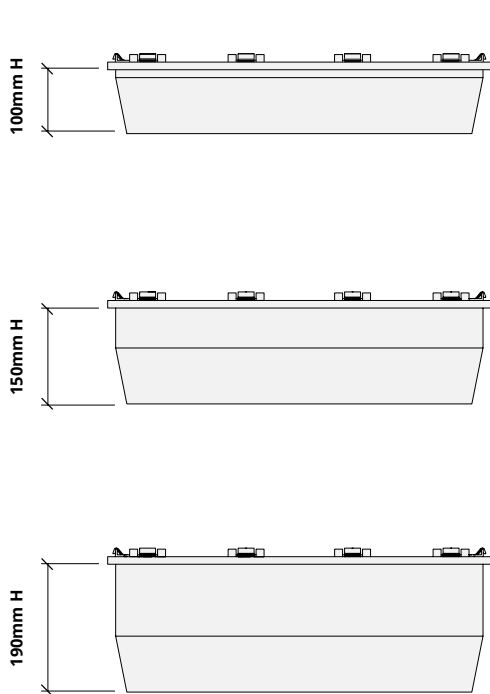Elevations




Perspectives

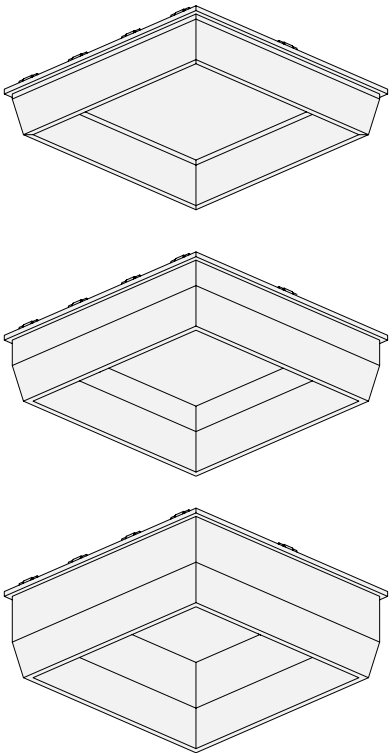

Sizes (cont.)



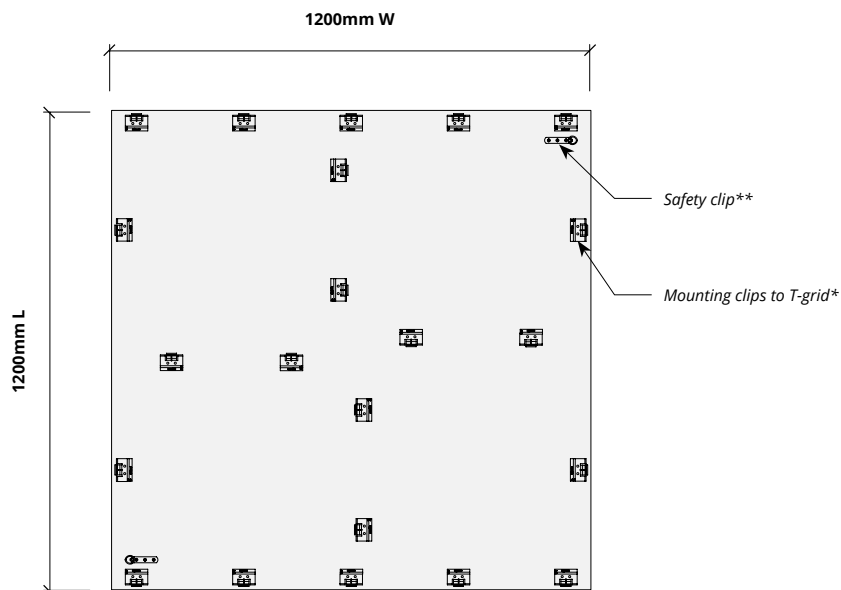
Plan






*Clip spacing may differ. Product ships assembled.

**Safety cable comes standard on all Recess product lines. See installation guides for additional details.

Elevations



Perspectives

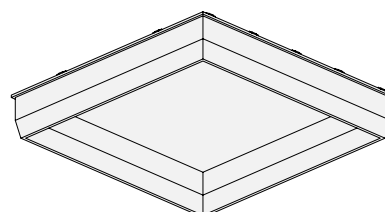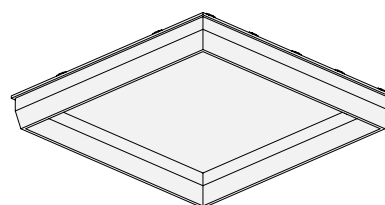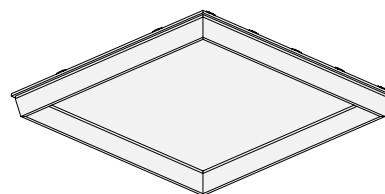

For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026

How to Specify

1. Choose Sizes

2. Choose Colorways

Select desired height and grid size.

1. Choose Sizes

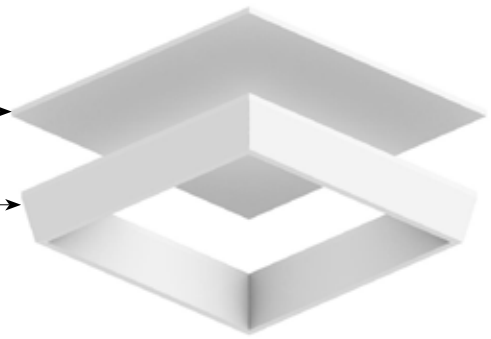
2. Choose Colorway

Select one colorway for your slats and one colorway for your backer panel, or one colorway for both. See page 3 for colorways.

Backer panel
Select one colorway


Slat
Select one colorway

Product ships assembled.




Lighting Coordination

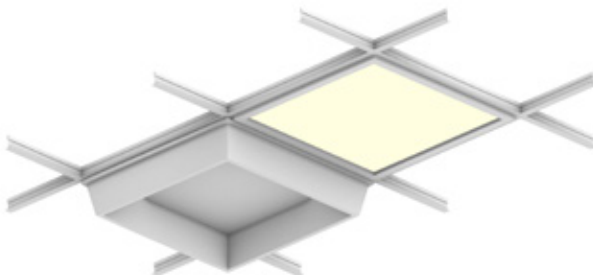
600mm x 600mm, 600mm x 1200mm Grid light




Drop pendant light

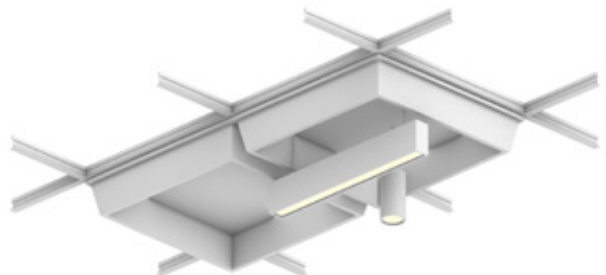

Recessed light

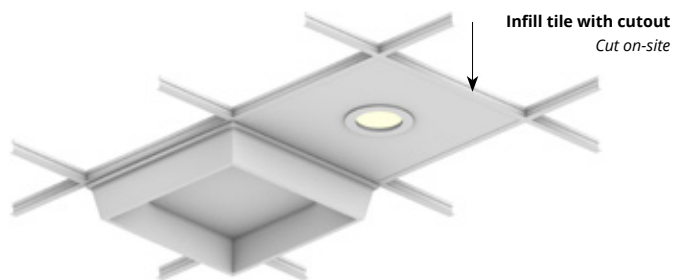

Grid mounted light (track, pendant)

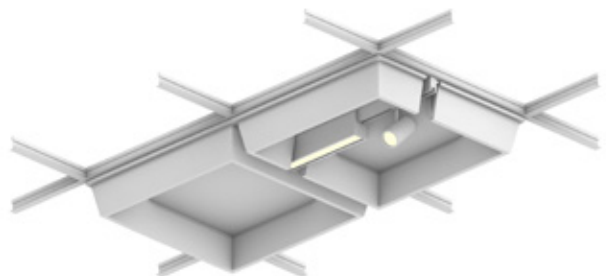


For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026

Acoustic Performance

Test Method	ASTM E795-16
Install Method	A
Rating Method	ISO 11654-1997
Test Results	Product testing in progress

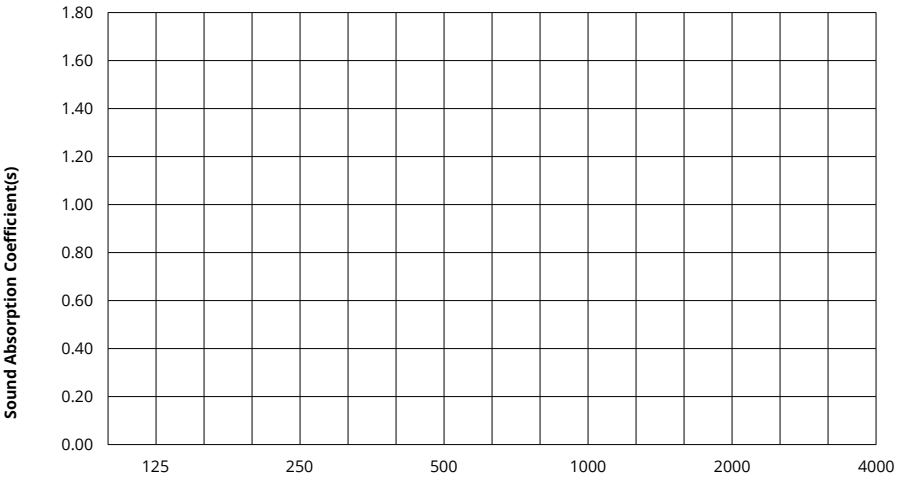

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	Pending Product Testing							

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com.au or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026