



## Recess, Chamfer Ceiling Frames

WoodGrain Collection

Chamfer ceiling frames boast a sleek angled edge and a lightweight design, making them easy to install in any space. With a variety of sizes and a wide selection of Premier Collection colors, they offer exceptional design versatility. Elevate any environment with enhanced texture, superior sound management, and striking visual appeal.

## Specifications

|                          |                          |                          |                                        |
|--------------------------|--------------------------|--------------------------|----------------------------------------|
| <b>Surface</b>           | Ceiling                  |                          |                                        |
| <b>Material</b>          | FilaSorb™ polyester felt |                          |                                        |
| <b>Weight</b>            | 2400gsm                  |                          |                                        |
| <b>Standard Sizes</b>    | <b>Thickness</b>         | <b>Height</b>            | <b>Width x Length</b>                  |
|                          | 25mm T                   | 100,150,<br>190mm H      | 600mm W x 600mm L<br>1200mmW x 1200mmL |
| <b>Compatible T-grid</b> | <b>Type</b>              | <b>Layout</b>            |                                        |
|                          | 14mm Flat                | Standard 600mm x 600mm   |                                        |
|                          | 24mm Flat                | Standard 1200mm x 1200mm |                                        |



Recess, Chamfer Ceiling Frame in Fumed Oak

## Technical

|                       |                                                                                                |
|-----------------------|------------------------------------------------------------------------------------------------|
| <b>NRC Rating</b>     | Pending product testing                                                                        |
| <b>Fire Test</b>      | Pending product testing                                                                        |
| <b>Water Sorption</b> | ASTM C1104-2019 (A Modified)<br>Water sorbed by weight: 0.20%<br>(based on a 12mm thick panel) |
| <b>Colorfastness</b>  | ISO 105-B02, 6-7                                                                               |

## Details

|                  |                                                |
|------------------|------------------------------------------------|
| <b>Lead Time</b> | Refer to Product Lead Time Matrix              |
| <b>Origin</b>    | Australia                                      |
| <b>Warranty</b>  | Product: 20 years*<br>Colorfastness: 20 years* |

\* Conditions apply

## Environmental

|                           |                                                                                                         |
|---------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Recycled Content</b>   | Minimum 60%                                                                                             |
| <b>Energy</b>             | Generated using 40% solar energy                                                                        |
| <b>Indoor Air Quality</b> | VOC less than/equal to 0.5mg/m3                                                                         |
| <b>Recyclable</b>         | 100%*                                                                                                   |
| <b>Certifications</b>     | Declare Certification - LBC Red List Free<br>(third-party verified)<br>SCS Global Indoor Advantage Gold |

\* PET is recyclable through participating partners



For questions or additional product information,  
visit [acoufelt.com.au](https://acoufelt.com.au) or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026

# Colorways

## WOODGRAIN



Picket Fence  
WQ01




Loft  
WQ06



White Elm  
WQ07



Lyed Larch  
WQ30




White Oak  
WQ13



Baltic Birch  
WQ12




Knotty Spruce  
WQ29




French Bobbin  
WQ08



Boat Shed  
WQ02



Nordic Plank  
WQ15




Boardwalk  
WQ10




Mocha Legno  
WQ25



Mountain Lodge  
WQ24




Wine Barrel  
WQ03




Log Cabin  
WQ04




Natural Oak  
WQ16



Woodland Fog  
WQ22




Driftwood  
WQ21




Weathered Slate  
WQ14




Petrified Ash  
WQ23




Antique Chest  
WQ11



European Larch  
WQ17



Fumed Oak  
WQ19



Teak  
WQ18




Charred Larch  
WQ09



Shadow Oak  
WQ28




Barn Door  
WQ05



Black Walnut  
WQ20



Scorched Timber  
WQ26



Espresso Oak  
WQ27




For questions or additional product information,  
visit [acoufelt.com.au](https://acoufelt.com.au) or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026

Sizes


| Standard Sizes | Thickness | Height            | Width x Length                           | Compatible T-grid | Type                   | Layout                                             |
|----------------|-----------|-------------------|------------------------------------------|-------------------|------------------------|----------------------------------------------------|
|                | 25mm T    | 100, 150, 190mm H | 600mm W x 600mm L<br>1200mm W x 1200mm L |                   | 14mm Flat<br>24mm Flat | Standard 600mm x 600mm<br>Standard 1200mm x 1200mm |

Plan

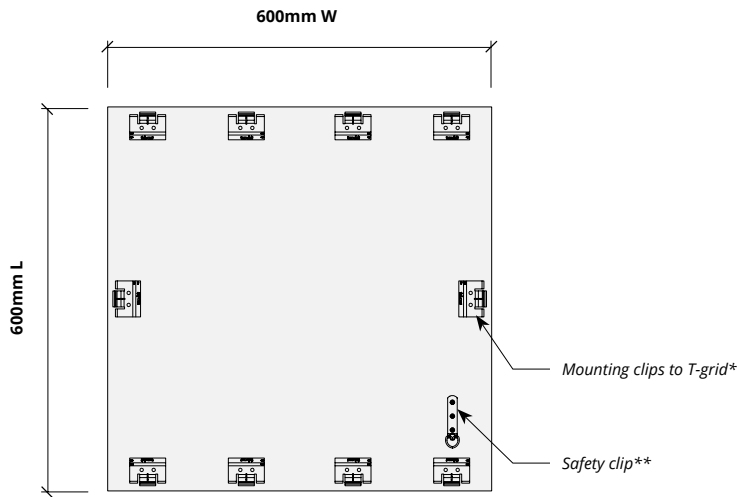


*\*Clip spacing may differ. Product ships assembled.*  
*\*\*Safety cable comes standard on all Recess product lines. See installation guides for additional details.*

Elevations

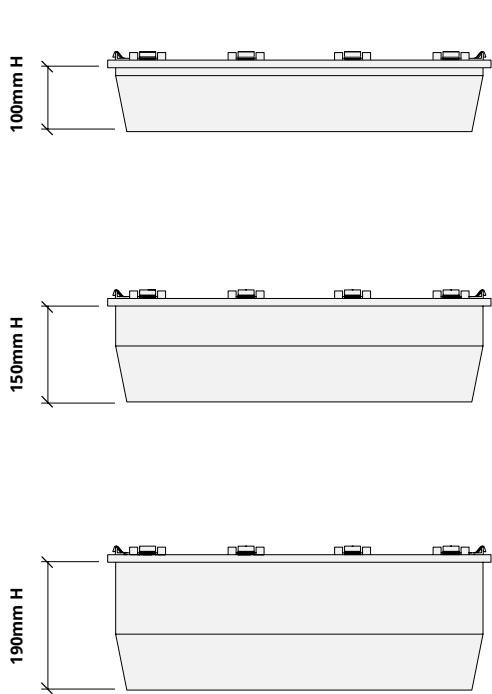


Perspectives

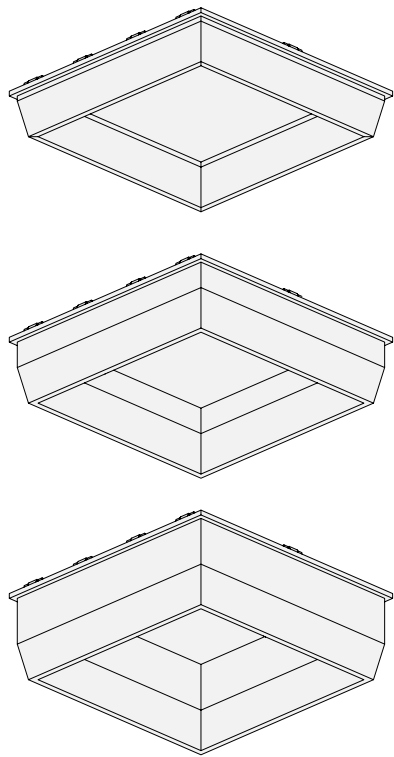

## Sizes (cont.)




### Plan

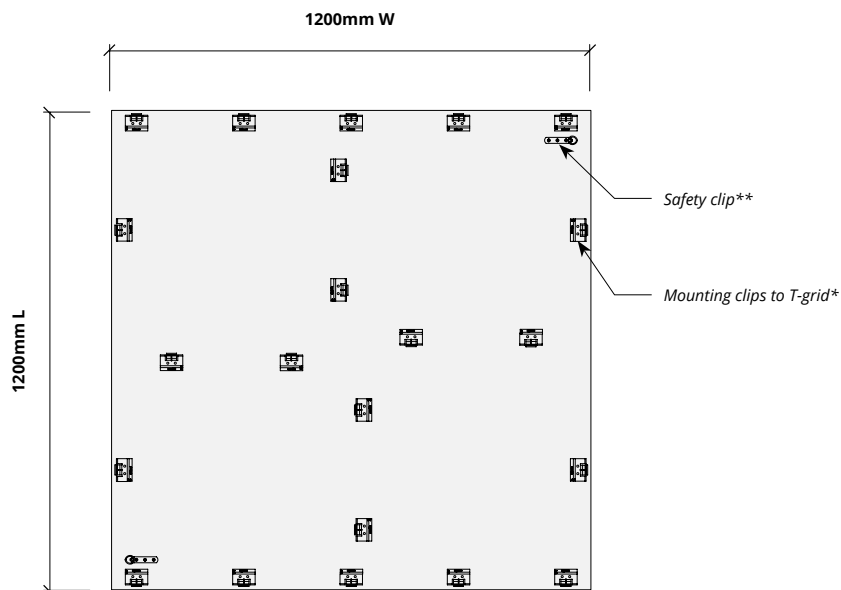




\*Clip spacing may differ. Product ships assembled.

\*\*Safety cable comes standard on all Recess product lines. See installation guides for additional details.

### Elevations



### Perspectives

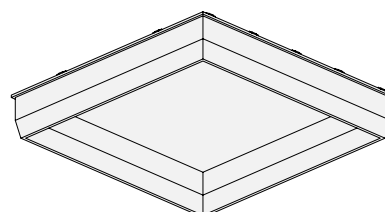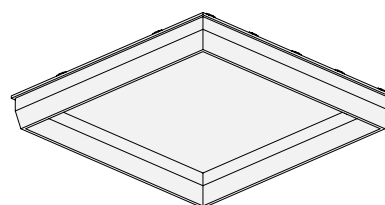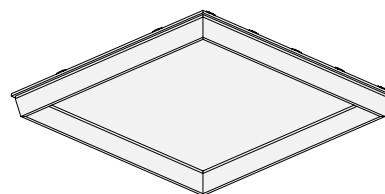

For questions or additional product information,  
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026

# How to Specify

## 1. Choose Sizes

## 2. Choose Colorways

Select desired height and grid size.


## 1. Choose Sizes

## 2. Choose Colorway

Select one colorway for your slats and one colorway for your backer panel, or one colorway for both. See page 3 for colorways.

**Backer panel**  
Select one colorway


**Slat**  
Select one colorway

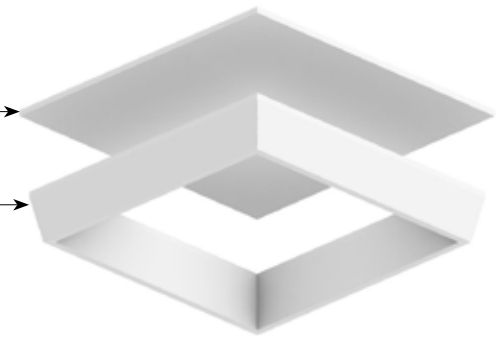


*Product ships assembled.*

# Lighting Coordination


## 600mm x 600mm, 600mm x 1200mm Grid light

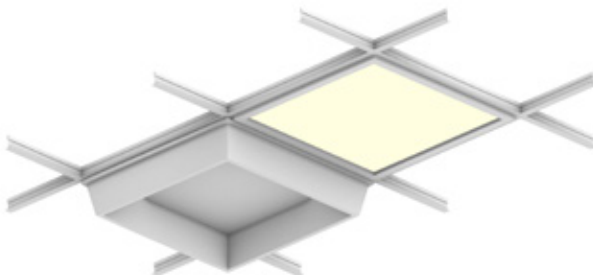


## Drop pendant light

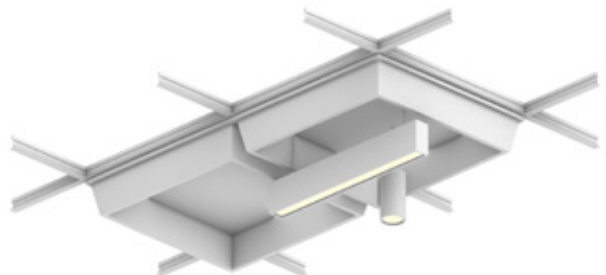

## Recessed light

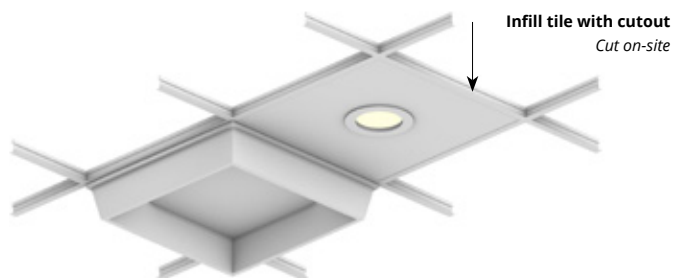

## Grid mounted light (track, pendant)

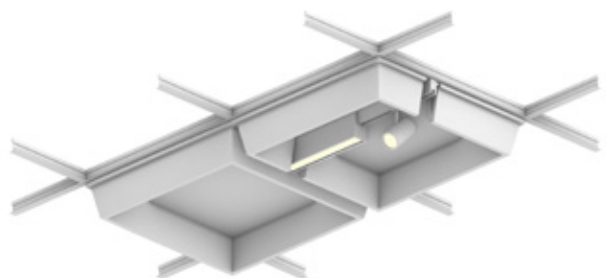


For questions or additional product information,  
visit [acoufelt.com.au](https://acoufelt.com.au) or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026

# Acoustic Performance

|                |                             |
|----------------|-----------------------------|
| Test Method    | ASTM E795-16                |
| Install Method | A                           |
| Rating Method  | ISO 11654-1997              |
| Test Results   | Product testing in progress |

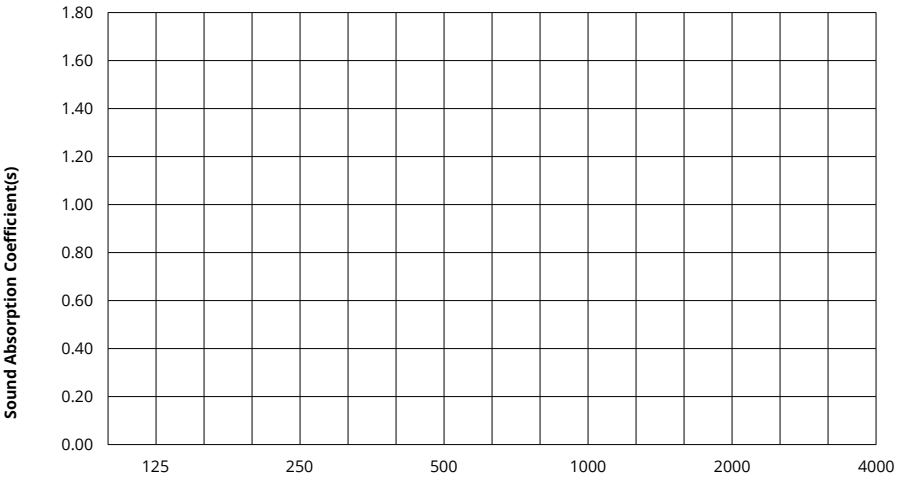

|  | Frequency f (Hz)        | 125 | 250 | 500 | 1000 | 2000 | 4000 | NRC |
|--|-------------------------|-----|-----|-----|------|------|------|-----|
|  | Pending Product Testing |     |     |     |      |      |      |     |

## What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

*Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.*

 For questions or additional product information, visit [acoufelt.com.au](https://acoufelt.com.au) or call 1800 626 462

Recess, Chamfer Ceiling Frames | June 2026