


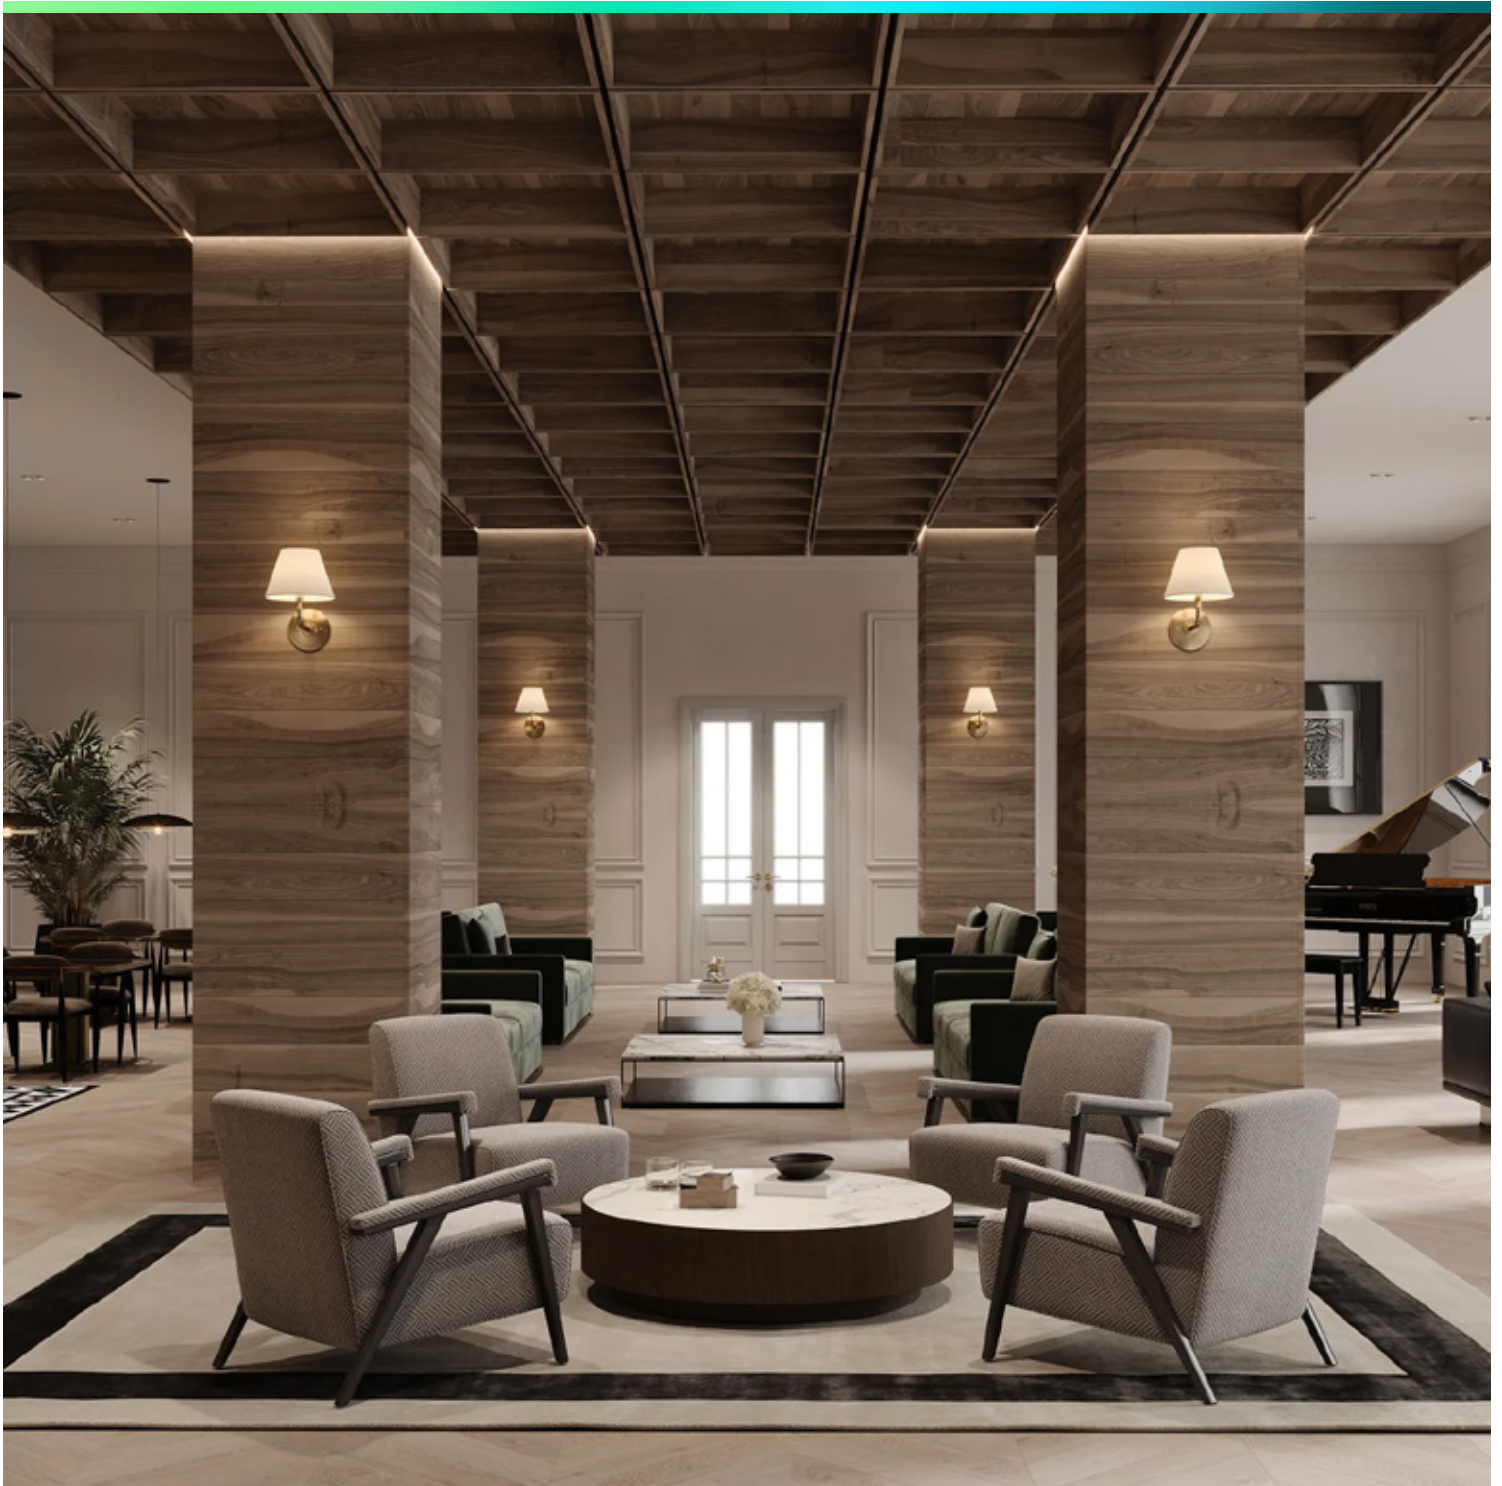

Recess, Waffle Ceiling Frames

WoodGrain Collection

Recess, Waffle ceiling frames are designed to use less material, making them lightweight and easy to install in any location. With a variety of product sizes and Premier Collection colors available, Waffle provides exceptional creative freedom, allowing you to add texture, manage sound, and enhance the visual appeal of any space.

Specifications

Surface	Ceiling		
Material	FilaSorb™ polyester felt		
Weight	2400gsm		
Standard Sizes	Thickness	Height	Width x Length
	25mm T	100, 150, 190mm H	600mmW x 600mmL 1200mmW x 1200mmL
Compatible T-grid	Type	Layout	
	14mm Flat	Standard 600mm x 600mm	
	25mm Flat	Standard 1200mm x 1200mm	



Recess, Waffle Ceiling Frame in Black Walnut

Technical

NRC Rating	Pending product testing
Fire Test	Test Result Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Recess, Waffle Ceiling Frames | May 2026

Colorways

WOODGRAIN



Picket Fence
WQ01




Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30




White Oak
WQ13



Baltic Birch
WQ12




Knotty Spruce
WQ29




French Bobbin
WQ08



Boat Shed
WQ02



Nordic Plank
WQ15




Boardwalk
WQ10




Mocha Legno
WQ25



Mountain Lodge
WQ24




Wine Barrel
WQ03



Log Cabin
WQ04



Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21




Weathered Slate
WQ14




Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18




Charred Larch
WQ09



Shadow Oak
WQ28




Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27




For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Recess, Waffle Ceiling Frames | May 2026

Sizes

Standard Sizes	Thickness	Height	Width x Length	Compatible T-grid	Type	Layout
	25mm T	100, 150, 190mm H	600mm W x 600mm L 1200mm W x 1200mm L		14mm Flat 25mm Flat	Standard 600mm x 600mm Standard 1200mm x 1200mm

Plans

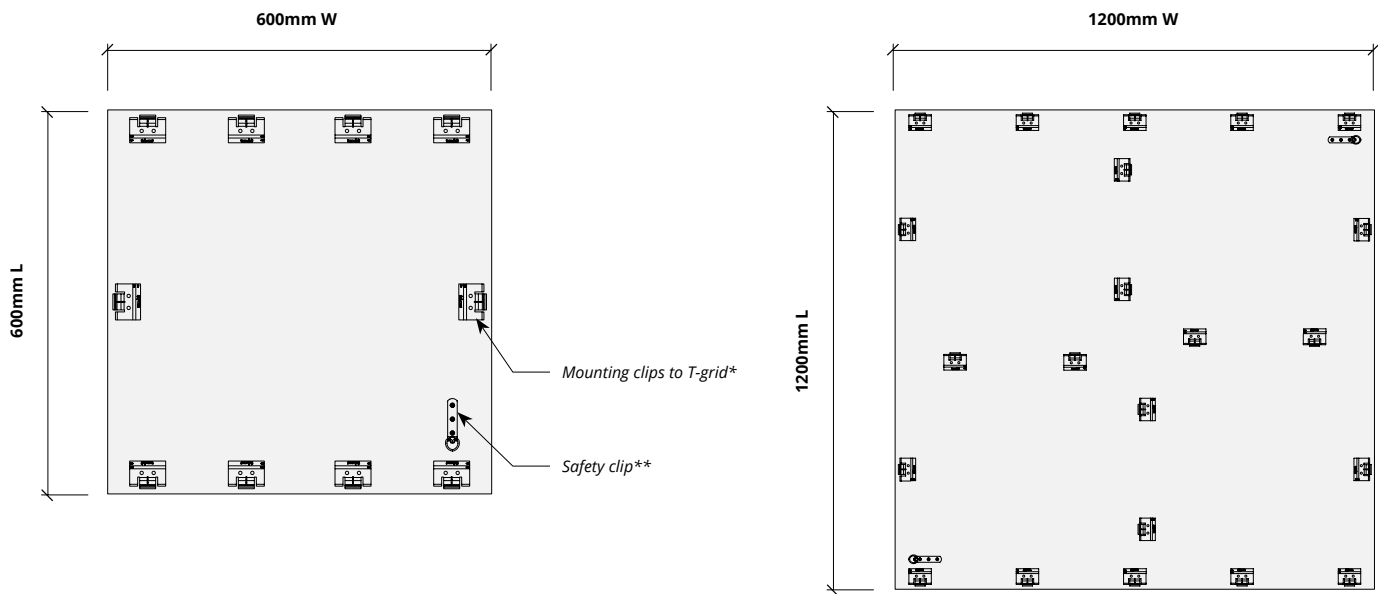

*Clip spacing may differ. Product ships assembled.
**Safety cable comes standard on all Recess product lines. See installation guides for additional details.

Elevations



Perspectives



How to Specify

1. Choose Sizes

2. Choose Colorways

Select desired height and grid size.

1. Choose Sizes

2. Choose Colorway

Select one colorway for your slats and one colorway for your backer panel, or one colorway for both. See page 3 for colorways.


Backer panel
Select one colorway

Slat
Select one colorway


Product ships assembled.

Lighting Coordination


600mm x 600mm, 600mm x 1200mm Grid light

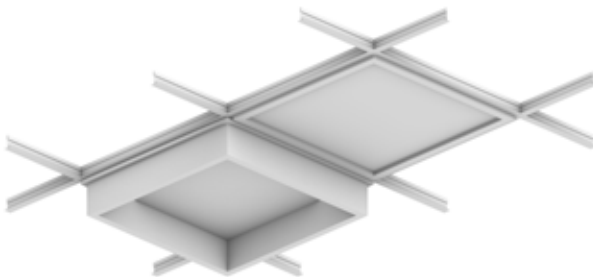


Drop pendant light

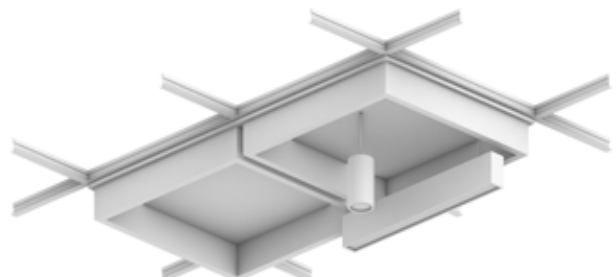

Recessed light

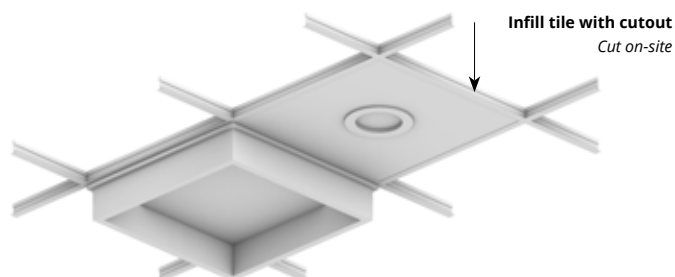

Grid mounted light (track, pendant)

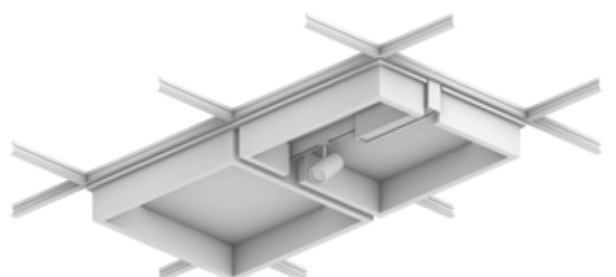


For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Recess, Waffle Ceiling Frames | May 2026

Acoustic Performance

Test Method	ASTM E795-16
Install Method	A
Rating Method	ISO 11654-1997
Test Results	Product testing in progress

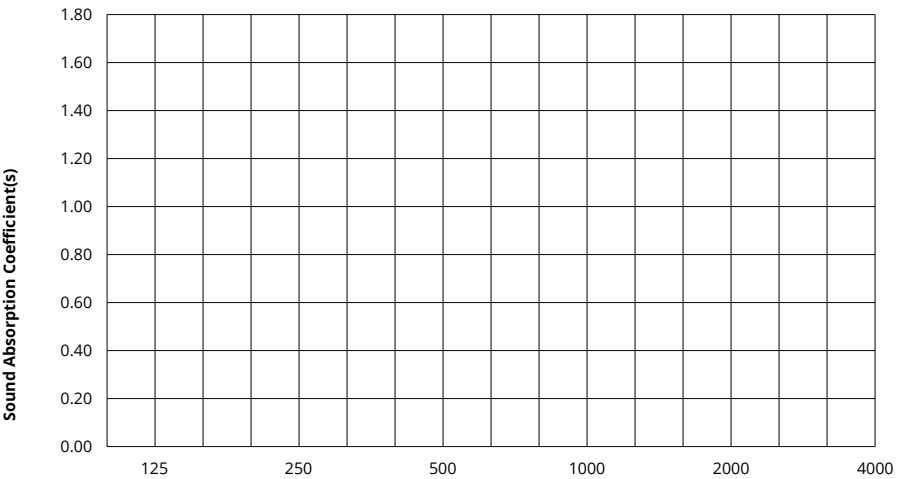

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com.au or call 1800 626 462

Recess, Waffle Ceiling Frames | May 2026