

acouflor
making quiet



Ridges SoftStep™
Carpet Tiles

Specifications

Application	Floor
Backing	Felt polyester + fibreglass
Pile content	Solution dyed nylon
Style	Multi-level textured loop pile
Recycled content	Backing made from >90% recycled PET
Dimensions	500 x 1000mm
Thickness	9.5mm +/- 10%
Tiles per box	15 tiles (7.5m²)
Classification	Heavy Duty Commercial

*conditions apply

Guarantees

Wear warranty	15 years*
Castor chair proof	10 years*
Anti-static	Lifetime*
Colorfastness warranty	20 years*
Impervious	15 years

*conditions apply

Shipping



QuickShip

QuickShip products can be despatched within **24 hours**.

Technical Data

Fire test method	AS/ISO 9239.1-2003
Critical heat flux	Mean result 7.0kW/m²
Smoke deviation rate	Mean result 118%.min
Dimensional stability	-0.05%
Electrostatic propensity	<0.3000 kv
Thermal resistance	0.68m²K/W
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m³ or less
Colorfastness test method	ISO 105-B02
Rating	6-7
Mildew and Odour	HN 0028-2004 Determination of Mildew Growth and Odour on Trim Material. Rating = satisfactory

Sustainability



Backing made from 90% min. recycled PET



Red List Free Declare Label




ACCS, Environmental Certification Scheme Level 4 Compliant




Acoustic Performance

Test method	ASTM C423-2022: Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
Rating method	AS ISO 11654 -2002: Acoustics - Rating of sound absorption - Material and sytems
Test results	NRC 0.25 SAA 0.23

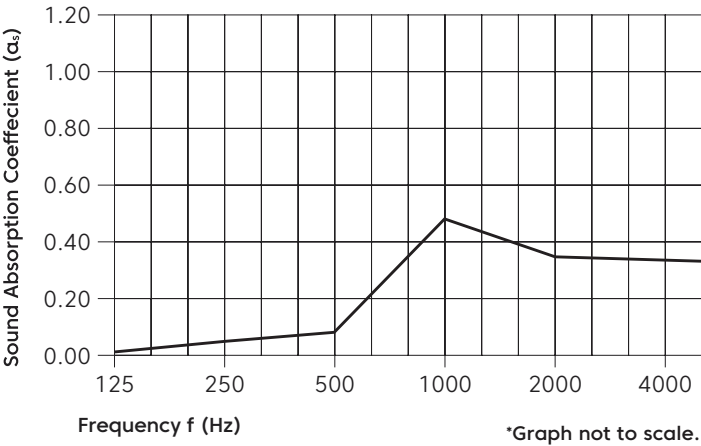


Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results. **Sound Absorption Average (SAA)** indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz

Configurations




Herringbone



Ashlar




Monolithic




Non-Directional


Colorways

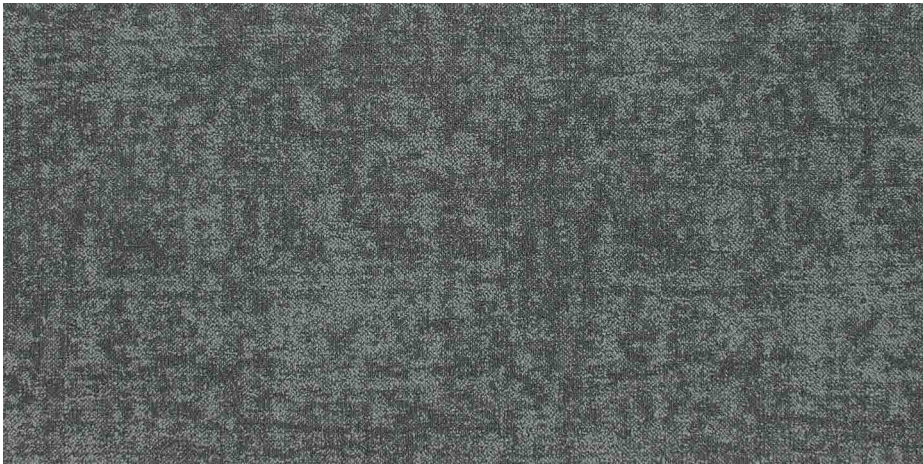


Cave – RI04

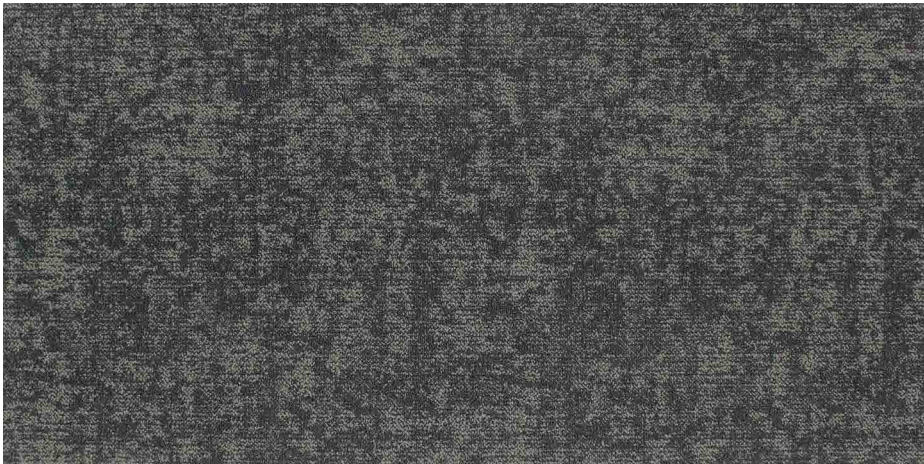


Cliff – RI05

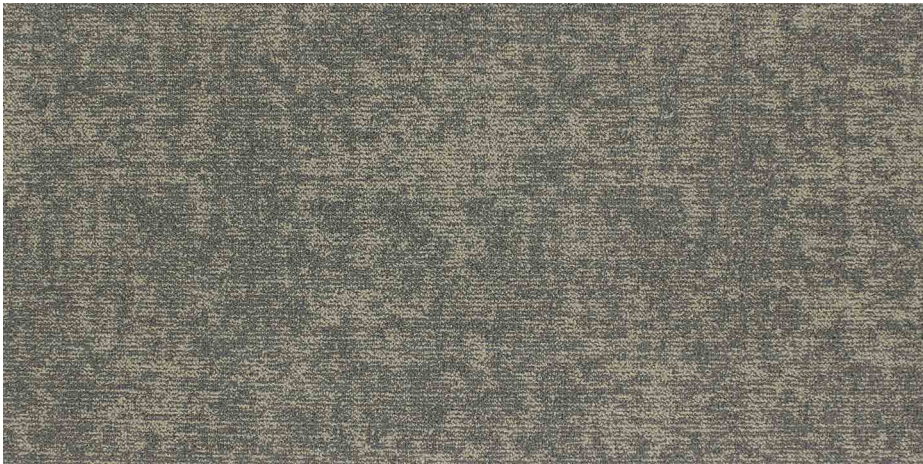

Crater – RI02

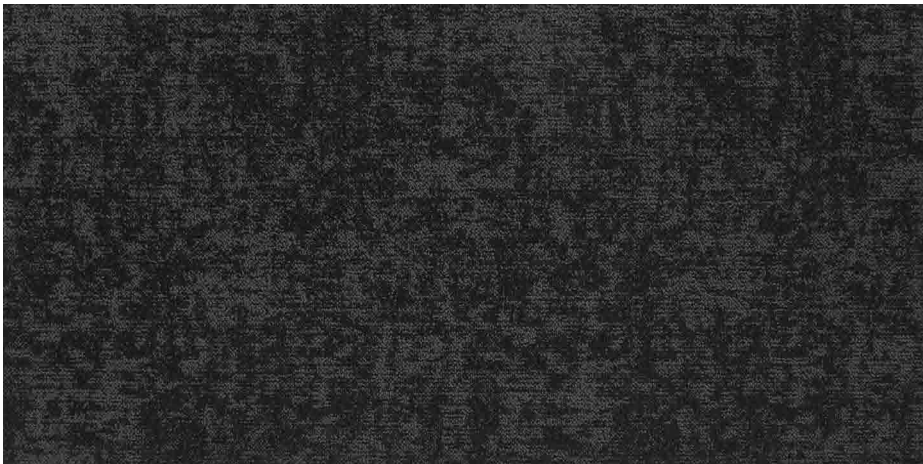


Dune – RI06

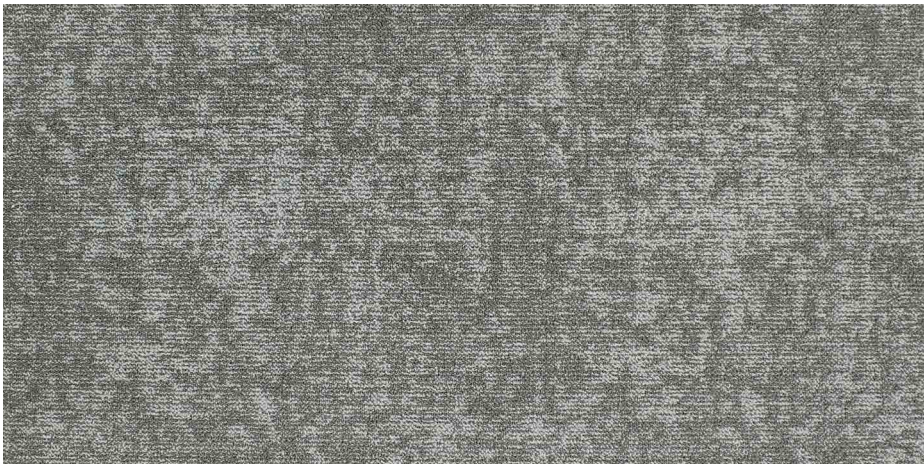


Gully – RI08



Mountain – RI01

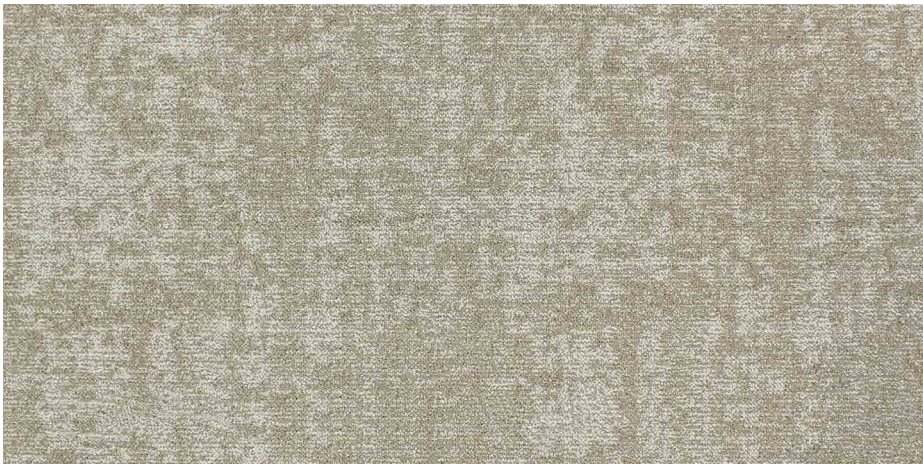

Strait – RI07

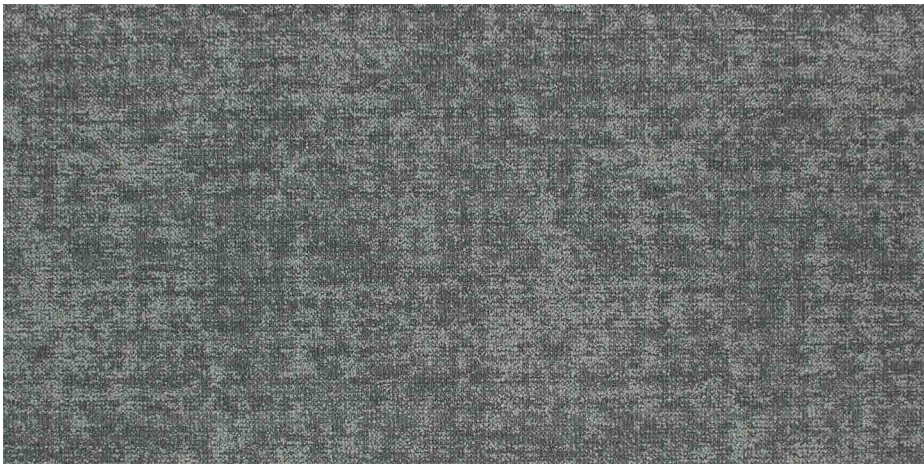

Valley – RI03