

Rooftop, Saltbox

Ceiling Clouds

Premier Collection

Rooftop ceiling clouds combine modern aesthetics with exceptional functionality. Crafted from high-quality acoustic felt and available in a range of colors, their dynamic geometric design adds depth and visual intrigue to any space.

More than just visually captivating, Rooftop Clouds are designed with angled surfaces and premium materials to deliver outstanding sound absorption, effectively reducing noise and improving acoustics. Ideal for large, open areas, these ceiling clouds provide a versatile solution that enhances the style and functionality of any environment, making a bold architectural statement.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Thickness	12mm (±10%)
Weight	2400gsm
Standard Sizes	1118mm W x 1118mm L x 51mm H 1118mm W x 2438mm L x 51mm H



Rooftop, Saltbox Ceiling Cloud in Flint, Turmeric and Sea Salt

Technical

NRC Rating	0.85, 200mm air gap* 0.80, 400mm air gap*
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

** Test results available upon request*

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

** PET is recyclable through participating partners*

© 2026 Acoufelt. All rights reserved.

Colorways

White
WH12


Milkyway
MI74


Ivory
IV11

Pearl
PE21


Valentine
VA70


Quartz
QU67


Stonewash
ST72


Sea Salt
SE57


Platinum
PL04


Almond
AL55


Pistachio
PI25


Turmeric
TU60


Flamingo
FL61


Amethyst
AM69


Periwinkle
PE23


Peacock
PE20


Metal
ME03


Mushroom
MU75


Celery
CE65


Wheat
WH68


Peach
PE19


Lilac
LI13


Marine
MA15


Sencha
SE58


Grey
GR02


Umber
UM54


Wasabi
WA29


Popcorn
PO26


Currant
CU59


Berry
BE06


Azure
AZ05


Oregano
OR18


Charcoal
CH01


Walnut
WA56


Eucalyptus
EU71


Carrot
CA08


Loganberry
LO77


Granite
GR62


Denim
DE09


Kale
KA12

Piano Black
PI24

Slate
SL27

Nori
NO76

Peppercorn
PE22

Shiraz
SH63

Flint
FL64

Midnight
MI16


For questions or additional product information,
visit **acoufelt.com.au or call 1800 626 462**


© 2026 Acoufelt. All rights reserved.

Sizes


Standard Sizes	1118mm W x 1118mm L x 51mm H 1118mm W x 2438mm L x 51mm H
Thickness	12mm (±10%)

Plan

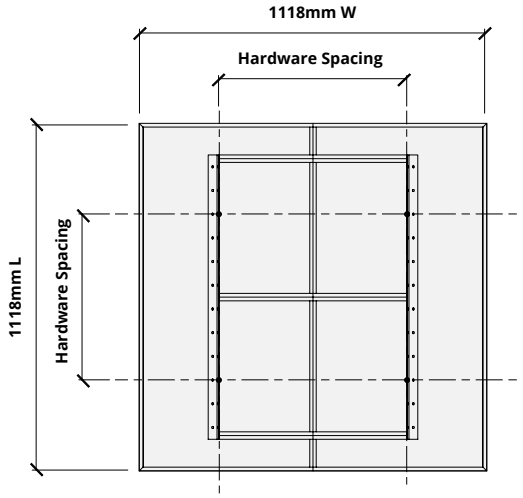


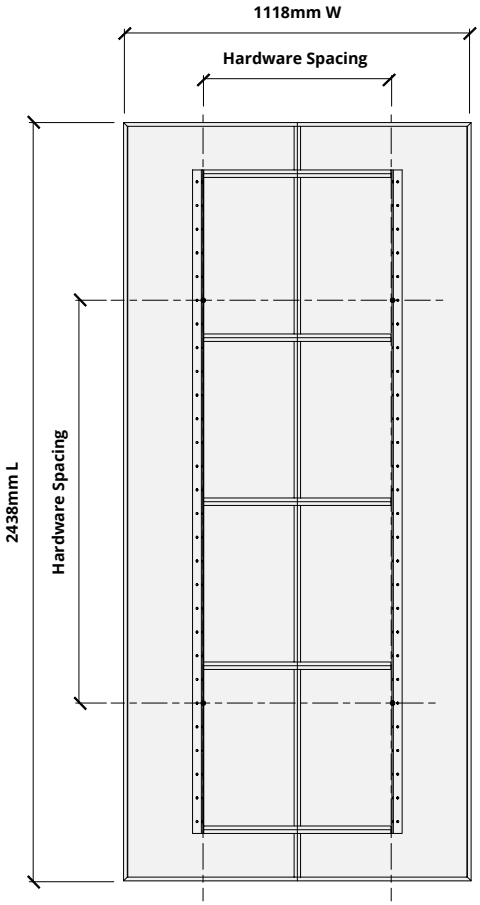

Elevation

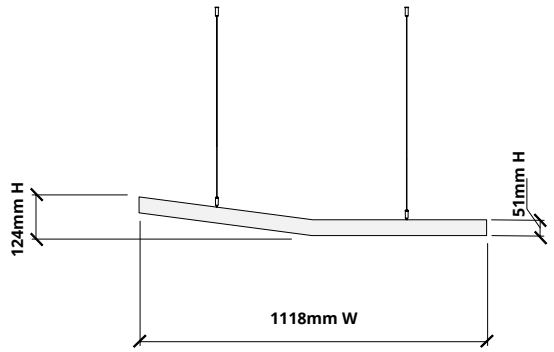


Perspective

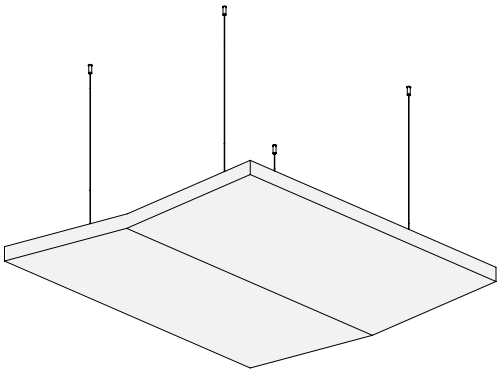


© 2026 Acoufelt. All rights reserved.

Hardware Spacing

1118mm W	610mm on center spacing
1118mm L	838mm on center spacing
2438mm L	2057mm on center spacing

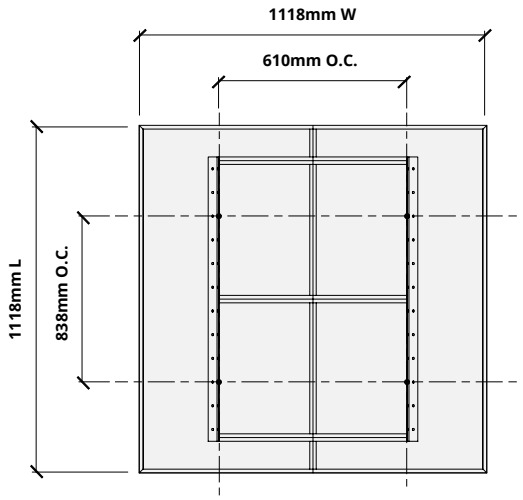


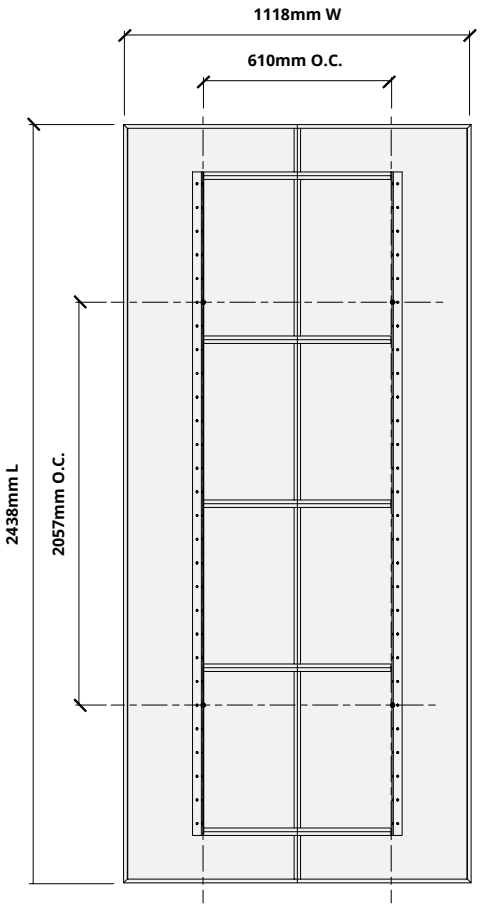


© 2026 Acoufelt. All rights reserved.

Mounting Methods


Cable

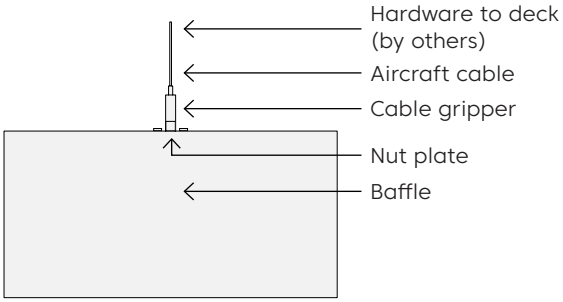

Cable to deck

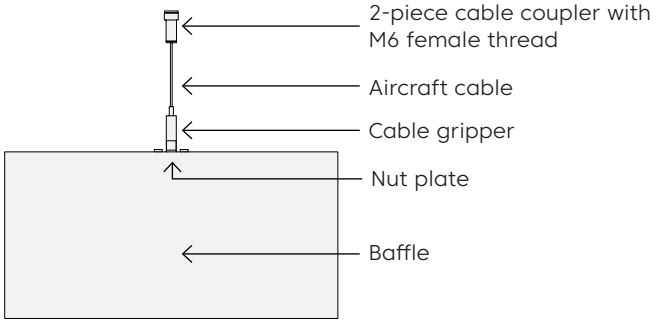


Threaded rod

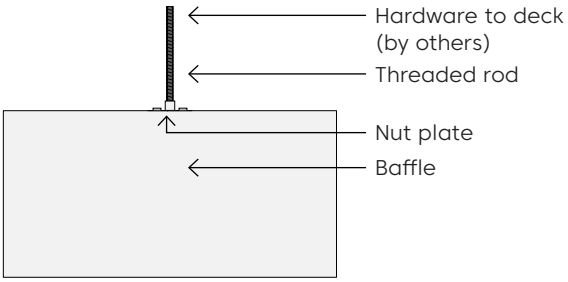

© 2026 Acoufelt. All rights reserved.

Acoustic Performance

Test Method	ISO 11654-2002
Install Method	E200, E400
Rating Method	ASTM C423-09a
Test Results	NRC 0.85, 200mm air gap SAA 0.86, 200mm air gap NRC 0.80, 400mm air gap SAA 0.83, 400mm air gap

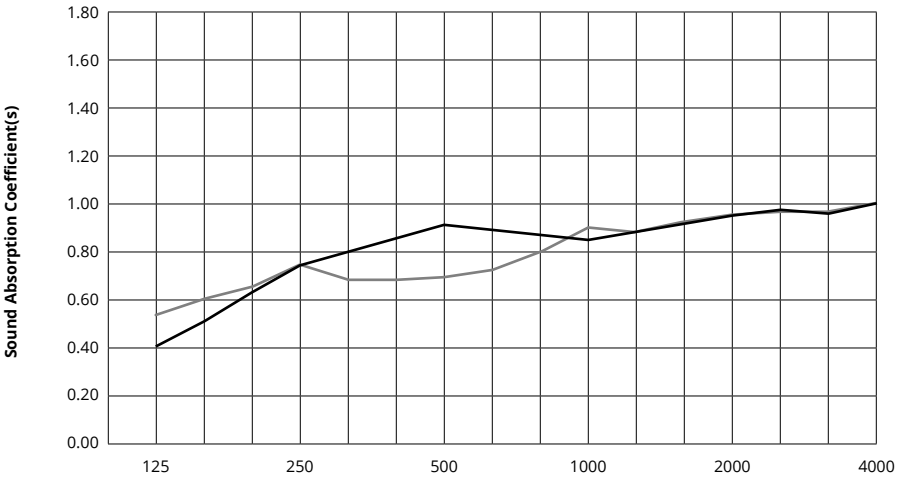

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	12mm, 200mm air gap	0.40	0.75	0.90	0.85	0.95	1.00	0.85
	12mm, 400mm air gap	0.55	0.75	0.70	0.90	0.95	1.00	0.80

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

© 2026 Acoufelt. All rights reserved.