

Seam Wall Panels

Specifications

Application Wall

Composition 100% polyester

Material FilaSorb™

Recycled content 60% min. rPET

 Thickness
 12mm, 24mm +/- 10%

 Weight
 12mm - 2400gsm

24mm - 4800gsm

Dimensions Width – 305 – 1220mm

Depth - 50 & 55mm Height - 610 - 2800mm

Sustainability



Made from 60% min. recycled content



Declare Red List Free (3rd Party Verified)



Generated using 40% solar energy



Recyclable at end of lifespan



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)











Technical Data

12mm	
Fire test method	EN 13501-1: 2019
Classification	B-s1, d0
Water vapour sorption method	ASTM C1104-2019 (Procedure A Modified)
Water sorbed by weight	0.20% (results based on a

12mm thick panel)

24mm	
Fire test	Pending
12 & 24mm	
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m³
Colourfastness test method	ISO 105-B02
Rating	6-7

Guarantees

Lead Time6-8 weeksOriginUnited KingdomWarranty against defects20 years*Colourfastness warranty20 years**conditions apply

Acoustic Performance

Test method

<u>12mm</u> ASTM C423-09a: Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method

<u>**24mm**</u> ASTM C423-17: Standard test method for sound absorption and sound absorption coefficients by the reverberation room method

Installation method

Mounting method A

Rating method

AS ISO 11654 -2002: Acoustics - rating of sound absorption - material and sytems

Test results

12mm


no air gap - 0.45 NRC | 0.25 (H) aw no air gap, Class E

12mm air gap - 0.54 NRC | 0.35 (MH) aw 12mm air gap, Class D 20mm air gap - 0.64 NRC | 0.40 (MH) aw 20mm air gap, Class D

*results are for materials only

24mm

no air gap - 0.60 NRC | 0.50 (LH) aw no air gap, Class D $_{\ast}$ results are for materials only

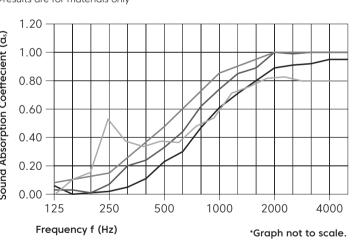

Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
12mm - a₅no air gap	0.06	0.02	0.23	0.61	0.89	0.95	0.45	Class E
12mm - α _s 12mm air gap	0.03	0.14	0.33	0.74	1.00	1.00	0.54	Class D
12mm - α _s 20mm air gap	0.05	0.16	0.48	0.85	1.00	1.00	0.64	Class D
24mm	0.02	0.57	0.41	0.58	0.87	0.85	0.60	Class D

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results.




Seam Designs


Sizes


Width	305 – 1220mm	
Depth	Block – 50mm Igloo – 55mm	
Height	610 – 2800mm	

Perspective

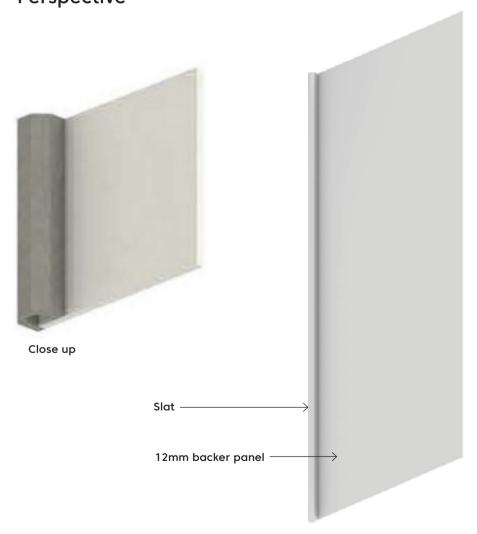



Block

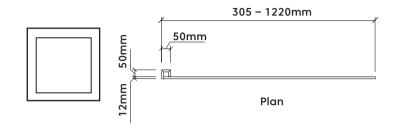

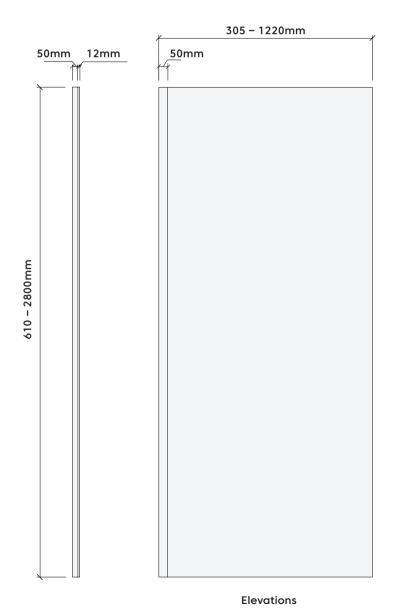

Igloo

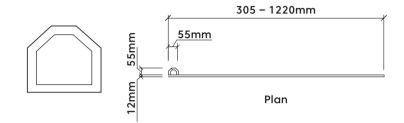

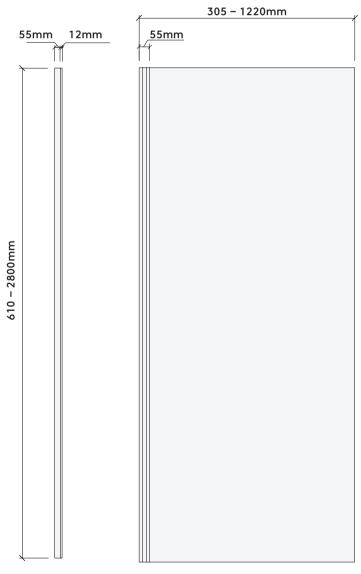

Elevations

Lievations

FilaSorbTM Colourways



Can't find a colour?

We are constantly updating our palette, which includes adding and discontinuing certain colour lines. If you can't find the colour you are looking for, please contact us with your colour request, as we may still have stock available.



Mounting Methods

Construction Adhesive

