

Shapes

Product Detail

Technical Data

| Application Composition Material Recycled content Weight | Wall 100% polyester FilaSorb™ 60% min 2400gsm |
|--|--|
| Thickness | 12mm +/- 10% |
| Dimensions | Rectangle – 850 x 400mm Right Triangle – 300 x 400mm Hexagon – 315 x 400mm Diamond – 350 x 600mm Scale – 400 x 317mm Ogee – 315 x 400mm |
| Qty per carton | Rectangle – 10 Right Triangle – 54 Hexagon – 24 Diamond – 21 Scale – 32 Ogee – 36 |

Sustainability





Generated using 40% solar energy



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)



Red List Free

Declare Label

Recyclable at

end-of-life

(3rd Party Verified)

| Fire test method | EN 13501-1: 2019 |
|------------------------------|--|
| Classification | B-s1, d0 |
| Water vapour sorption method | ASTM C1104-2019 (Procedure A Modified) |
| Water sorbed by weight | 0.20% (results based on a 12mm thick panel) |
| Total VOC test method | SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017 |
| Total VOC result | ≤ 0.5mg/m ³ |
| Colourfastness test method | ISO 105-B02 |
| Rating | 6-7 |

Guarantees

| Lead time | 6-8 weeks | | |
|--------------------------|-------------------|--|--|
| Origin | United Kingd | | |
| Warranty against defects | 20 years* | | |
| Colourfastness warranty | 20 years* | | |
| | *conditions apply | | |

dom

Test method


Installation method

Mounting method A

Rating method and sytems

Test results 12mm

¥

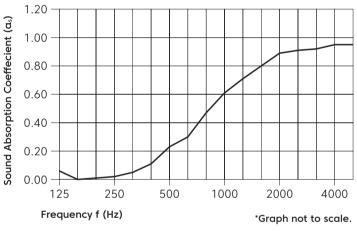

| Frequency (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 | NRC | Class Rating |
|-------------------|------|------|------|------|------|------|------|--------------|
| a₅no air gap | 0.06 | 0.02 | 0.23 | 0.61 | 0.89 | 0.95 | 0.45 | Class E |

could alter the results.

Acoustic Performance

ASTM C423-09a: Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method


AS ISO 11654 -2002: Acoustics - rating of sound absorption - material

no air gap - 0.45 NRC | 0.25 (H) aw no air gap, Class E

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product



Designs

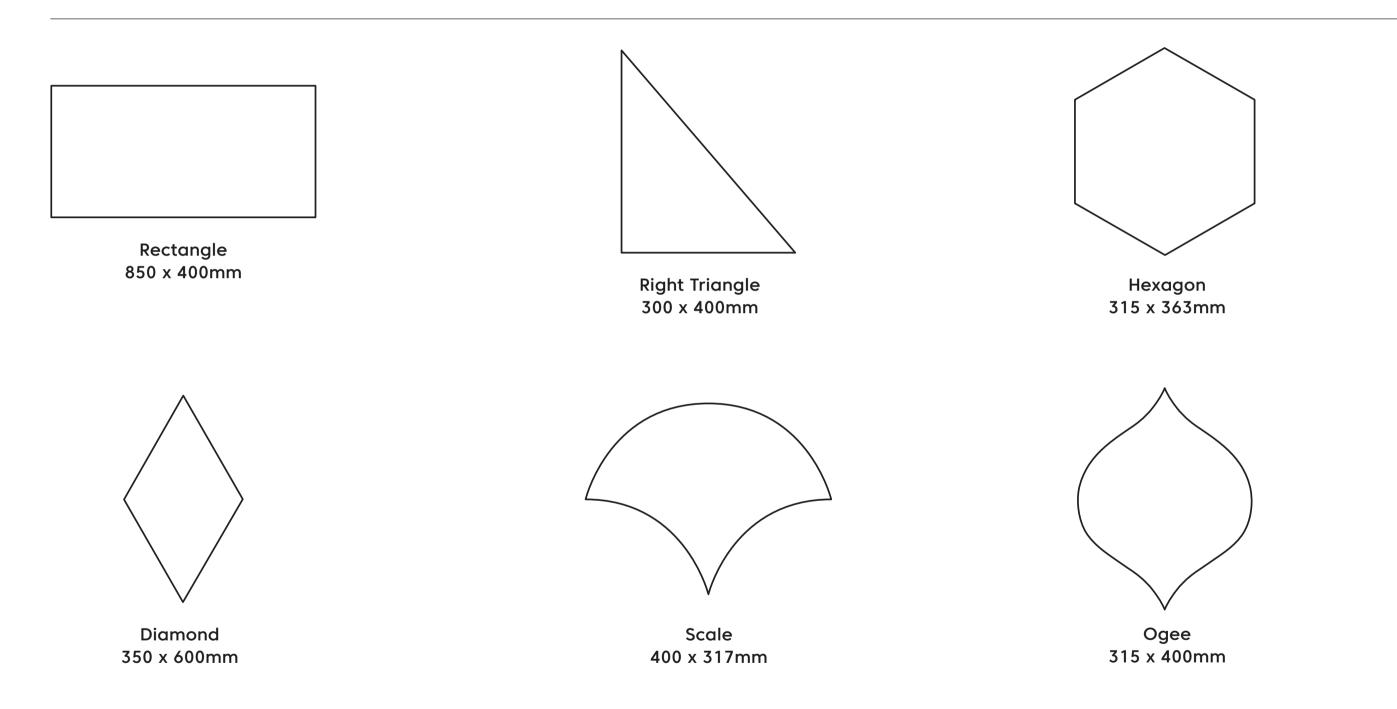



FilaSorbTM Colourways



Can't find a colour?

We are constantly updating our palette, which includes adding and discontinuing certain colour lines. If you can't find the colour you are looking for, please contact us with your colour request, as we may still have stock available.





Oregano OR18



Azur AZ05





Platinum PL04



Sencha SE58



Marine MA15



Milkyway MI74



Mounting Methods

Construction Adhesive

