


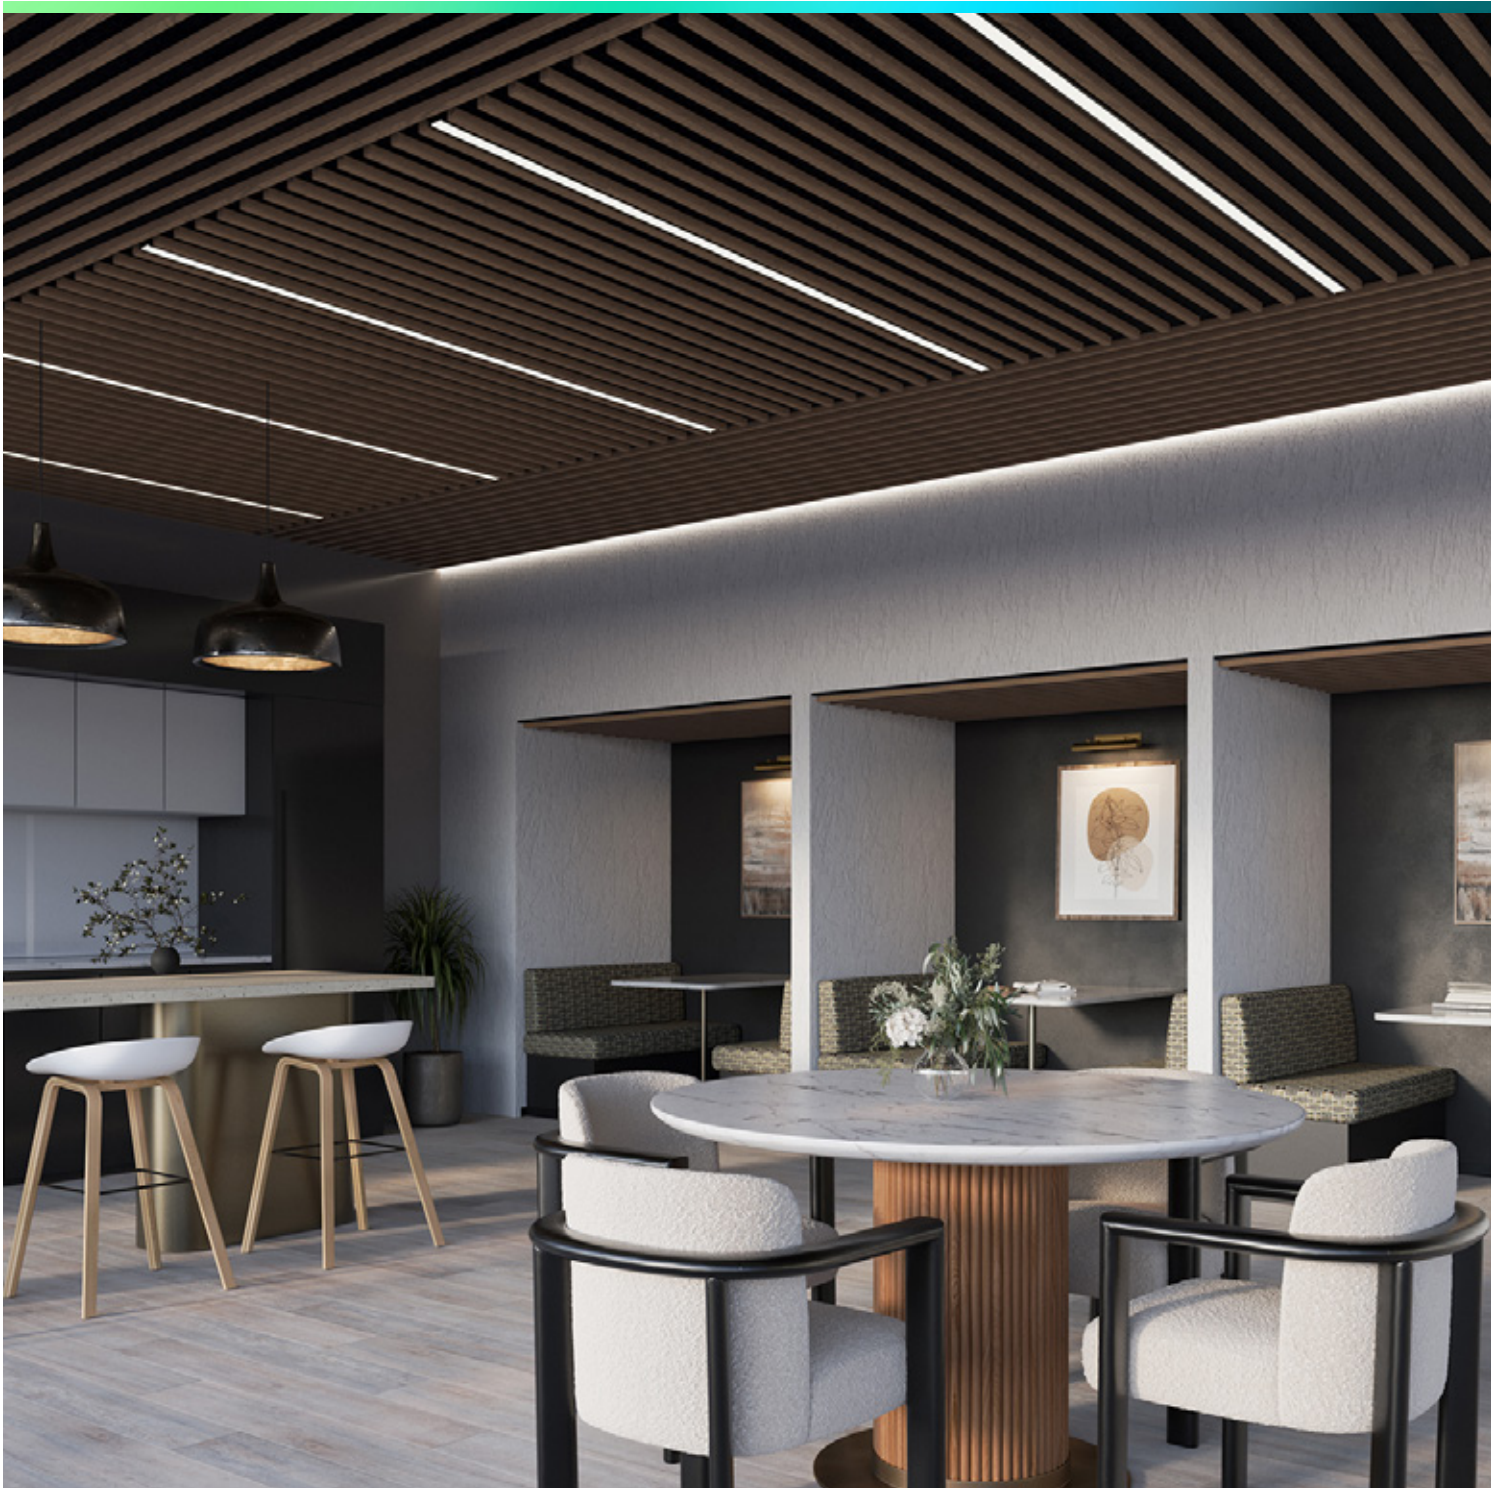


SofteningUp, Plateau Ceiling Frames

WoodGrain Collection

SofteningUp™ modular ceiling frames bring warmth and comfort to any space. The Plateau design features SofteningUp's most compact slat profile, combining clean, linear design with exceptional acoustic performance. Each tile offers discreet yet effective sound absorption and integrates effortlessly into standard T-grid drop-ceiling systems. Available in a variety of sizes and woodgrain prints, Plateau allows for creative flexibility and personalized design expression.

Specifications

Surface	Ceiling	
Material	FilaSorb™ polyester felt	
Weight	2400gsm	
Standard Sizes	Height: 25mm, 51mm H Thickness: 25mm up to 127mm T Backer Panels: 610mm W x 610mm L 610mm W x 1220mm L	
Compatible T-grid	Type 14mm Flat 24mm Flat	Layout Standard 610mm x 610mm Standard 610mm x 610mm

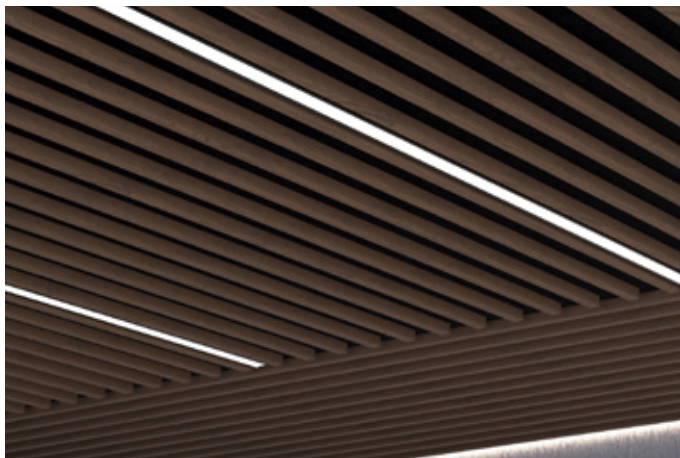

SoftenUp, Plateau Ceiling Frames in Mountain Lodge

Technical

NRC Rating	0.95*
Fire Test	AS ISO 9705:2003 (according to AS 5637.1:2015 requirements) Group 1 0.93
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Test results available upon request

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Health Product Declaration (HPD)** Environmental Product Declaration Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners

** HPD only applies to 12mm thickness



© The Health Product Declaration® logo is a registered trademark of HPD Collaborative.



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

SoftenUp, Plateau Ceiling Frames | June 2026

Colorways

WOODGRAIN



Picket Fence
WQ01




Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30




White Oak
WQ13



Baltic Birch
WQ12




Knotty Spruce
WQ29




French Bobbin
WQ08



Boat Shed
WQ02



Nordic Plank
WQ15




Boardwalk
WQ10




Mocha Legno
WQ25



Mountain Lodge
WQ24




Wine Barrel
WQ03




Log Cabin
WQ04




Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21




Weathered Slate
WQ14




Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18




Charred Larch
WQ09



Shadow Oak
WQ28




Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

SoftenUp, Plateau Ceiling Frames | June 2026

How to Specify

1. Choose Slat Size & Clearance


2. Choose Backer Panel Size

3. Choose Colorways

4. Optional Corner Panel

Slats are available in a range of thicknesses, heights, and clearances. Select the desired combination from the following:

Thickness	Height	Clearance
25mm	25mm	76mm
25mm	51mm	51mm
25mm	51mm	76mm
25mm	51mm	76mm
51mm	25mm	51mm
51mm	25mm	76mm
51mm	51mm	102mm
76mm	25mm	76mm
76mm	51mm	76mm
102mm	25mm	51mm
127mm	25mm	76mm
127mm	51mm	76mm




1. Choose Slat Size & Clearance

2. Choose Backer Panel Size

3. Choose Colorways

4. Optional Corner Panel

Backer panels are available in three lengths.

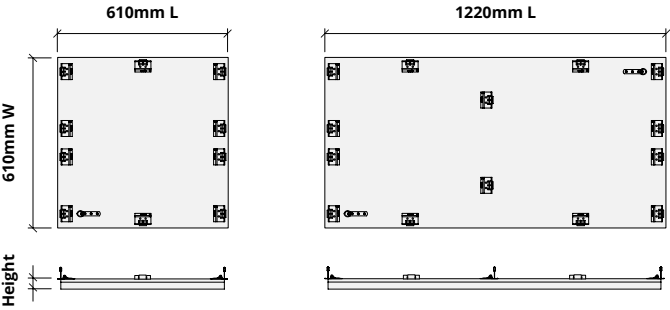

Clip spacing may differ. Product ships assembled.
Safety cable comes standard on all SoftenUp product lines. See installation guides for additional details.

1. Choose Slat Size & Clearance

2. Choose Backer Panel Size

3. Choose Colorways


4. Optional Corner Panel

Select one colorway for your slats and one colorway for your backer panel.
See colorway choices on page 3 and 4.

If you're specifying dark colored backer panels, we recommend dark drop ceiling grids (not provided).

Backer panel
Select one colorway

Slats
Select one colorway



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

SoftenUp, Plateau Ceiling Frames | June 2026

How to Specify (cont.)



1. Choose Slat Size & Clearance

2. Choose Backer Panel Size

3. Choose Colorways

4. Optional Corner Panel

SoftenUp acoustical ceiling panels can be seamlessly integrated with corresponding wall panels by specifying the corresponding corner piece.

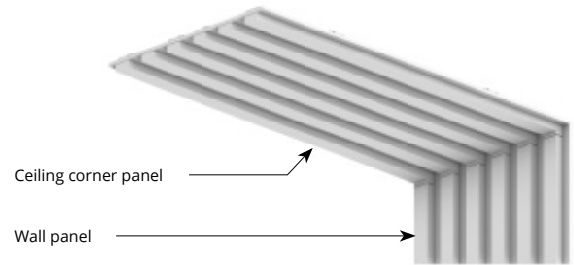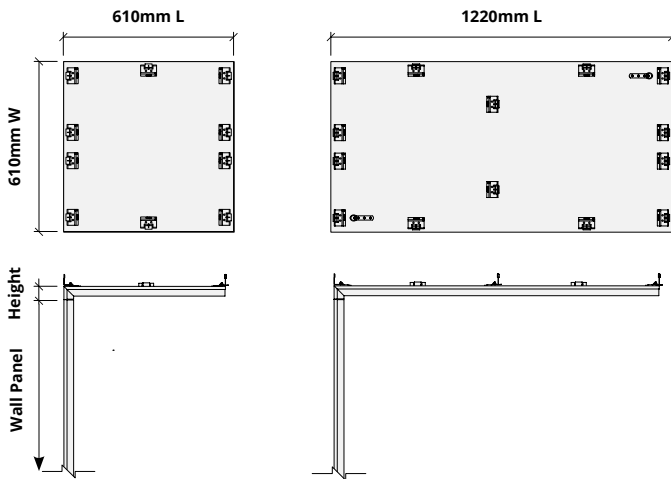

See corresponding SoftenUp™, Plateau wall panel specification sheet for additional information.




For questions or additional product information, visit acoufelt.com.au or call 1800 626 462


SoftenUp, Plateau Ceiling Frames | June 2026

Recommended Layouts

Layout 1

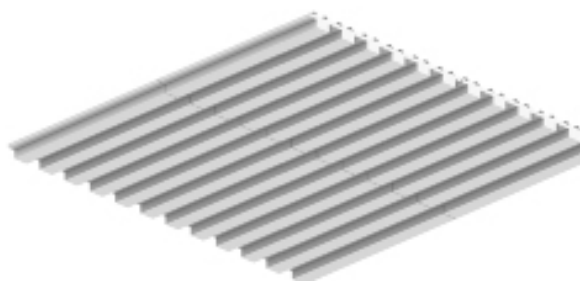


Layout 2

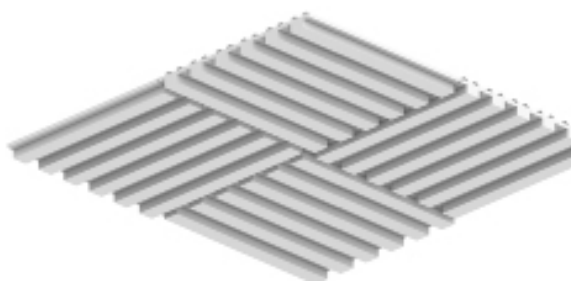

Layout 3



Layout 4

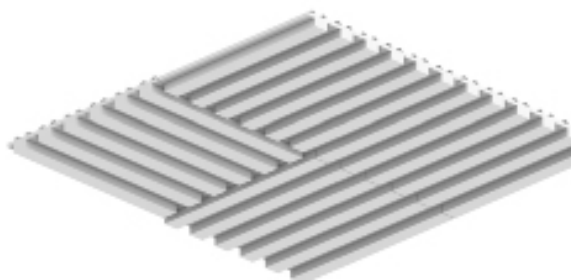


For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462


SoftenUp, Plateau Ceiling Frames | June 2026

Lighting Coordination


610mm x 610mm, 610mm x 1220mm Grid light

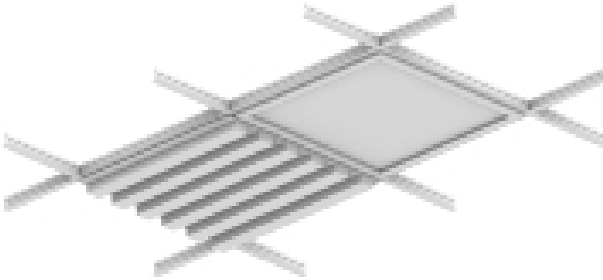


Drop pendant light

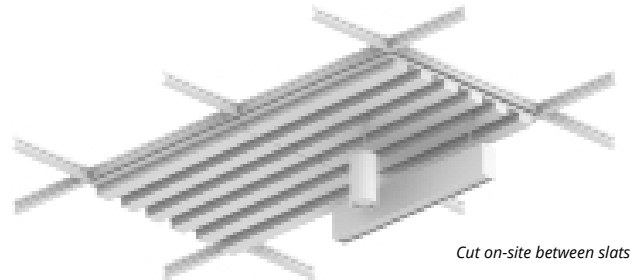

Recessed light

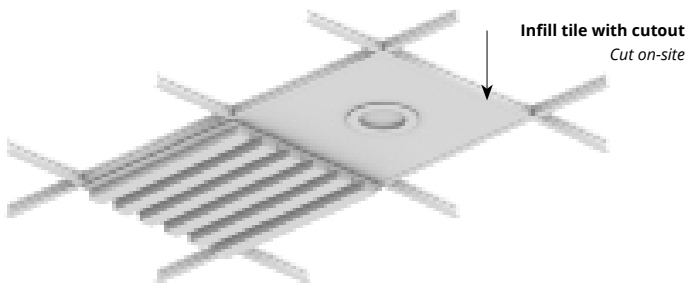

Grid mounted light (track, pendant)

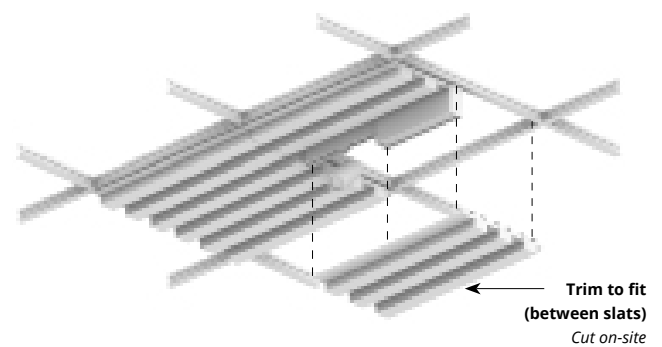


For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

SoftenUp, Plateau Ceiling Frames | June 2026

Acoustic Performance

Test Method	ASTM E795
Install Method	Type E-400
Rating Method	ASTM C423
Mounting Method	51mm T x 76mm H slat on 12mm backer with 400mm air gap
Test Results	NRC 0.95 SAA 0.96

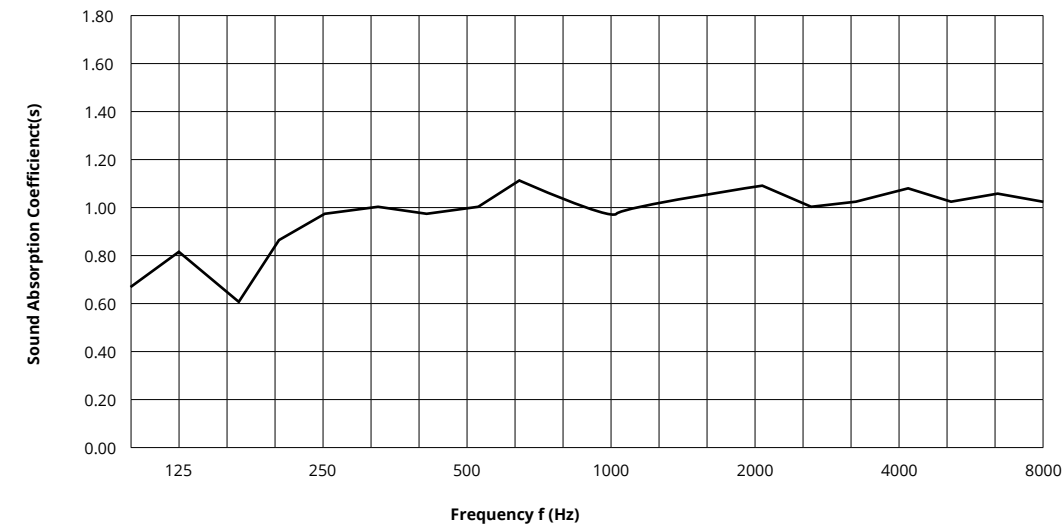

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.67	0.86	0.96	1.02	1.04	1.00	0.95

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com.au or call 1800 626 462

SoftenUp, Plateau Ceiling Frames | June 2026

Suspension

The SoftenUp ceiling tiles are designed to connect to standard drop-ceiling grid systems via a series of tabs integrated into the design. No additional hardware is required for standard installation. Seismic zones may require additional considerations (see note on seismic).

Life Safety

The panels can be trimmed on-site, using a sharp utility knife, to accommodate any existing signage and/or wayfinding markings. Cut-outs must occur in 51mm gap between slats. All fixtures must be supported independent of tiles.

** Panels cut on-site may require additional support.*

Weight

- 76mmH slat weight = 2 lbs./sq. ft.
- 25mmH slat weight = 1.25 lbs./sq. ft.

Clearance/Tolerance

When installed, SoftenUp tiles have a consistent 1/8" reveal to account for any on-site tolerance concerns. Panels have a method for tile alignment integrated into the design.

** A continuous slat design is available. Contact us for details.*

MEP/FP

The panels can be trimmed on-site, using a sharp utility knife, to accommodate any MEP/FP fixtures. These include, but are not limited to, drop-in lighting and diffusers, recessed lighting, linear diffusers, concealed and exposed fire sprinklers, and A/V equipment. Please consult all local and municipal codes, as well as a licensed engineer, for full compliance requirements. Cut-outs must occur in 51mm gap between slats. All fixtures must be supported independent of tiles.

**Panels cut on-site may require additional support.*

Ceiling Access

Panels with an integrated folding access tab are available upon request. These folding tabs allow for the removal of individual tiles to access ceiling systems.

Seismic

SoftenUp ceiling tiles can provide seismic compliance through a mechanical direct screw attachment through the panel to the grid system, or an individual tile off to building structure. Please consult all local and municipal codes, as well as a licensed engineer, for full compliance requirements.

