

# Truss Ceiling Baffles

## Specifications

**Application** Ceiling

Composition 100% polyester

**Material** FilaSorb™

**Recycled content** 60% min. rPET **Thickness** 12mm +/- 10% Weight 2400gsm

Standard sizes **Depth** – 50 up to 305mm

(in 25mm increments)

Custom size available upon request

**Length** - 305 up to 2800mm (in 152mm increments) Height - 76 up to 508mm (in 25mm increments)

#### Technical Data

Fire test method EN 13501-1: 2019

Classification B-s1. d0

Water vapour sorption method ASTM C1104-2019 (Procedure A

Modified)

Water sorbed by weight 0.20% (results based on a

12mm thick panel)

Total VOC test method SCS-EC10.3-2014 v4.0 meeting

standard CDPH/EHLB Standard

Method v.1.2-2017

**Total VOC result**  $\leq 0.5 \text{mg/m}^3$ 

Colourfastness test method ISO 105-B02

Rating 6-7

## Guarantees

Made from 60% min. recycled content

Sustainability



Total VOC's less than 0.5 mg/m³ (3<sup>rd</sup> Party Verified)



Generated using 40% solar energy



Recyclable at end-of-life











**Lead Time** 6-8 weeks Origin United Kingdom

Warranty against defects **Colourfastness warranty** 

20 years\* 20 years\* \*conditions apply

### **Acoustic Performance**

Test method

ASTM C423-17: Standard test method for sound absorption and sound absorption coefficients by

the reverberation room method


method

Installation J-600. Sample tested 5 baffles each hanging 600m from the floor and 152mm from each other

Rating method AS ISO 11654 -2002: Acoustics - rating of sound

absorption - material and sytems

Test results NRC 1.65 | <1.0 (MH) aw, Class A

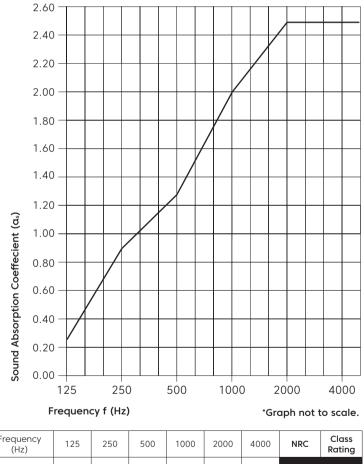

Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
12mm	0.26	0.86	1.25	2.02	2.49	2.49	1.65	Class A

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results




## Truss Design

#### Sizes

Depth	50mm up to 305mm (in 25mm increments)
Length	305mm up to 2800mm (in 152mm increments)
Height	76mm up to 508mm (in 25mm increments)
Thickness	12mm

#### **Elevation**

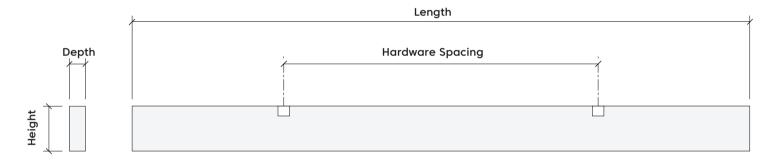

#### **Hardware Spacing**

300 - 500mm - 152mm on centre spacing

500 - 800mm - 305mm on centre spacing

800 - 1400mm - 610mm on centre spacing

1400 - 2300mm - 1220mm on centre spacing

2300 - 2800mm - 1525mm on centre spacing

300 - 500mm



500 - 800mm



800 - 1400mm



1400 - 2300mm



2300 - 2800mm 1525mm



## FilaSorb<sup>TM</sup> Colourways




#### Can't find a colour?

We are constantly updating our palette, which includes adding and discontinuing certain colour lines. If you can't find the colour you are looking for, please contact us with your colour request, as we may still have stock available.



## WoodBeQuiet™ Prints

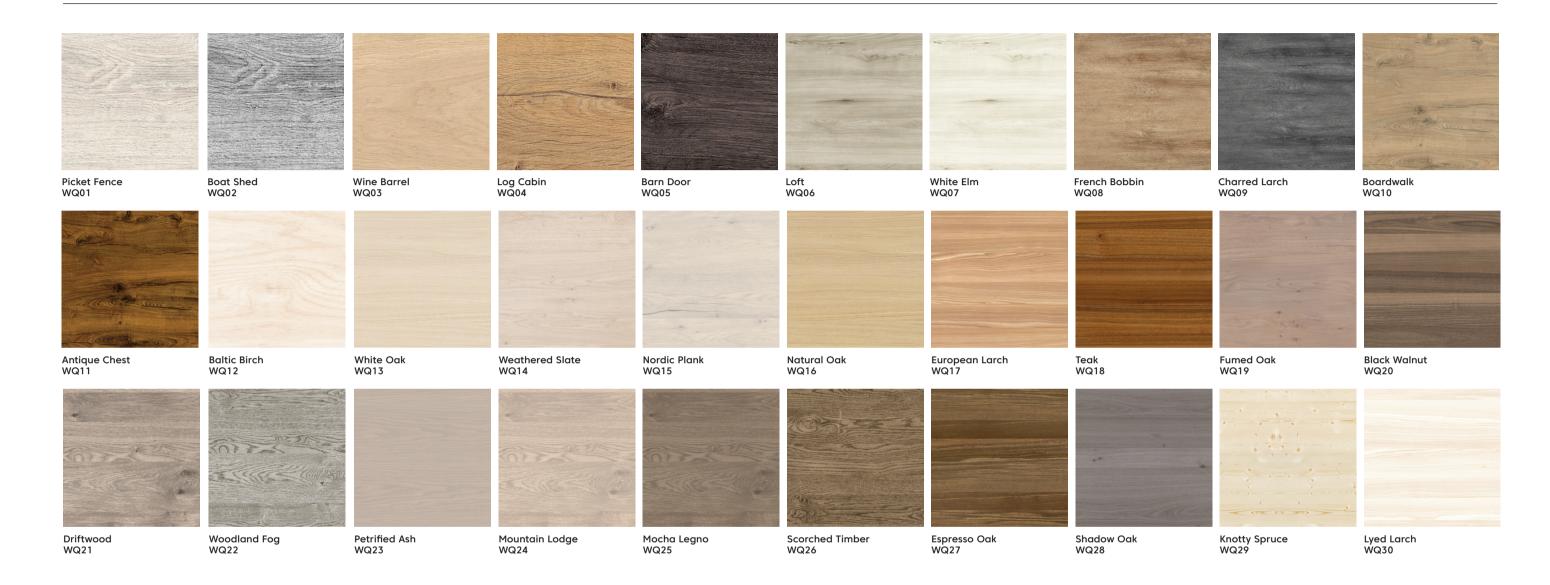

## Mounting Methods

#### Cable Cable to deck Cable to t-grid Cable to Unistrut 2-piece cable coupler with - 15/16" flat T-grid (by others) P1000 series Unistrut (by others) 1/4"-20 female thread Aircraft cable Twist lock Aircraft cable & spring channel nut assembly Aircraft cable Cable gripper Aircraft cable Cable gripper assembly assembly Cable gripper - Baffle Baffle - Cable gripper assembly Baffle

