


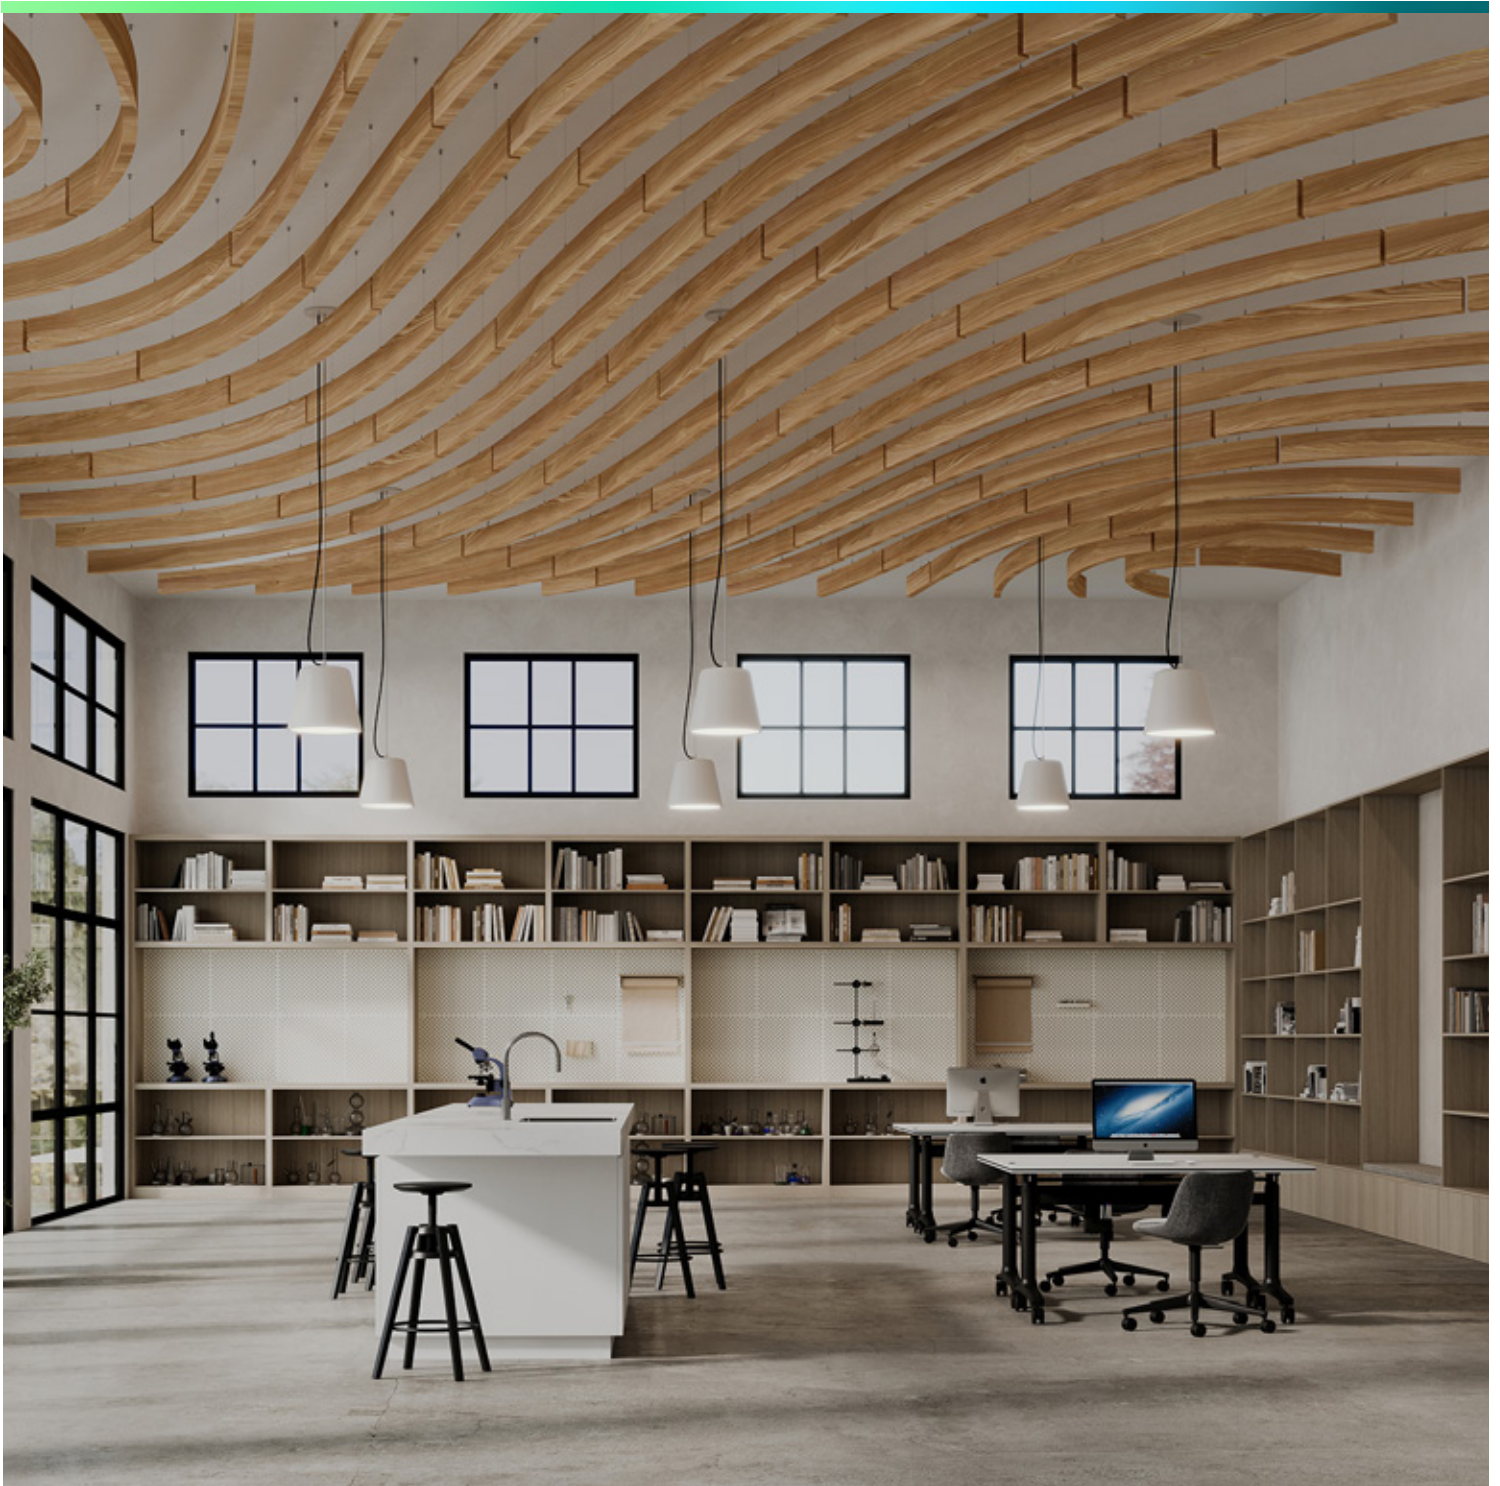

Versiform Ceiling Baffles

WoodGrain Collection

Versiform lets you shape endless design possibilities, tailored to any ceiling space. These dimensional ceiling baffles offer complete freedom to create custom patterns—whether uniform, organic, or anything in between. Ideal for both expansive open areas and compact, high-traffic spaces, Versiform adapts to meet any design need. With its creative flexibility and excellent sound absorption, it's the perfect solution for functional and visually striking ceiling environments.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Thickness	12mm (±10%)
Weight	2400gsm
Standard Sizes	Heights: 102mm up to 305mm H (25mm increments) Curve lengths: Custom up to 2794mm L Thickness: 51, 76mmT <i>See page 4 for more details. Custom sizes available</i>



Versiform Ceiling Baffles in European Larch

Technical

NRC Rating	1.65*
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Test results available upon request

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Environmental Product Declaration Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Versiform Ceiling Baffles | May 2026

Colorways

WOODGRAIN



Picket Fence
WQ01




Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30




White Oak
WQ13



Baltic Birch
WQ12




Knotty Spruce
WQ29




French Bobbin
WQ08



Boat Shed
WQ02



Nordic Plank
WQ15




Boardwalk
WQ10




Mocha Legno
WQ25



Mountain Lodge
WQ24




Wine Barrel
WQ03




Log Cabin
WQ04




Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21




Weathered Slate
WQ14




Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18




Charred Larch
WQ09



Shadow Oak
WQ28




Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27




For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Versiform Ceiling Baffles | May 2026


Sizes

Standard Heights Heights: 102mm up to 305mm (25mm increments)
Curve lengths: Custom up to 2794mm L
Thickness: 51, 76mm T



Elevation

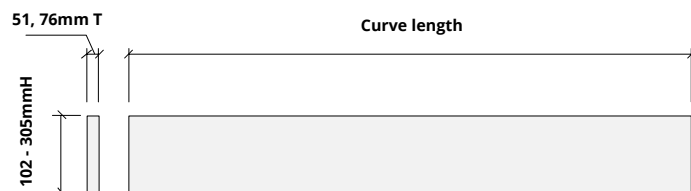

Perspective

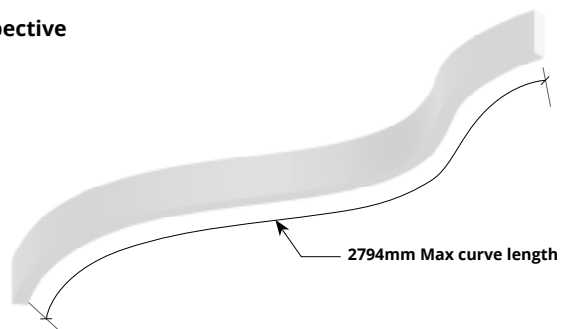

Design Examples

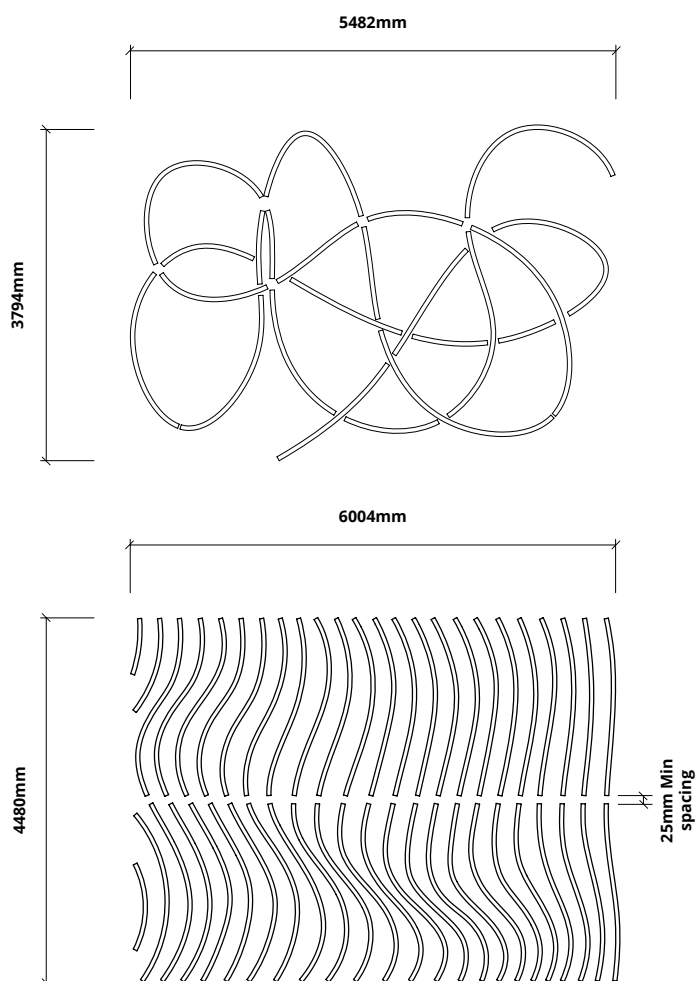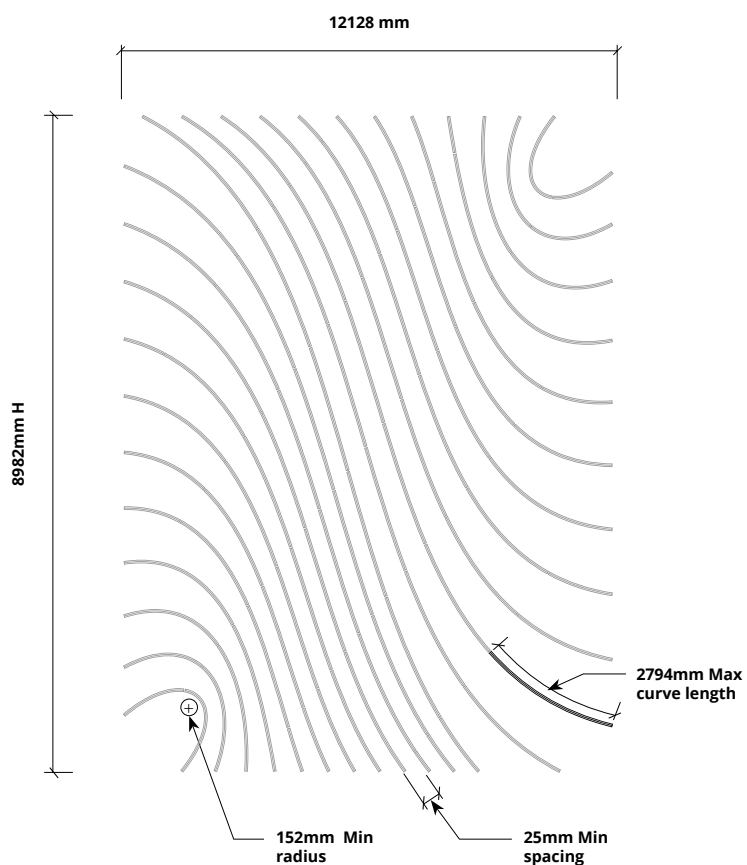

For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Versiform Ceiling Baffles | May 2026

How to Specify

1. Design Layout

2. Choose Sizes

3. Choose Colorways

The baffles can be mixed in a variety of patterns. Choose or design your layout.

1. Design Layout

2. Choose Sizes

3. Choose Colorways

Choose sizes that work with your design and space.

1. Design Layout

2. Choose Sizes

3. Choose Colorways

See colorway choices on page 3.




For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462


Versiform Ceiling Baffles | May 2026

Mounting Methods


Cable

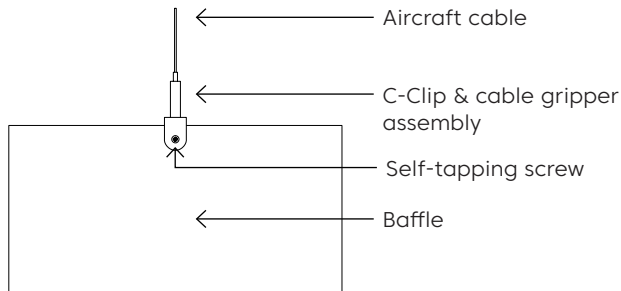


Cable to deck

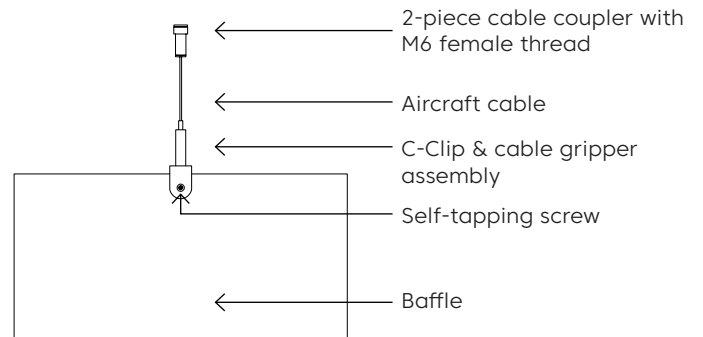


Swivel cable to deck

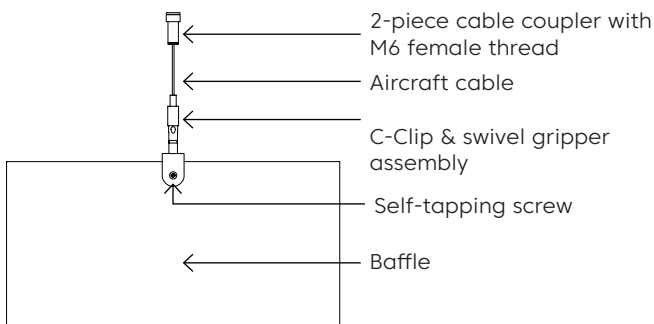


Cable to T-grid

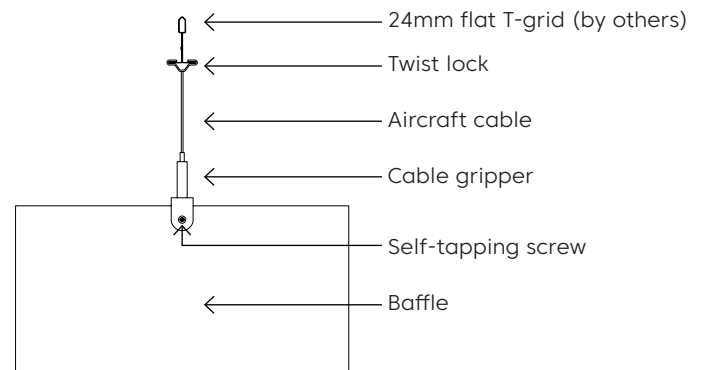


Threaded Rod

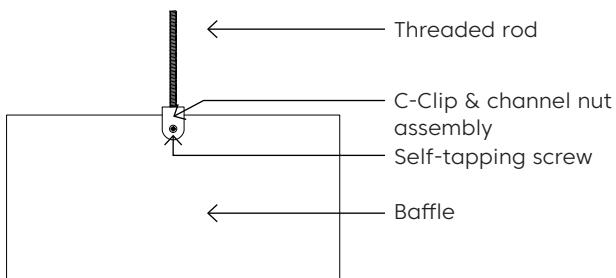

Magnet to T-grid

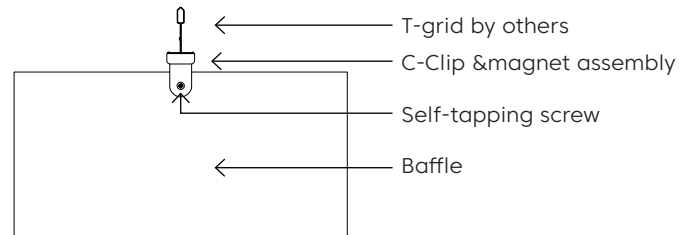


Twist lock to T-grid

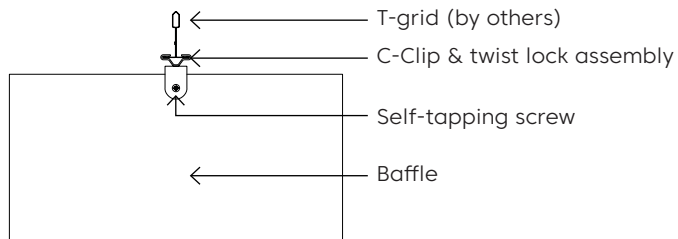

Acoustic Performance

Test Method	ASTM E795-16
Install Method	J-600
Rating Method	ASTM C423-17
Mounting Method	Sample tested 5 baffles 2794mm L x 305mm D x 76mm T, hanging 600mm from floor and 152mm from each other
Test Results	NRC 1.65 SAA 1.68

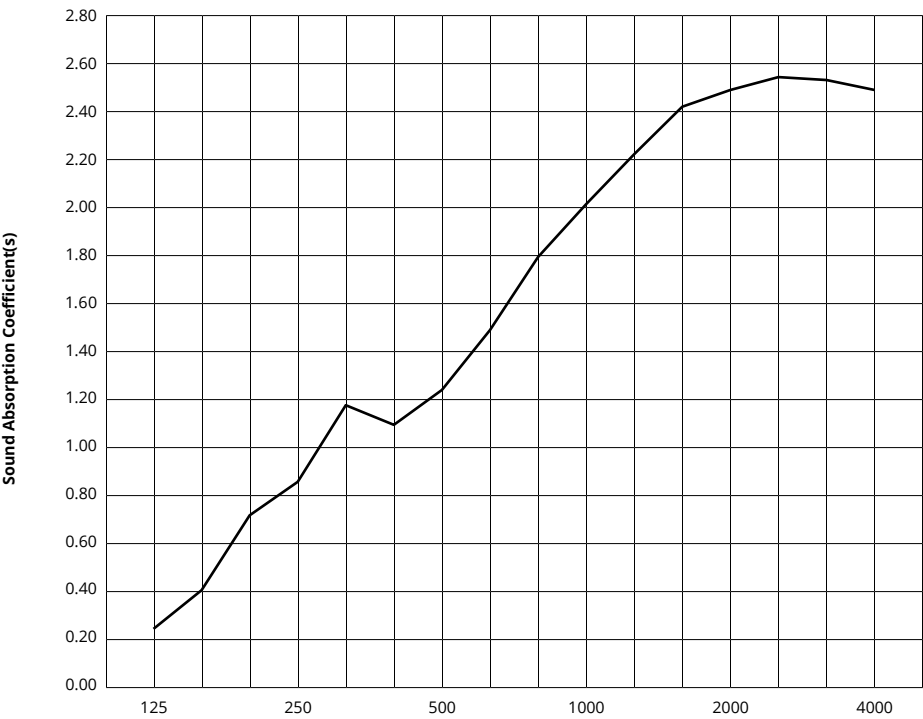

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.26	0.86	1.25	2.02	2.49	2.49	1.65

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com.au or call 1800 626 462

Versiform Ceiling Baffles | May 2026