
acoufelt

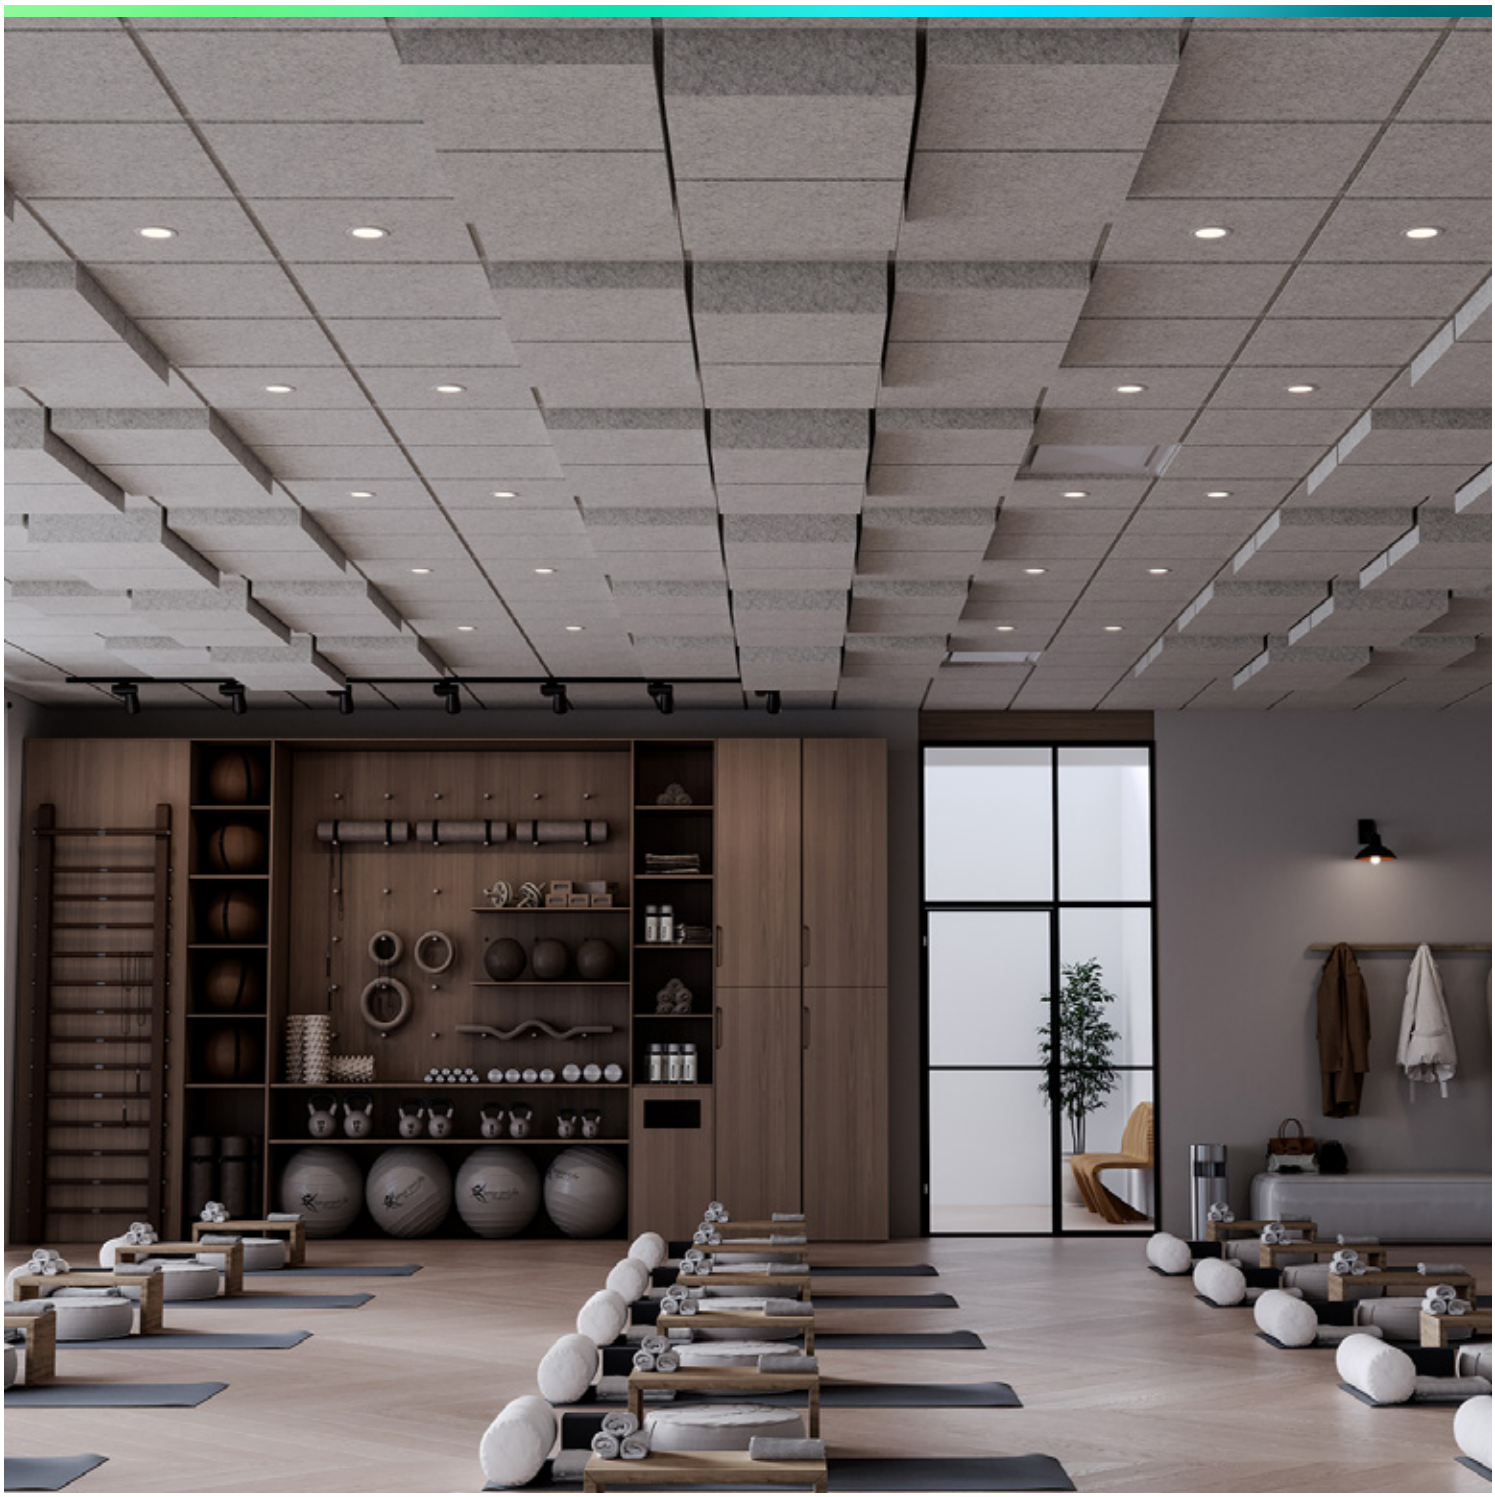

Vista, Box

Ceiling Frames

Premier Collection

Vista, Box introduces bold, expansive geometry that elevates any space with a commanding, sculptural presence. The Box design offers a full 610x610mm square option that transforms interiors into immersive experiences. This ceiling frame system brings both visual sophistication and acoustic balance to large areas. In galleries, performance venues, and corporate environments, from offices to conference rooms, Vista establishes rhythm and order while fostering acoustic calm, becoming an integral part of the architectural narrative.

Specifications

Surface	Ceiling	
Material	FilaSorb™ polyester felt	
Weight	2400gsm	
Standard Sizes	**Height** 25, 95, 150mm H	**Backer Panels** 600mm W x 600mm L
Compatible T-grid	**Type** 24mm Flat 14mm Flat	**Layout** Standard 600mm x 600mm Standard 600mm x 600mm



Vista, Box Ceiling Frames in Milkyway

Technical

NRC Rating	1.30*
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

** Rating is estimated based on similar product designs. Comparison NRC results available upon request.*

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

** PET is recyclable through participating partners*

© 2026 Acoufelt. All rights reserved.

Colorways

PREMIER

White
WH12


Milkyway
MI74


Ivory
IV11

Pearl
PE21


Valentine
VA70


Quartz
QU67


Stonewash
ST72


Sea Salt
SE57


Platinum
PL04


Almond
AL55


Pistachio
PI25


Turmeric
TU60


Flamingo
FL61


Amethyst
AM69


Periwinkle
PE23


Peacock
PE20


Metal
ME03


Mushroom
MU75


Celery
CE65


Wheat
WH68


Peach
PE19


Lilac
LI13


Marine
MA15


Sencha
SE58


Grey
GR02


Umber
UM54


Wasabi
WA29


Popcorn
PO26


Currant
CU59


Berry
BE06


Azure
AZ05


Oregano
OR18


Charcoal
CH01


Walnut
WA56


Eucalyptus
EU71


Carrot
CA08


Loganberry
LO77


Granite
GR62


Denim
DE09


Kale
KA12

Piano Black
PI24

Slate
SL27

Nori
NO76

Peppercorn
PE22

Shiraz
SH63

Flint
FL64

Midnight
MI16


© 2026 Acoufelt. All rights reserved.

Sizes


Standard Heights 25, 95, 150mm H

Standard Widths 600mm W


Standard Length 600mm L

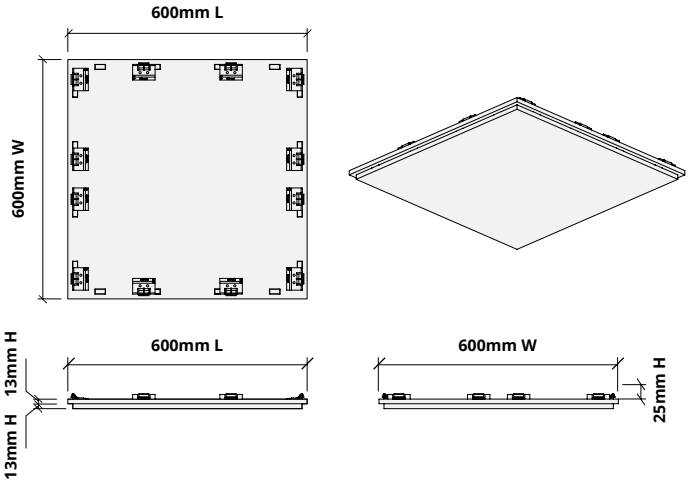

600mm W x 600mm L x 25mm H

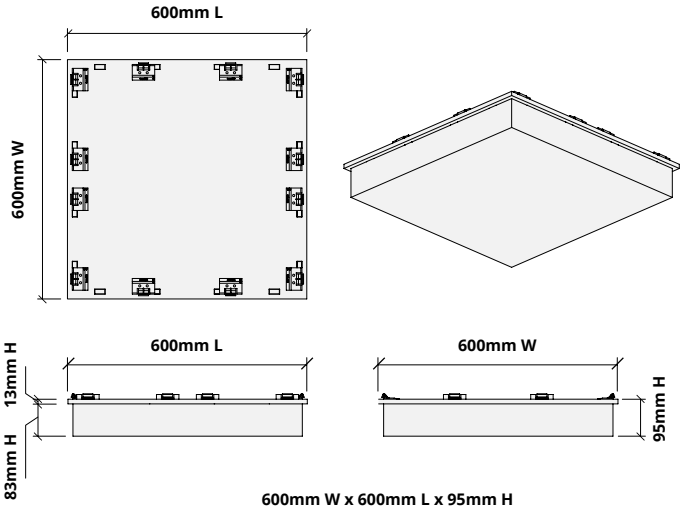

600mm W x 600mm L x 95mm H

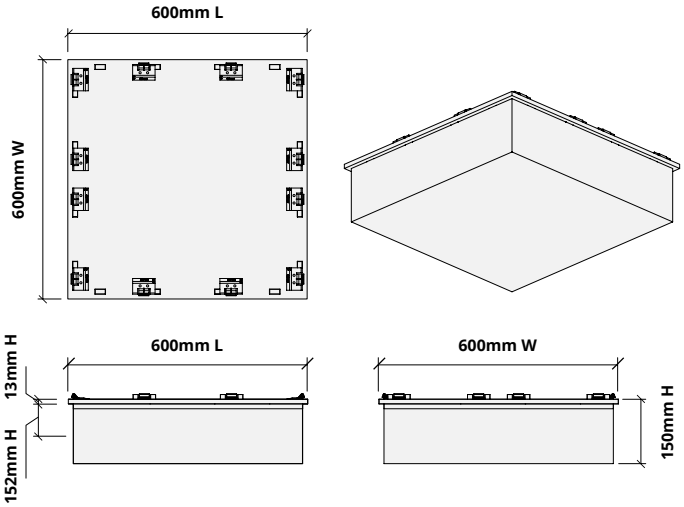


600mm W x 600mm L x 150mm H

Choose Colorways

Select one colorway for your cubes and one colorway for your backer panel; or one colorway for both. See colorway choices on page 3.

If you're specifying dark colored backer panels, we recommend dark drop ceiling grids (not provided).

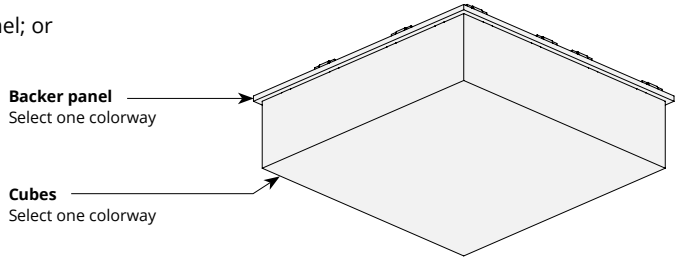


For questions or additional product information, visit **acoufelt.com.au or call 1800 626 462**


© 2026 Acoufelt. All rights reserved.

Lighting Coordination

600mm x 600mm Grid light

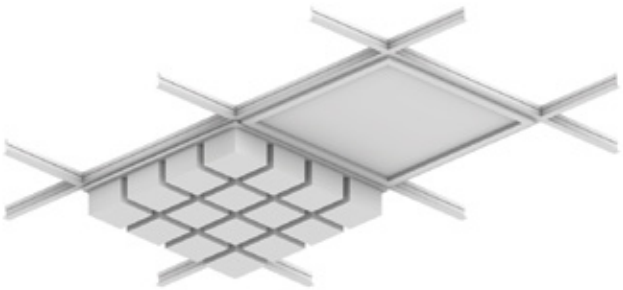


Drop pendant light

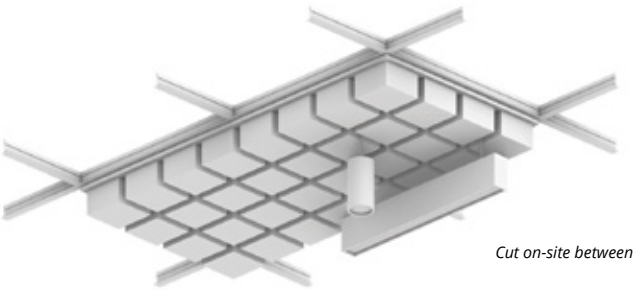


Cut on-site between cubes

Recessed light

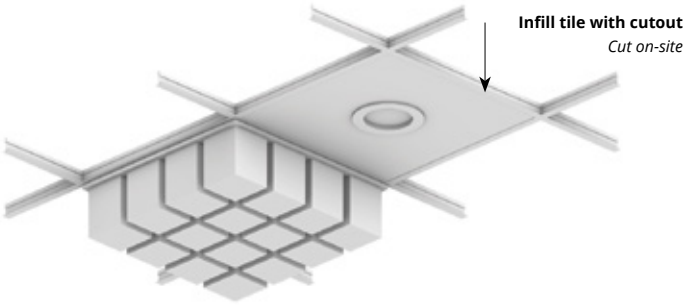


Grid mounted light (track, pendant)

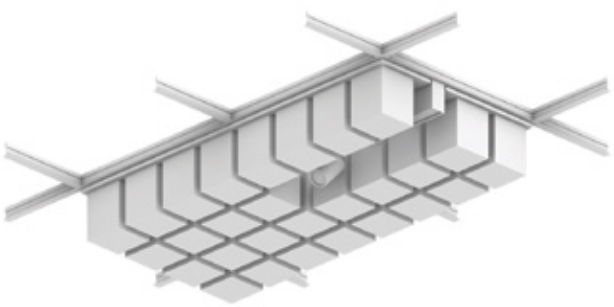

© 2026 Acoufelt. All rights reserved.

Acoustic Performance

Test Method	ASTM C423-23
Mounting Method	Type E-560
Test Results	NRC 1.30 SAA 1.30

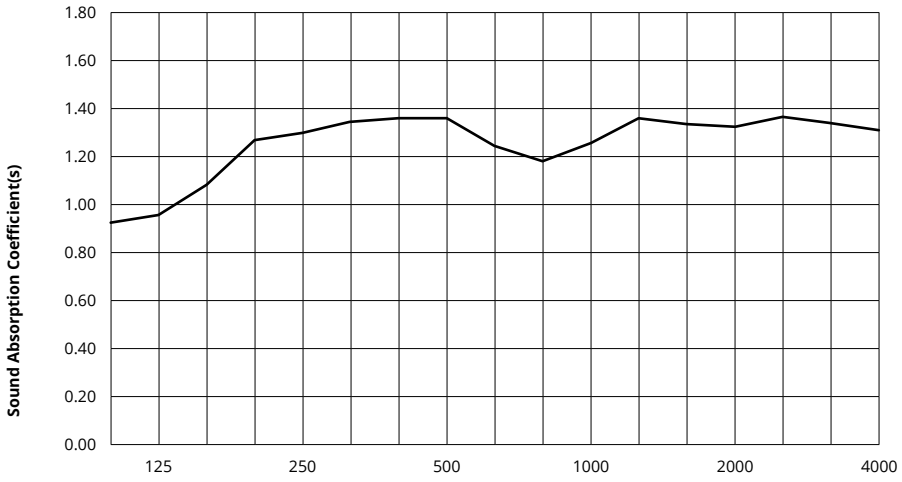

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.98	1.27	1.35	1.24	1.35	1.33	1.30

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

© 2026 Acoufelt. All rights reserved.