


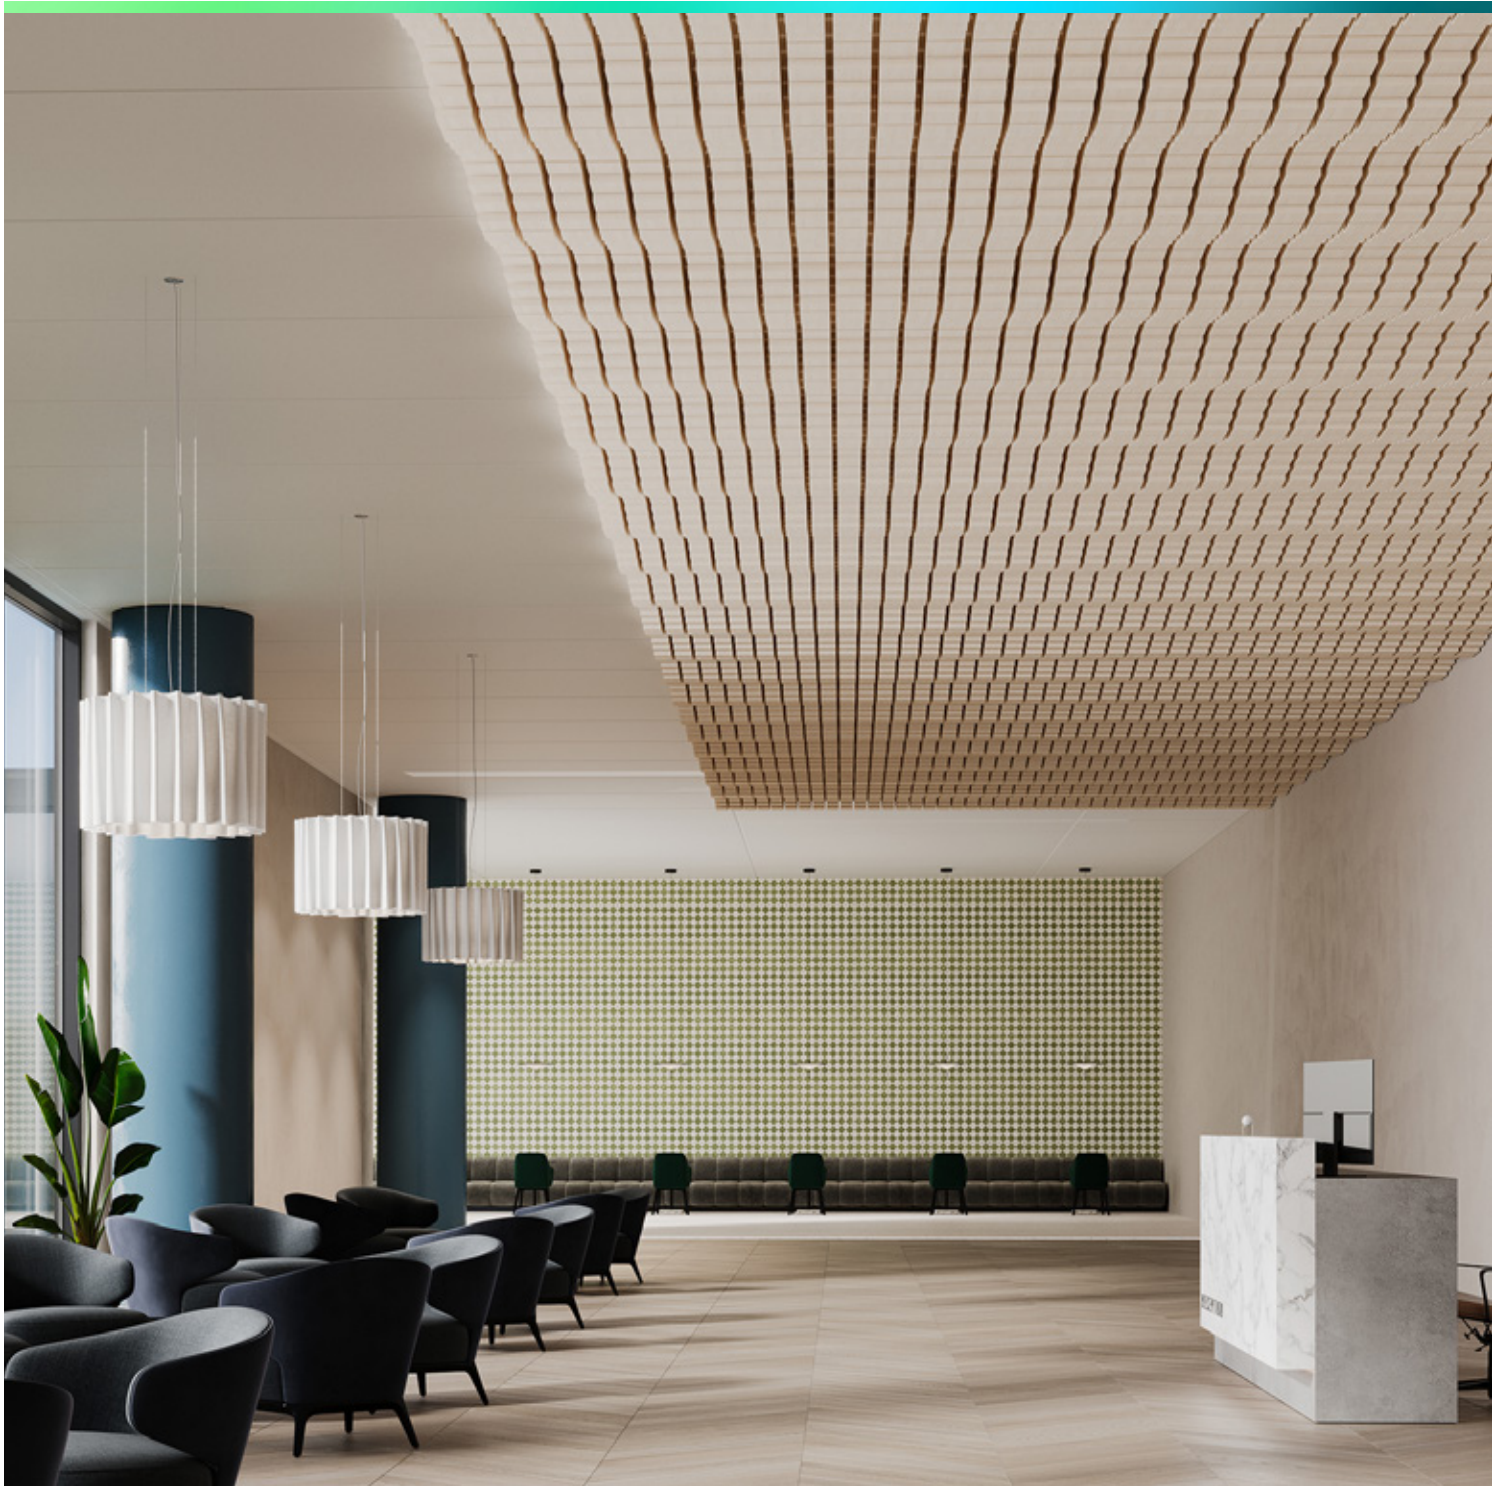


Vista, Mountain Ceiling Frames

WoodGrain Collection

Vista Mountain Wall Tiles feature cubes with varying depths, creating a soothing, mountain-like design while providing exceptional sound management. Choose a single Premier, WoodGrain finish, or mix two complementary colors for the cubes and the backing. Modern, modular, and easy to install, Vista transforms any busy environment into a more serene and visually striking space.

Specifications

Surface	Ceiling	
Material	FilaSorb™ polyester felt	
Weight	2400gsm	
Standard Sizes	Height	Backer Panels
	76-152mm H	610mm W x 610mm L
Compatible T-grid	Type	Layout
	14mm Flat	Standard 610mm x 610mm
	24mm Flat	Standard 610mm x 610mm

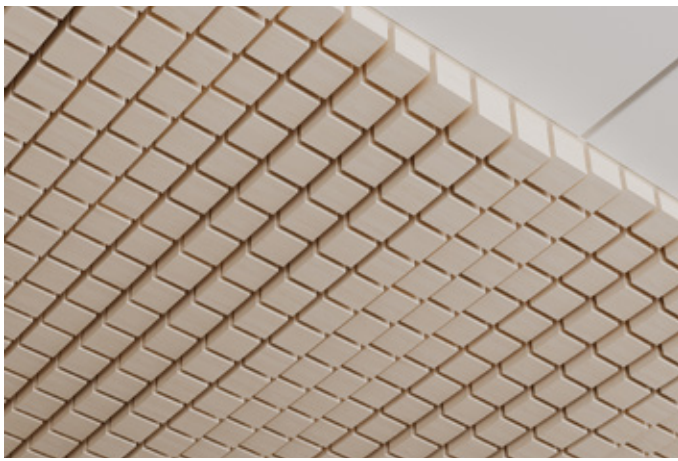

Vista, Mountain Ceiling Frames in White Oak

Technical

NRC Rating	1.30*
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Rating is estimated based on similar product designs. Comparison NRC results available upon request.

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Vista, Mountain Ceiling Frames | June 2026

WOODGRAIN



Picket Fence
WQ01




Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30




White Oak
WQ13



Baltic Birch
WQ12




Knotty Spruce
WQ29



French Bobbin
WQ08




Boat Shed
WQ02



Nordic Plank
WQ15




Boardwalk
WQ10




Mocha Legno
WQ25



Mountain Lodge
WQ24




Wine Barrel
WQ03



Log Cabin
WQ04



Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21




Weathered Slate
WQ14




Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17




Fumed Oak
WQ19



Teak
WQ18



Charred Larch
WQ09



Shadow Oak
WQ28




Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26





Espresso Oak
WQ27

Sizes

Standard Heights 76-152mm H (25mm increments)

Standard Widths 610mm W


Standard Length 610mm L

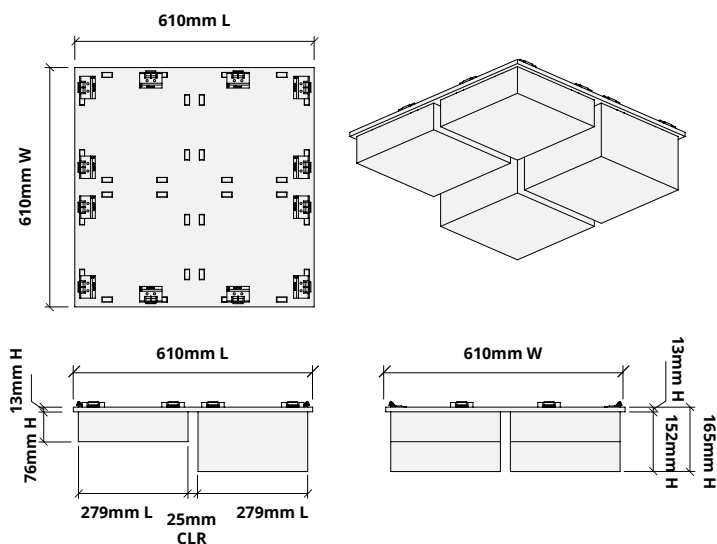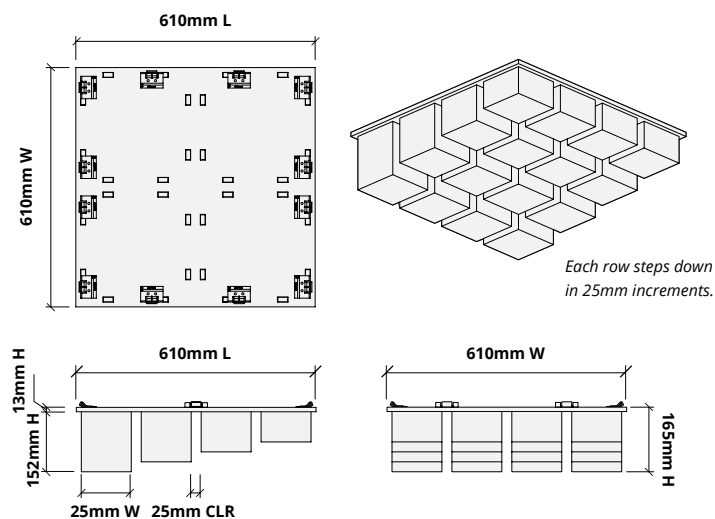

Choose Colorways

Select one colorway for your cubes and one colorway for your backer panel; or one colorway for both. See colorway choices on page 3.

If you're specifying dark colored backer panels, we recommend dark drop ceiling grids (not provided).

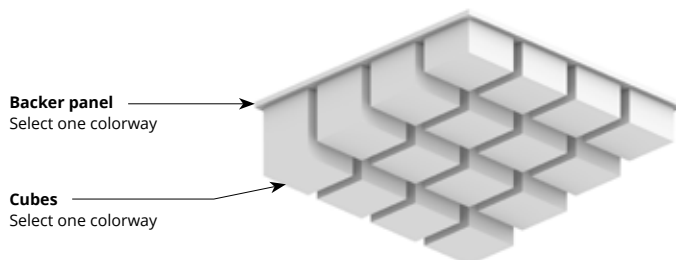


For questions or additional product information, visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462


Vista, Mountain Ceiling Frames | June 2026

Lighting Coordination


610mm x 610mm Grid light

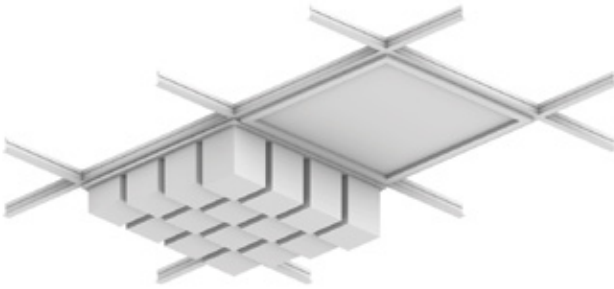


Drop pendant light

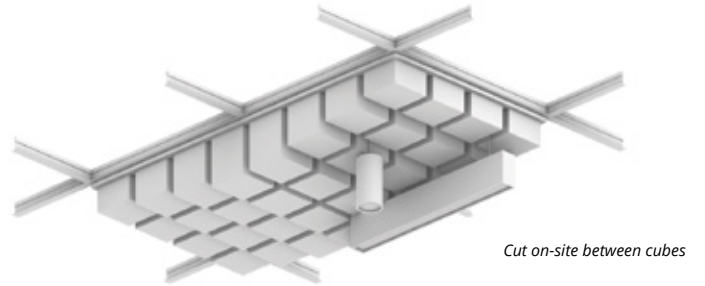


Recessed light

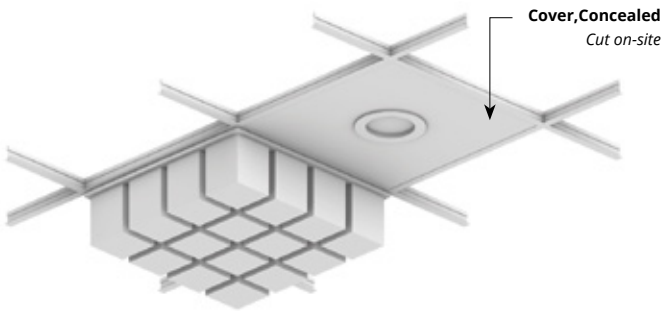

Grid mounted light (track, pendant)

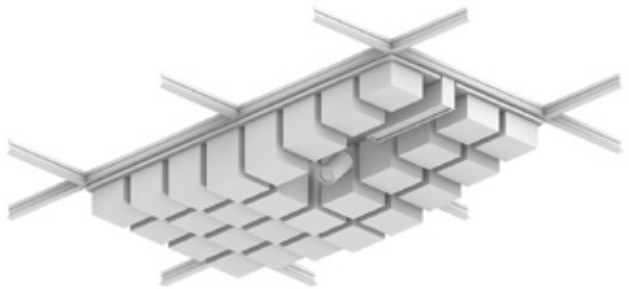

Recommended Layout

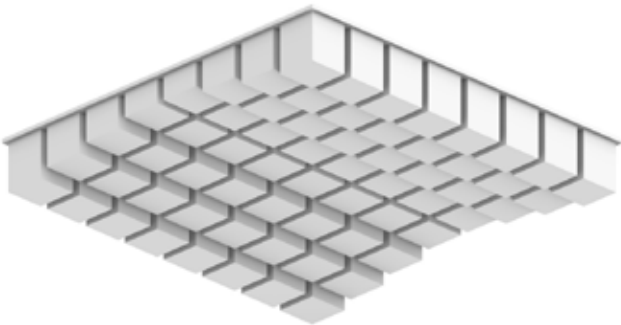

For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Vista, Mountain Ceiling Frames | June 2026

Acoustic Performance


Test Method ASTM C423-23

Install Method

Rating Method

Mounting Method Type E-560

Test Results NRC 1.30
SAA 1.30

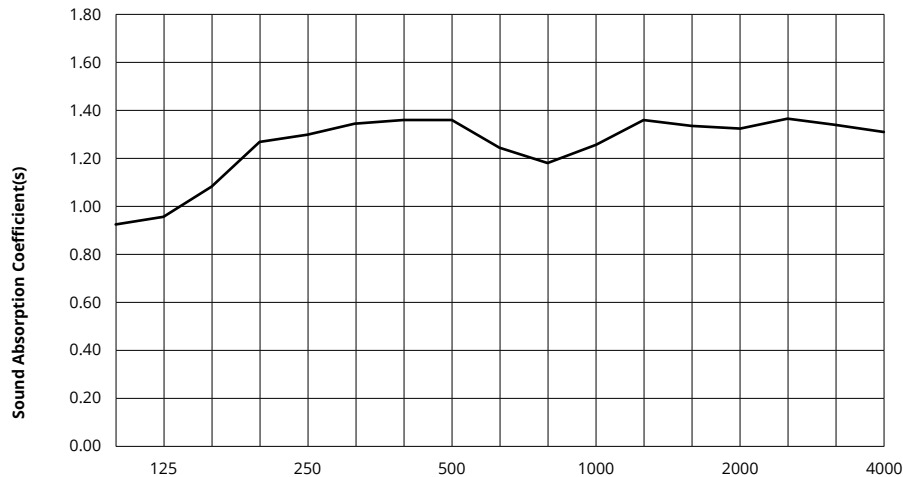

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.98	1.27	1.35	1.24	1.33	1.33	1.30

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Vista, Mountain Ceiling Frames | June 2026