



Vista, Oceanic Ceiling Frames

Premier Collection

With varying depths from front to back and side to side, the cubes of Vista, Oceanic create an undulating seascape while providing exceptional sound management. Choose a single Premier color option or mix two complementary colors for the cubes and the backing. Modern, modular, and easy to install with T-grid clips, Vista can change a busy space into a sea of tranquility.

Specifications

Surface	Ceiling	
Material	FilaSorb™ polyester felt	
Weight	2400gsm	
Standard Sizes	Height	Backer Panels
	1-152mm H	610mm W x 610mm L
Compatible T-grid	Type	Layout
	25mm Flat	Standard 610mm x 610mm
	15mm Flat	Standard 610mm x 610mm



Vista, Oceanic Ceiling Frames in Celery

Technical

NRC Rating	1.30*
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Rating is estimated based on similar product designs. Comparison NRC results available upon request.

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental



























Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Vista, Oceanic Ceiling Frames | May 2026

							
White WH12	Milkyway MI74	Ivory IV11	Pearl PE21	Valentine VA70	Quartz QU67	Stonewash ST72	Sea Salt SE57
							
Platinum PL04	Almond AL55	Pistachio PI25	Turmeric TU60	Flamingo FL61	Amethyst AM69	Periwinkle PE23	Peacock PE20
							
Metal ME03	Mushroom MU75	Celery CE65	Wheat WH68	Peach PE19	Lilac LI13	Marine MA15	Sencha SE58
							
Grey GR02	Umber UM54	Wasabi WA29	Popcorn PO26	Currant CU59	Berry BE06	Azure AZ05	Oregano OR18
							
Charcoal CH01	Walnut WA56	Eucalyptus EU71	Carrot CA08	Loganberry LO77	Granite GR62	Denim DE09	Kale KA12
							
Piano Black PL24	Slate SL27	Nori NO76	Peppercorn PE22	Shiraz SH63	Flint FL64	Midnight MI16	



For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462



Vista, Oceanic Ceiling Frames | May 2026

Sizes

Standard Heights 1-152mm H (25mm increments)

Standard Widths 610mm W

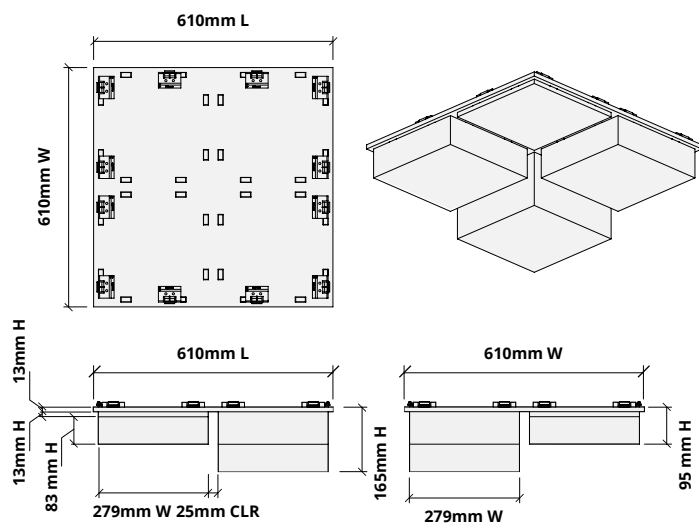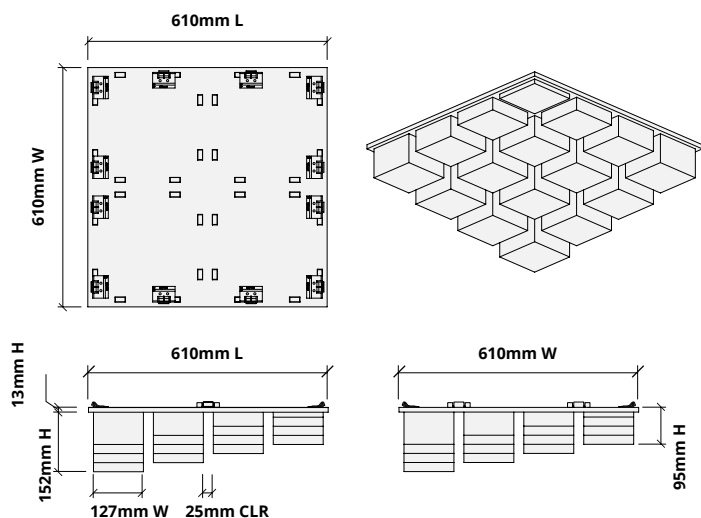
Standard Length 610mm L



Choose Colorways

Select one colorway for your cubes and one colorway for your backer panel; or one colorway for both. See colorway choices on page 3.

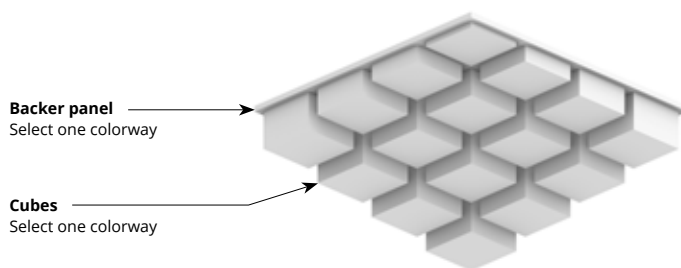If you're specifying dark colored backer panels, we recommend dark drop ceiling grids (not provided).




For questions or additional product information, visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462


Vista, Oceanic Ceiling Frames | May 2026

Lighting Coordination

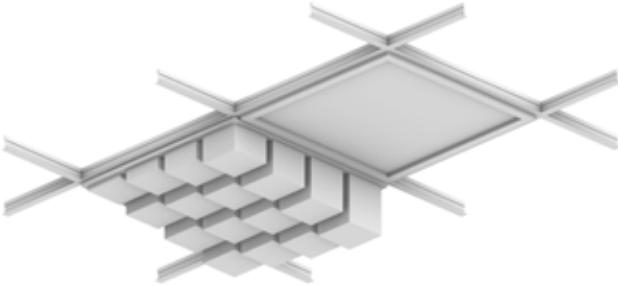610mm x 610mm, 610mm x 1219mm Grid light




Drop pendant light

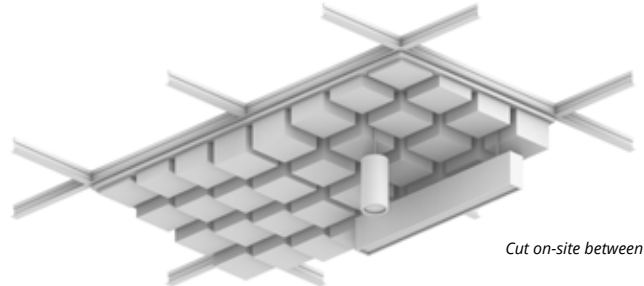


Cut on-site between cubes

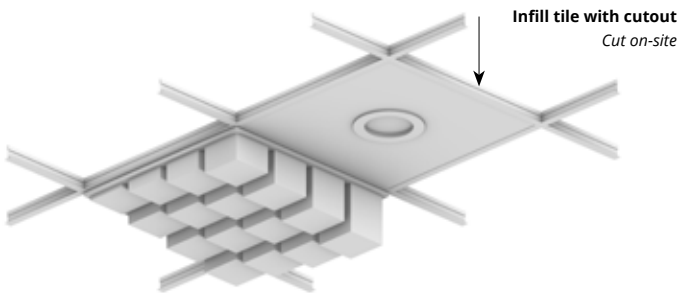Recessed light




Infill tile with cutout
Cut on-site

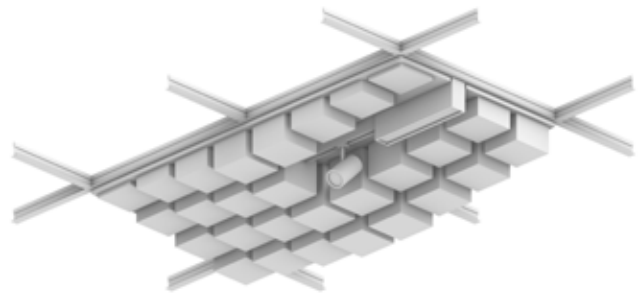Grid mounted light (track, pendant)



Recommended Layout

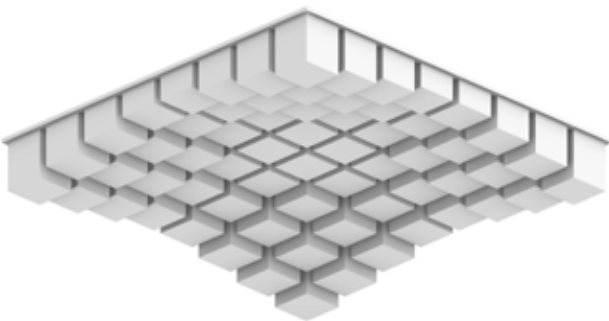


For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

Vista, Oceanic Ceiling Frames | May 2026

Acoustic Performance

Test Method	ASTM E795
Install Method	Type E-400
Rating Method	ASTM C423
Mounting Method	
Test Results	

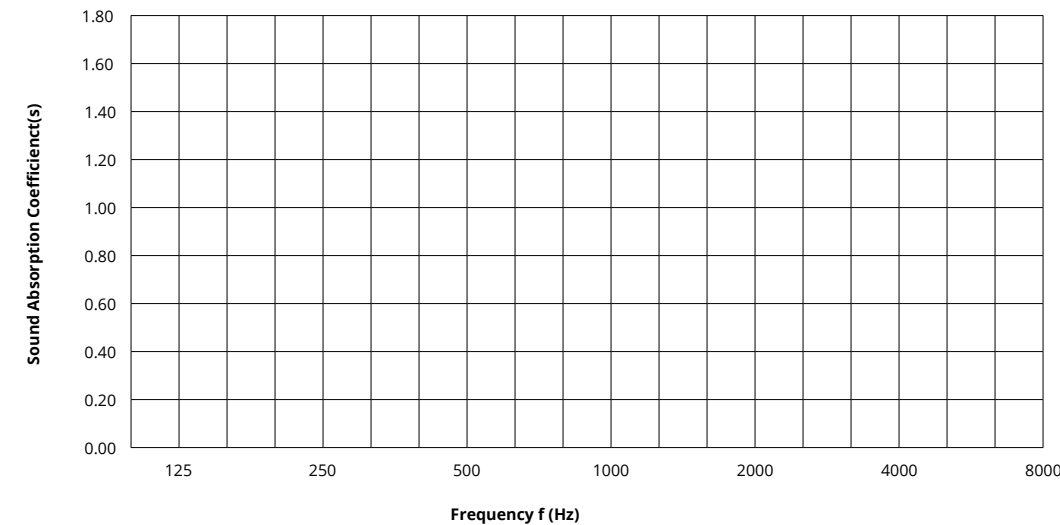

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

Vista, Oceanic Ceiling Frames | May 2026