



Planks

WoodBeQuiet™

acoufelt
making quiet

Product Detail

Application	Wall and ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min
Dimensions	200 x 1000mm
Thickness	12mm +/- 10%

Guarantees

Warranty against defects 20 years*
Light fastness warranty 20 years*

*conditions apply

QuickShip



Talk to our team on our QuickShip lead times

Technical Data

Fire rating	AS/ISO 9705.1, Group 1 ASTM E84-17a, Class A EN 13501-1: 2019, B-s1, d0
Indoor air quality	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017, ≤ 0.5mg/m ³
Light fastness	ISO 105-B02, 6-7


Sustainability



Made from 60% min. recycled content



Red List Free Declare Label



Generated using 40% solar energy



Recyclable at end-of-life



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)




Phenol & formaldehyde free



Acoustic Performance

Test method ISO 354-2006
Results NRC 0.45 (no air gap)

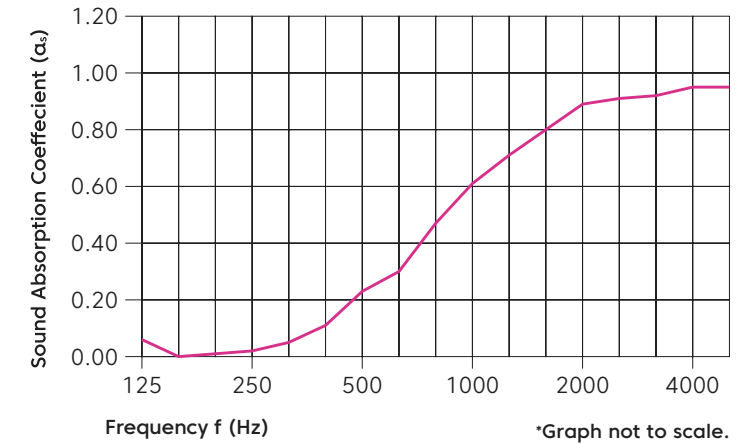

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
α _s no air gap	0.06	0.02	0.23	0.61	0.89	0.95	0.45



Colorways

Light Reflectance Values (LRV), are a measure of the percentage of visible and usable light that is reflected from a surface when illuminated by a light source.



Picket Fence
LRV – 58.25%



Boat Shed
LRV – 35.33%



Wine Barrel
LRV – 26.64%



Log Cabin
LRV – 20.38%



Barn Door
LRV – 6.45%



Loft
LRV – 46.66%



White Elm
LRV – 68.29%



French Bobbin
LRV – 25.01%



Charred Larch
LRV – 5.29%





Boardwalk
LRV – 25.68%



Antique Chest
LRV – 6.14%

Mounting Methods

Peel and Stick Backing

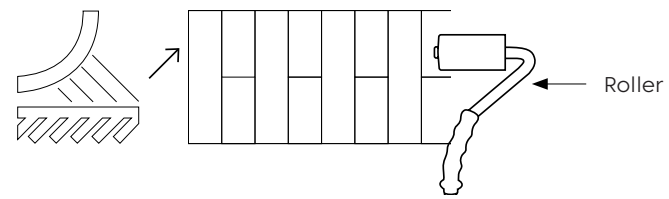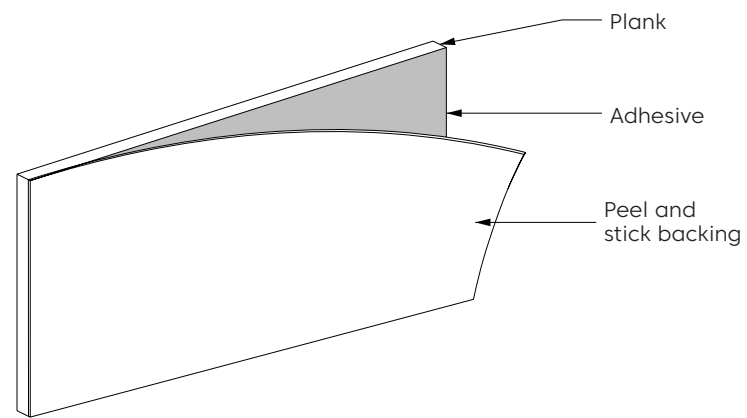

Constructive Adhesive

