



WoodBeQuiet Slat Wall Panels

WoodGrain Collection

WoodBeQuiet Slat walls are an acoustic panel carved with equally spaced vertical v-cuts, and printed with our high-resolution WoodBeQuiet™ woodgrains, creating a finish that imitates that of real timber slats.

Specifications

Surface	Wall
Material	FilaSorb™ polyester felt
Weight	12mm, 2400gsm
Standard Sizes	1200mm W x 2800mm H <i>Custom sizes available</i>



WoodBeQuiet Slats 152mm W Wall Panel in Boardwalk with Deep Brown V-cut



WoodBeQuiet Slats 50mm W Wall Panel Slats in Loft with Dark Taupe V-cut

Technical

NRC Rating	12mm, 0.45*
Fire Test	AS ISO 9705:2033 (according to AS 5637.7:2015 requirements) Group 1 0.93
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Test results available upon request.

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.



For questions or additional product information,
visit acoufelt.com.au or call **1800 626 462**

WoodBeQuiet Slats Wall Panels | April 2026

Colorways

WOODGRAIN



Picket Fence
WQ01




Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30




White Oak
WQ13



Baltic Birch
WQ12




Knotty Spruce
WQ29




French Bobbin
WQ08



Boat Shed
WQ02



Nordic Plank
WQ15




Boardwalk
WQ10




Mocha Legno
WQ25



Mountain Lodge
WQ24




Wine Barrel
WQ03




Log Cabin
WQ04




Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21




Weathered Slate
WQ14




Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18




Charred Larch
WQ09



Shadow Oak
WQ28




Barn Door
WQ05



Black Walnut
WQ20




Scorched Timber
WQ26




Espresso Oak
WQ27


V-CUT



Black



Burnt Umber



Charcoal



Dark Taupe



Deep Brown








For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462

WoodBeQuiet Slats Wall Panels | April 2026

Sizes

Standard Sizes	1200mm W x 2800mm H <i>Custom sizes available</i>
V-cut Spacing	50, 101, 152, 203mm on center

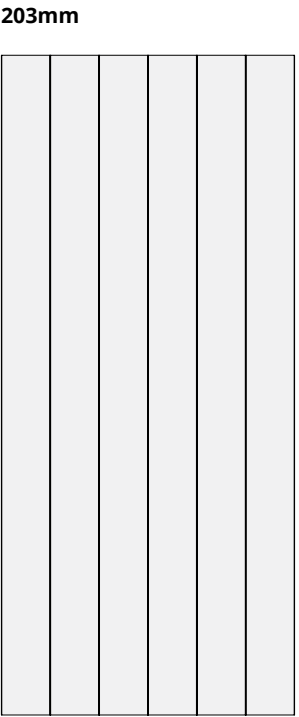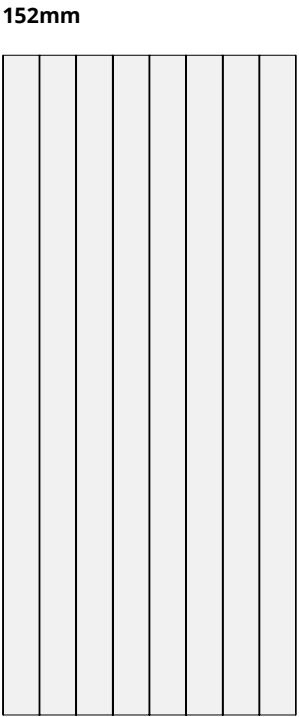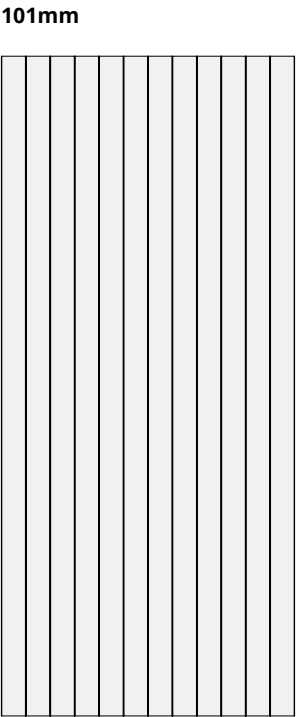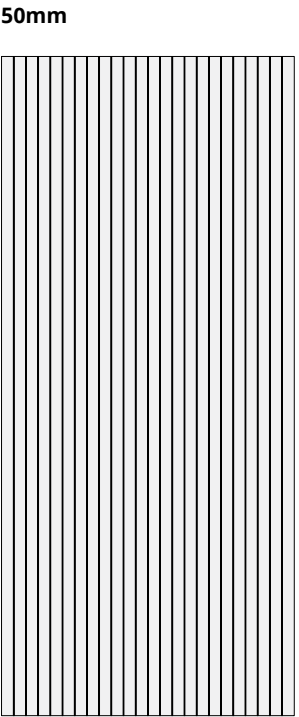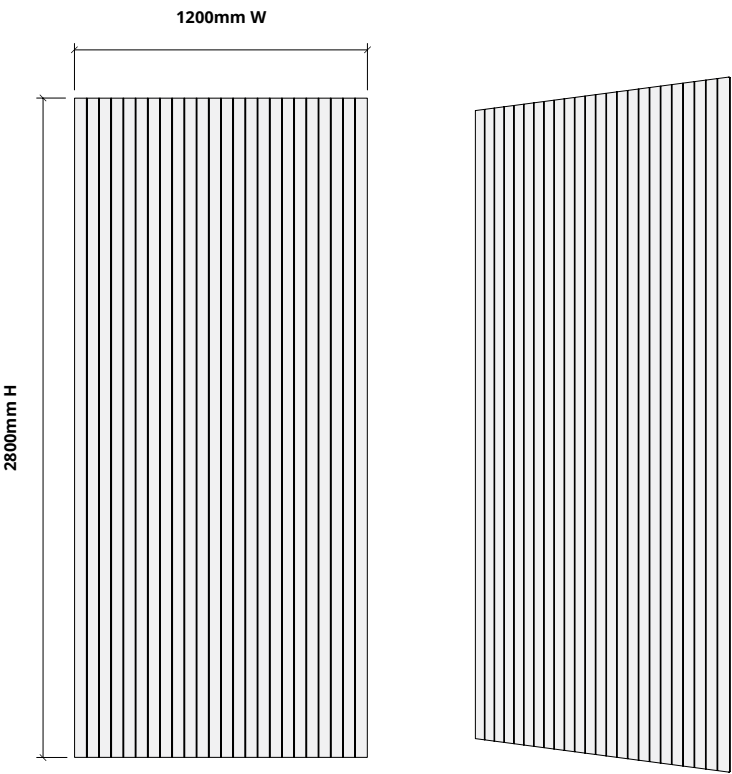

How to Specify


1. Choose V-cut Size

2. Choose Colorways


Slats are available in four v-cut sizes:




50mm O.C.



101mm O.C.



152mm O.C.



203mm O.C.


1. Choose V-cut Size

2. Choose Colorways

Select one colorway for your slats and one colorway for your v-cut.
See colorway choices on page 4.

Slats
Select one colorway

V-cut
Select one colorway

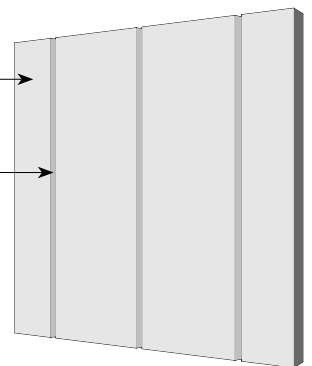

Color + V-cut Examples




50mm W Slats
Loft + Dark Taupe V-cut



101mm W Slats
French Bobbin + Burn Umber V-cut



152mm W Slats
Boardwalk + Deep Brown V-cut



203mm W Slats
Barn Door + Black V-cut




For questions or additional product information,
visit acoufelt.com.au or call 1800 626 462


WoodBeQuiet Slats Wall Panels | April 2026

Mounting Methods


Adhesive backing

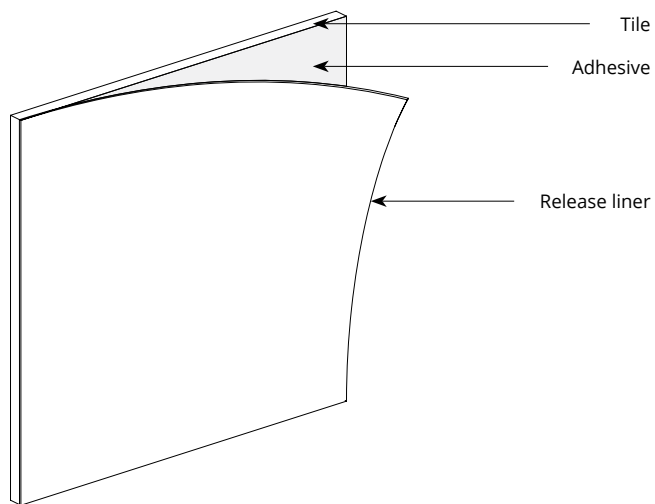

Construction adhesive

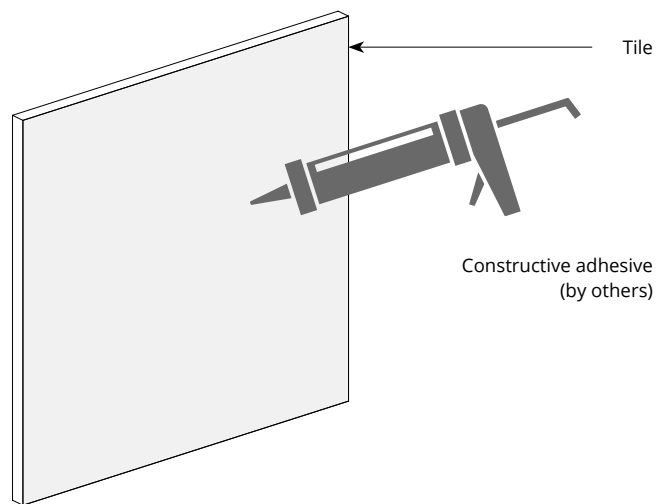

Z-clip wall mount

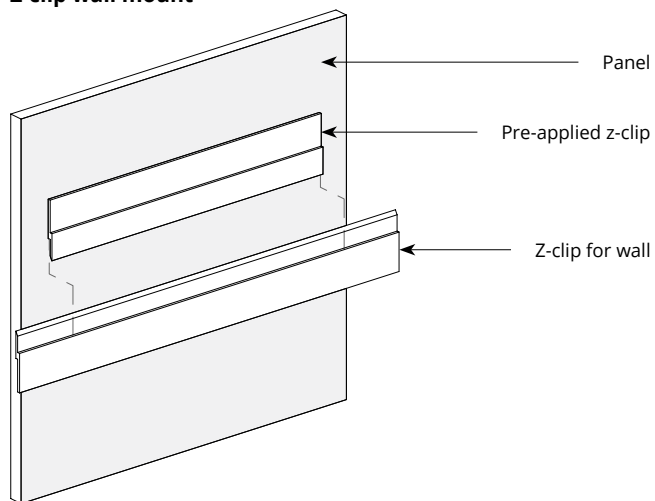

For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

WoodBeQuiet Slats Wall Panels | April 2026

Acoustic Performance

Test Method 12mm: ASTM C423-09a

Install Method A

Rating Method AS ISO 11654-2002

Test Results **12mm**


NRC 0.45, no air gap

NRC 0.54, 12mm air gap

NRC 0.64, 20mm air gap

SAA 0.43, no air gap

SAA 0.54, 12mm air gap

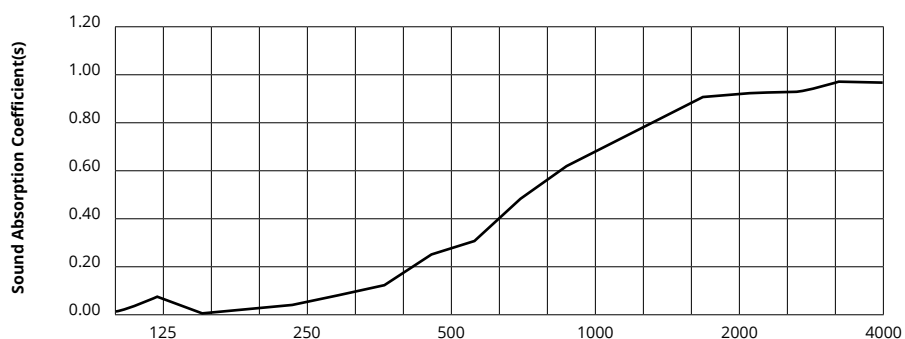

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	12mm	0.06	0.02	0.23	0.61	0.89	0.95	0.45

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.



For questions or additional product information, visit [acoufelt.com.au](https://www.acoufelt.com.au) or call **1800 626 462**

WoodBeQuiet Slats Wall Panels | April 2026