




WoodBeQuiet Planks Wall Tiles

WoodGrain Collection


WoodBeQuiet™ wall planks recreate the beauty of real wood and provide healthy soundscapes. Our QuietPrint™ technology applies high-resolution woodgrain images to our smooth, sound-absorbing felt without compromising its acoustic properties.

Specifications

Surface	Wall
Material	FilaSorb™ polyester felt
Weight	2400gsm
Standard Sizes	200 x 1000mm

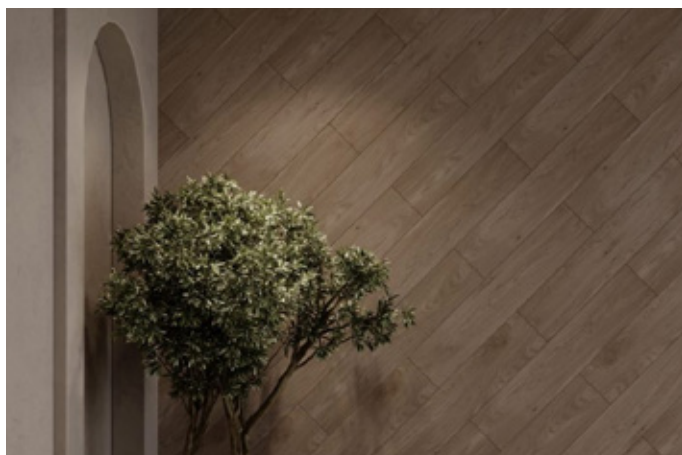

WoodBeQuiet Wall Planks in Weathered Slate

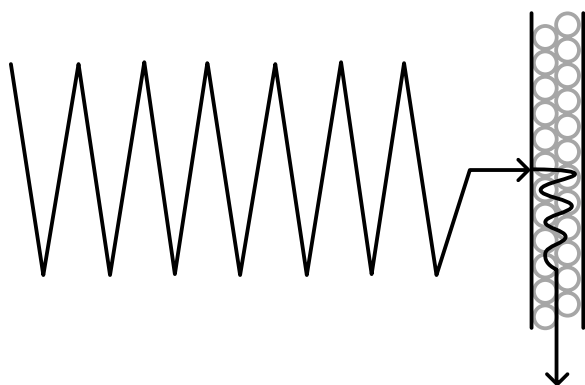

Many high-resolution printing techniques create an impenetrable layer that reflects sound. Acoufelt QuietPrint™ is applied with high precision, ensuring that air gaps remain open, absorbing sound and creating a high resolution image.

Technical

NRC Rating	0.45*
Fire Test	AS ISO 9705:2033 (according to AS 5637.7:2015 requirements) Group 1 0.93
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Test results available upon request.

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m ³
Recyclable	100%*
Certifications	Environmental Product Declaration Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.



For questions or additional product information, visit acoufelt.com.au or call 1800 626 462

WoodBeQuiet Wall Panels | April 2026

Colorways

WOODGRAIN



Picket Fence
WQ01



Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30



White Oak
WQ13



Baltic Birch
WQ12




Knotty Spruce
WQ29




French Bobbin
WQ08




Boat Shed
WQ02



Nordic Plank
WQ15




Boardwalk
WQ10




Mocha Legno
WQ25



Mountain Lodge
WQ24



Wine Barrel
WQ03



Log Cabin
WQ04



Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21



Weathered Slate
WQ14




Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19




Teak
WQ18




Charred Larch
WQ09



Shadow Oak
WQ28



Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27




For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call 1800 626 462

WoodBeQuiet Wall Panels | April 2026

Sizes


Standard Sizes

Height: 200mm H
Width: 1000mm W
Custom sizes available

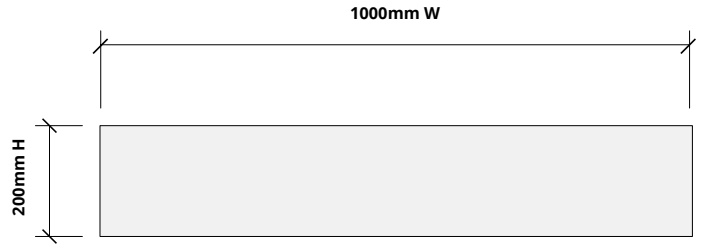


Layout Typical


Horizontal




Horizontal brick




Vertical brick




Diagonal brick



Vertical herringbone



Horizontal herringbone



How to Specify

1. Choose Colorway

2. Design Layout

See colorways on page 3.

1. Choose Colorway

2. Design Layout

See page 4 for typical design layouts or work with an Acoufelt representative to design your own.




For questions or additional product information,
visit [acoufelt.com.au](https://www.acoufelt.com.au) or call **1800 626 462**


WoodBeQuiet Wall Panels | April 2026

Mounting Methods

Adhesive backing

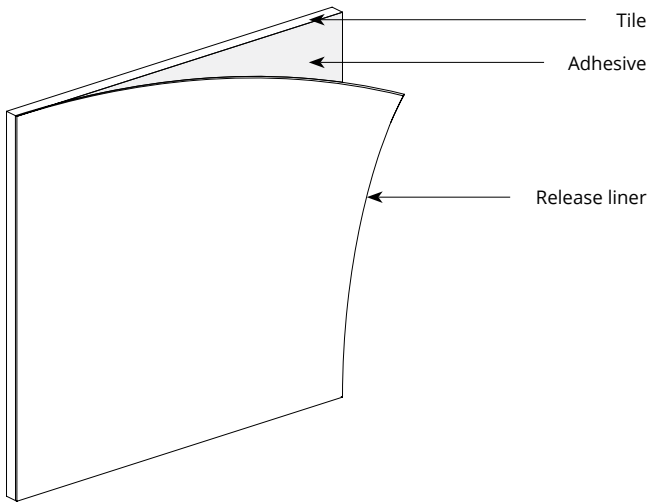


Construction adhesive

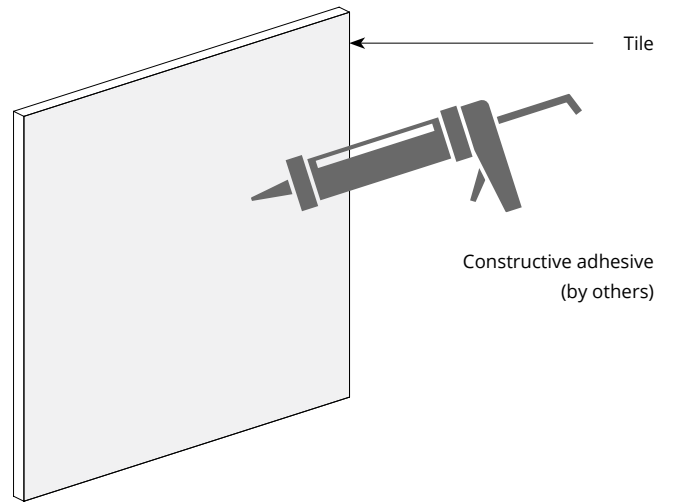

Acoustic Performance

Test Method	ASTM C423-09a
Install Method	A
Rating Method	AS ISO 11654-2002
Test Results	NRC 0.45, no air gap NRC 0.54, 12mm air gap NRC 0.64, 20mm air gap SAA 0.43, no air gap

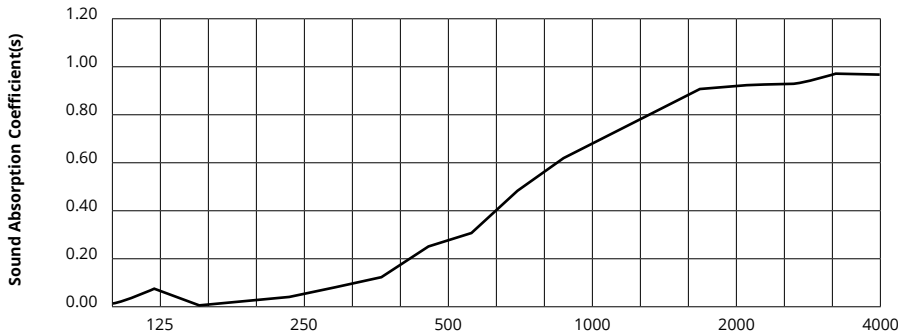


Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.06	0.02	0.23	0.61	0.89	0.95	0.45

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com.au or call **1800 626 462**

WoodBeQuiet Wall Panels | April 2026