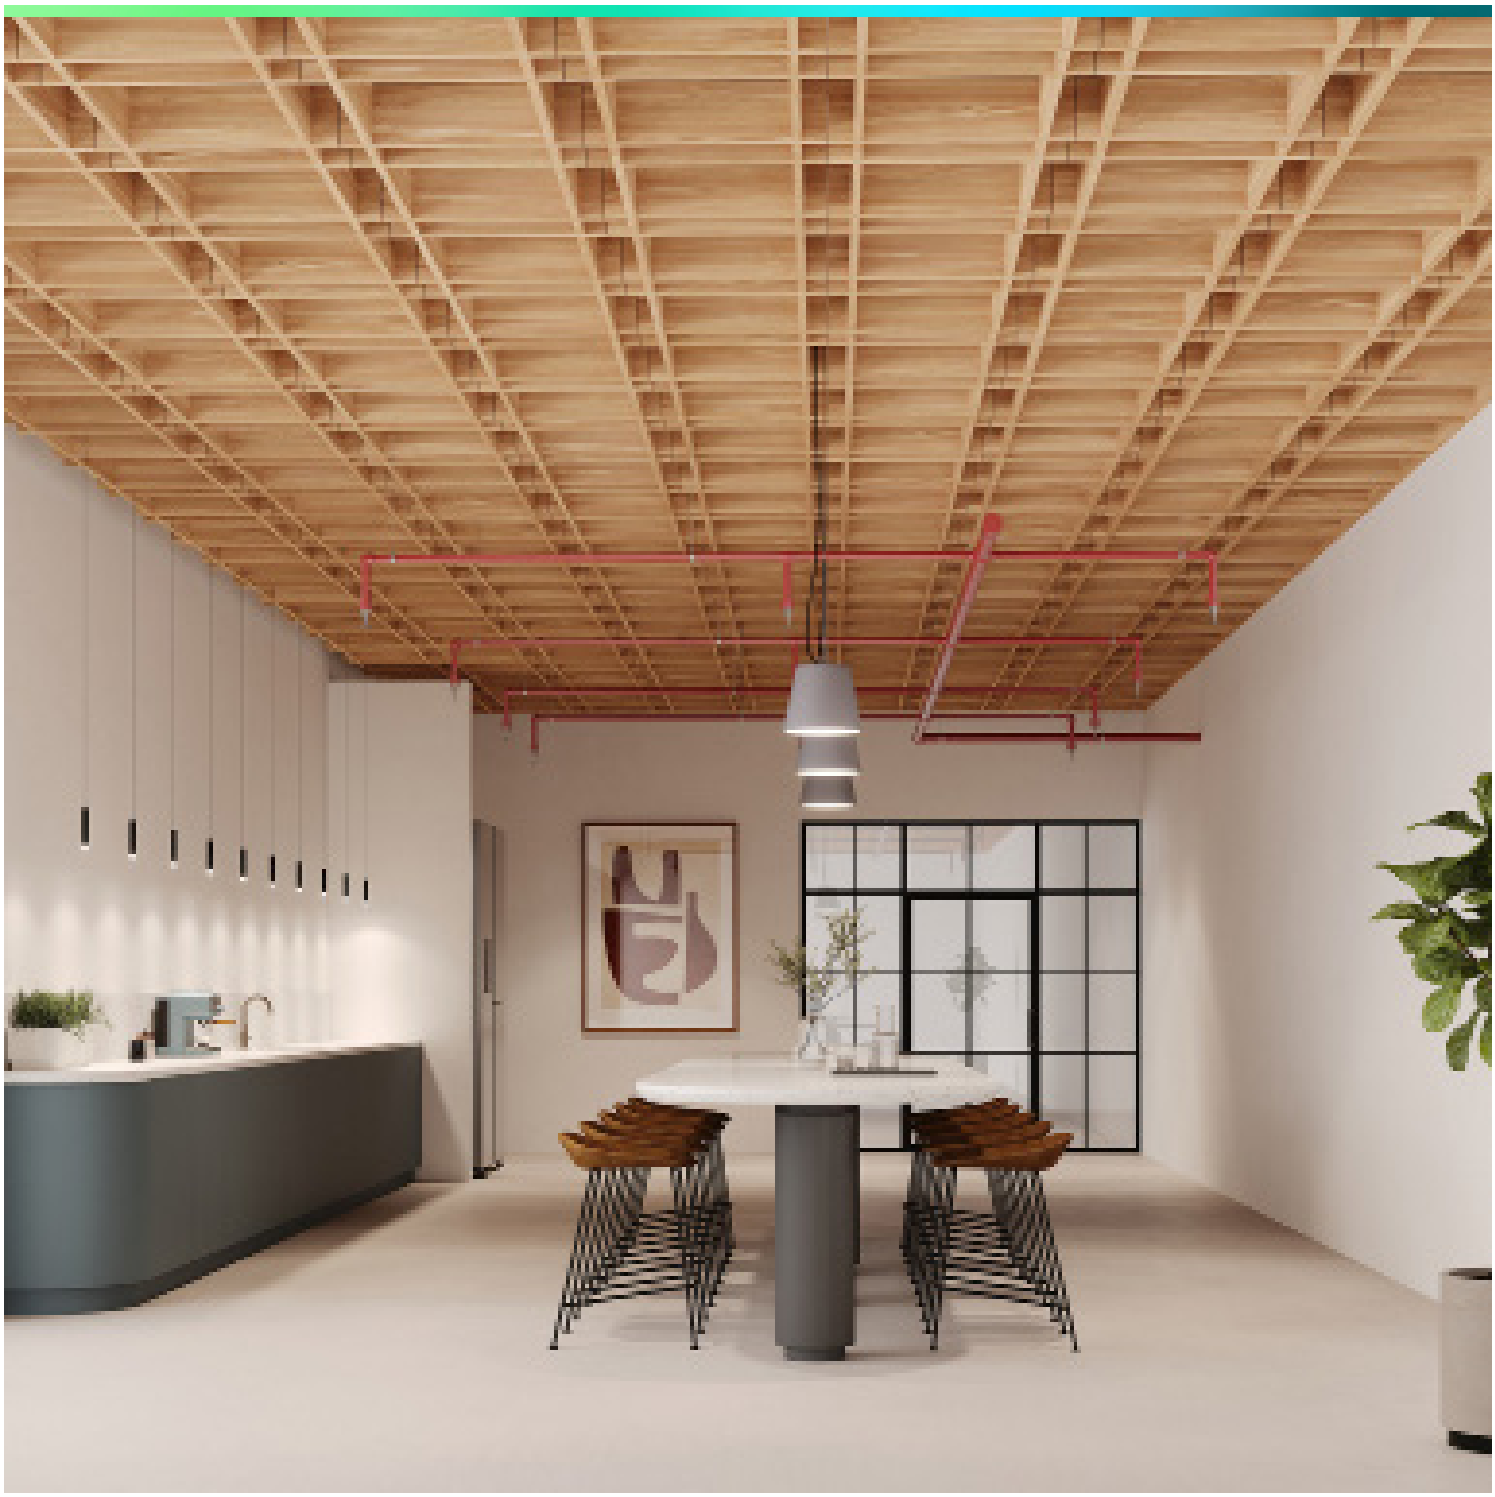


Woven, Gingham

Ceiling Frames

WoodGrain Collection

Woven's Gingham highlights a classic checkered pattern with evenly spaced, equal-sized vertical and horizontal lines, offering a timeless and structured aesthetic. Thoughtfully designed, it achieves an ideal balance of openness and acoustic performance while adding visual interest to any environment.

Specifications

Surface	Ceiling	
Material	FilaSorb™ polyester felt	
Thickness	12mm (±10%)	
Weight	2400gsm	
Standard Sizes	100mm H x 600mm W x 600mm L 150mm H x 600mm W x 600mm L	
Compatible T-grid	**Type**	**Layout**
	24mm Flat	Standard 600mm x 600mm
	14mm Flat	Standard 600mm x 600mm



Woven, Gingham Ceiling Frames in European Larch

Technical

NRC Rating	Pending product testing
Fire Test	Test Results Pending
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	Refer to Product Lead Time Matrix
Origin	Australia
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

** PET is recyclable through participating partners.*

© 2026 Acoufelt. All rights reserved.

Colorways

WOODGRAIN


Picket Fence
WQ01


Loft
WQ06


White Elm
WQ07


Lyed Larch
WQ30



White Oak
WQ13


Baltic Birch
WQ12


Knotty Spruce
WQ29


French Bobbin
WQ08



Boat Shed
WQ02


Nordic Plank
WQ15


Boardwalk
WQ10


Mocha Legno
WQ25


Mountain Lodge
WQ24


Wine Barrel
WQ03


Log Cabin
WQ04



Natural Oak
WQ16


Woodland Fog
WQ22



Driftwood
WQ21



Weathered Slate
WQ14


Petrified Ash
WQ23


Antique Chest
WQ11


European Larch
WQ17


Fumed Oak
WQ19


Teak
WQ18


Charred Larch
WQ09


Shadow Oak
WQ28


Barn Door
WQ05


Black Walnut
WQ20


Scorched Timber
WQ26

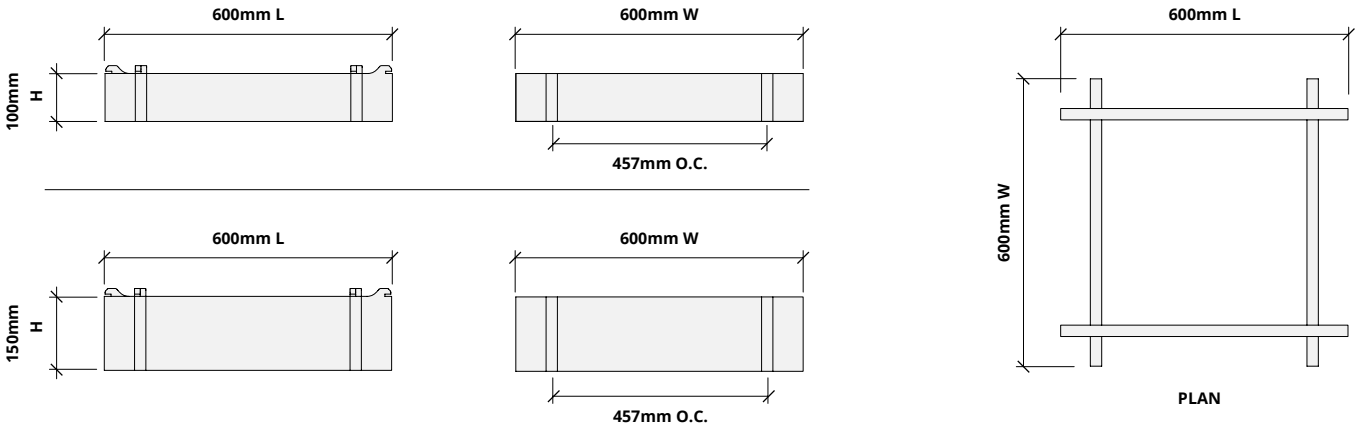

Espresso Oak
WQ27

© 2026 Acoufelt. All rights reserved.

How to Specify

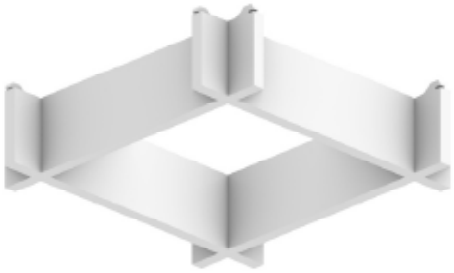
1. Choose Slat Height **2. Choose Colorways**

Slats are available in two heights:



1. Choose Slat Height **2. Choose Colorways**

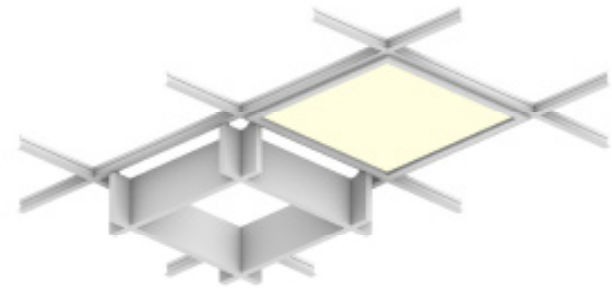
See colorway choices on page 3.



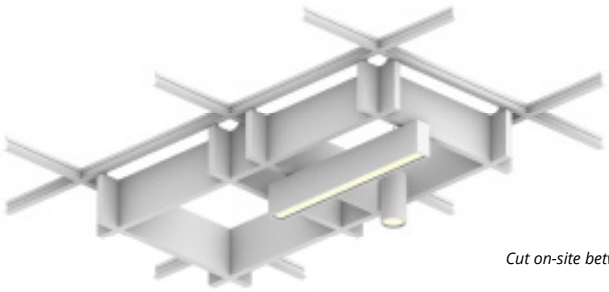
© 2026 Acoufelt. All rights reserved.

Lighting Coordination

600mm x 600mm Grid light

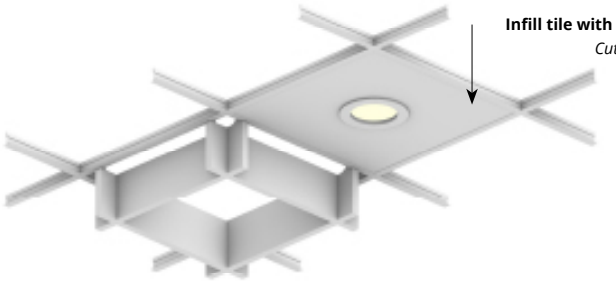


Drop pendant light



Cut on-site between slats

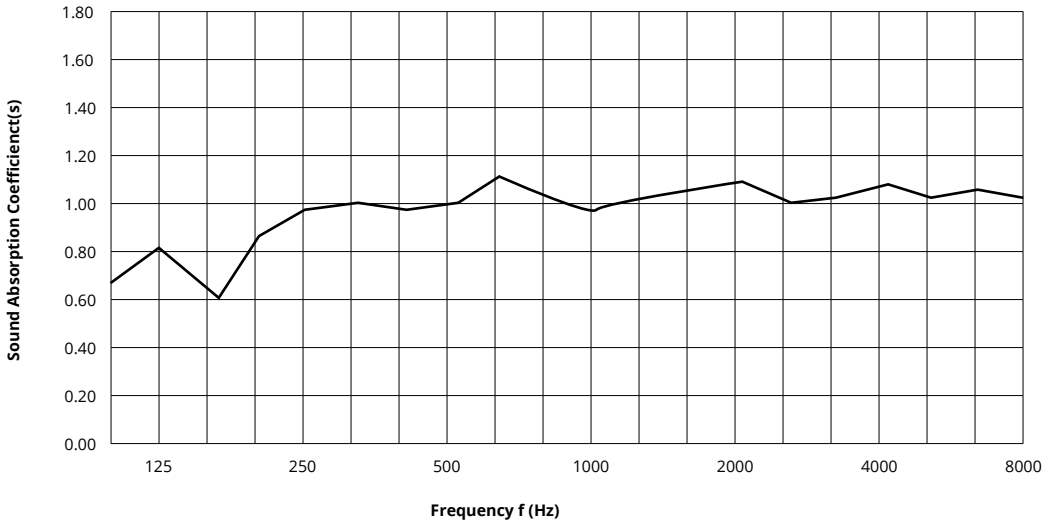
Recessed light



© 2026 Acoufelt. All rights reserved.

Acoustic Performance

Test Method	ASTM E795
Install Method	Type E-400
Rating Method	ASTM C423
Mounting Method	51mm W x76mm H slat on 12mm backer with 400mm air gap
Test Results	NRC 0.95 SAA 0.96



Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.67	0.86	0.96	1.02	1.04	1.00	0.95

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

© 2026 Acoufelt. All rights reserved.